
T/HIS Version 16.0



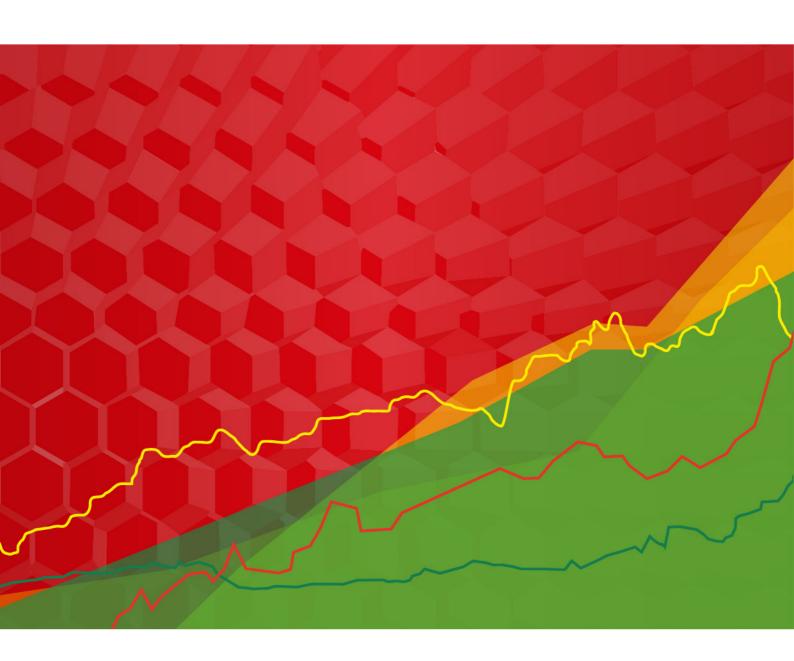

For help and support from Oasys Ltd please contact:

UK

The Arup Campus Blythe Valley Park Solihull B90 8AE United Kingdom

Tel: +44 121 213 3399 Email: dyna.support@arup.com

China

Arup
39/F-41/F
Huaihai Plaza
1045 Huaihai Road (M)
Xuhui District
Shanghai 200031
China

Tel: +86 21 3118 8875 Email: china.support@arup.com

India

Arup Ananth Info Park Hi-Tec City Madhapur Phase-II Hyderabad 500 081, Telangana India Tel: +91 40 44369797 / 98

Email: india.support@arup.com

Web:www.arup.com/dyna

or contact your local Oasys Ltd distributor.

0 Preamble	0.1
Text conventions used in this manual 1 Introduction	0.1 1.1
1.1 Program Limits	1.1
1.2 Running T/HIS	1.2
1.3 Command Line Options	1.4
2 Using Screen Menus 2.1 Basic screen menu layout	2.1 2.1
2.2 Mouse and keyboard usage for screen-menu interface	2.2
2.3 Dialogue input in the screen menu interface	2.4
2.4 Window management in the screen interface	2.4
2.5 Dynamic Viewing (Using the mouse to change views).2.6 "Tool Bar" Options	2.5 2.6
3 Graphs and Pages	3.1
3.1 Creating Graphs	3.1
3.2 Page Size	3.2
3.3 Page Layouts	3.2
3.3.1 Automatic Page Layout 3.4 Pages	3.2 3.6
3.5 Active Graphs	3.6
4 Global Commands and Pages	4.1
4.1 Page Number	4.1
4.2 PLOT (PL) 4.3 POINT (PT)	4.1 4.2
4.4 CLEAR (CL)	4.2
4.5 ZOOM (ZM)	4.2
4.6 AUTOSCALE (AU)	4.2
4.7 CENTRE (CE)	4.2 4.2
4.8 MANUAL 4.9 STOP	4.2
4.10 TIDY	4.2
4.11 Additional Commands	4.3
5 Main Menu	5.1
5.0 Selecting Curves 5.1 READ Options	5.1 5.6
5.2 WRITE Options	5.31
5.3 Curve Manager	5.33
5.4 Model Manager	5.46
5.5 EDIT Options	5.48
5.6 LINE STYLES 5.7 Command / Session Files	5.54 5.62
5.8 IMAGE Options	5.66
5.9 OPERATE Options	5.71
5.10 MATHS Options	5.78
5.11 AUTOMOTIVE Options 5.12 SEISMIC Options	5.79 5.86
5.13 MACRO Options	5.88
5.14 FAST-TCF Options	5.90
5.15 TITLE/AXES/LEGEND Options	5.94
5.16 DISPLAY Options 5.17 SETTINGS	5.103 5.107
5.18 MEASURE	5.112
5.19 Curve Groups	5.116
5.20 GRAPHS	5.119
5.21 PROPERTIES 5.22 UNITS	5.120 5.125
5.23 The Javascript Interface	5.130
5.24 Datum Lines	5.136
5.25 T/HIS Session Save and Retrieve	5.141
6 Other Options 6.1 Tool Bar	6.1 6.1
6.2 Graph Tool Bar	6.9
6.3 CURVE INFORMATION	6.11
6.4 Curve Histories	6.12
6.5 Keyboard Shortcuts	6.16
6.6 Preferences 6.7 PRIMER: Sychronising with PRIMER	6.20 6.21
7 FAST-TCF	7.1
7.0 FAST-TCF OVERVIEW	7.1
7.1 FAST-TCF INTRODUCTION	7.2
7.2 PAGE / GRAPH LAYOUT AND SELECTION	7.8

7.3 INPUT SYNTAX TO LOAD OTHER FILES	7.10
7.4 INPUT FOR DATA EXTRACTION REQUESTS	7.11
7.5 UNITS	7.29
7.6 CURVE TAGS	7.31
7.7 CURVE GROUPS	7.33
7.8 PERFORMING FAST-TCF CURVE OPERATIONS	7.34
7.9 APPLYING EXTRA OPTIONS TO DATA REQUESTS	7.38
7.10 Setting properties for curves	7.39
7.11 Defining Datums	7.41
7.12 FAST-TCF IMAGE OUTPUT OPTIONS	7.43
7.13 Outputting curve properties to text files, variables and REPORTER	7.51
7.14 FAST-TCF CURVE OUTPUT	7.55
7.15 FAST-TCF ADDITIONAL	7.56
8 Quick Find	8.1
Introduction	8.1
Fuzzy Matching	8.1
Search Terms	8.2
Tutorials	8.3
	0.3
Options	8.3
APPENDICES	A.1
APPENDIX A - LS-DYNA Data Components	A.2
APPENDIX B - T/HIS CURVE FILE FORMAT	B.1
APPENDIX C - T/HIS BULK DATA FILE FORMAT	C.1
APPENDIX D - FILTERING	D.1
APPENDIX E - INJURY CRITERIA	E.1
APPENDIX F - Curve Correlation	F.1
APPENDIX G - The ERROR Calculation	G.1
APPENDIX H - The "oa_pref" preference file	H.1
APPENDIX I - Windows File Associations	I.1
A DENDIX 1 - WHOWS I'LL ASSOCIATIONS	
APPENDIX J - T-HIS JavaScript API	J.1
APPENDIX K - Typed Commands	K.1
Installation organisation	L.1
Version 16.0 Installation structure	L.1
JaDe: The JavaScript debugger	M.1
	M.1
Viewing the script files and functions	
Adding/removing breakpoints	M.1
Running the script	M.2
Printing the value of a variable	M.3
The call stack	M.4
Exceptions	M.5
Licences used in software	
	N.1
Expat	N.1
FreeType	N.1
FFmpeg	N.3
Jpeg	N.3
Libcurl	N.3
Libfame	N.4
Libgif	N.4
Libpng	N.4
Libxlsxwriter	N.5
Openssl	N.7
PCRE	N.8
PDFHummus	N.9
POV-Ray	N.9
SmoothSort	N.9
Spidermonkey	N.10
Win-iconv	N.14
Zlib	N.14
Fonts on Linux	0.1
RedHat / CentOS 7	0.1
SUSE 12	O.1

0 Preamble

Text conventions used in this manual

Typefaces

Three different typefaces are used in this manual:

Manual text This typeface is used for text in this manual.

Computer This one is used to show what the computer types. It is also used for equations, keywords (eg

type *PART) etc

Operator This one is used to show what you must type.

type

Button text This one is used for screen menu buttons (eg APPLY)

Notation

Triangular, round and square brackets have been used as follows:

• Triangular

```
To show generic items, and special keys. For example:<list of integers> <filename> <data component><return> <control Z> <escape>
```

Round

To show optional items during input, for example:<command> (<optional command>) (<optional number>)

And also to show defaults when the computer prompts you, eg:

```
Give new value (10) :
Give model number (12) :
```

Square

To show advisory information at computer prompts, eg

```
Give filename: [.key] :
THIS >>> [H for Help] :
```

1 Introduction

T/HIS is an x/y plotting program, specifically written to perform two functions:

- 1. To produce time-history plots from transient analyses, such as those performed using LS-DYNA.
- 2. To plot any form of x/y data that is produced either by a program or by directly typing in values.

T/HIS is a graphically driven, interactive program. Input and manipulation of data is through a graphical user interface on systems capable of running X-Windows applications; selections are made through "pressing buttons" using a mouse. On machines not capable of running X-Windows it is also possible to use T/HIS in a "command line" mode of operation; instructions are entered through the keyboard to perform the required operations.

1.1 Program Limits

There are a number of limits in T/HIS of which the user should be aware. These are listed below:

Number of graphs T/HIS can have a maximum of 32 graphs

Number of curves The number of curves is unlimited

Number of points The number of points that can be defined per curve is

unlimited.

Time-history blocks In the interface to the LS-DYNA time-history (.thf)

file there is a limit of 100,000 items in each of the node, solid, beam, shell and thick shell time-history blocks: thus

500,000 items overall.

In the interface to the LS-DYNA extra time-history (.xtf) file up to 100,000 nodal reactions (or groups of

reactions) may be processed.

Number of colours By default, T/HIS curves wrap around the following six

colours in order:

WHITE RED GREEN BLUE CYAN MAGENTA

However, a further 24 predefined colours are available if

required and 6 user defined ones can be created.


Title The title can contain up to 80 characters.

Labels Labels for axes and lines can contain up to 80 characters.

1.2 Running T/HIS

1.2.1 Starting the code

For users on a device with a window manager T/HIS is run from the **T/HIS** button in the SHELL:

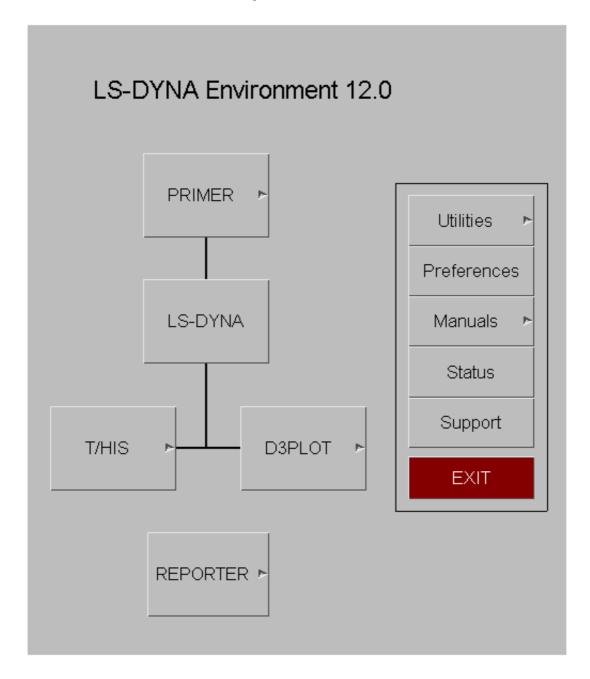

If your system has been customised locally you may have to use some other command or icon: consult your system manager in this case.

1.2.2 Graphics Driver and Platforms

T/HIS 9.3 onwards use a OpenGL graphics driver.

Both the 32 and 64 bit versions of T/HIS use 32bit (single precision) numbers to store and plot data. The 32 bit version is limited to a maximum of 4GB of memory on all platform (3GB on windows).

1.2.2.1 "Batch" Mode

T/HIS can run in "batch" mode where the main application window is not displayed on the screen. "Batch" mode is available on all platforms.

To start T/HIS in batch mode use the command line option "-batch".

```
e.g. this14 64.exe -tcf=script.inp -batch
```

When running in "batch" mode T/HIS will automatically exit at the end of the script regardless of whether or not "-exit" is specified.

NOTE: All image, postscript and PDF outputs require a DISPLAY on UNIX / LINUX systems. If you are running T/HIS in "batch" mode as part of a automatic post processing script then T/HIS must have a X Windows DISPLAY even though the main window is not displayed. If the machine you are using is a server or part of a cluster without an X-Server then T/HIS can be used with the Xvfb software.

1.2.3 Selecting a device when a window manager is not running

If you are running on a non-window device, for example a Tektronix display or emulator, you may not be able to use screen menus. Instead you will have to run in "command-line" mode.

It is very unlikely that a user on a modern workstation will see these options, since the machine will have a window manager and will be running in "screen menu" mode. If they do appear it suggests that the machine and/or software are wrongly set up: see 1.2.4 below for suggested remedies.

1.2.4 If T/HIS will not start in "screen-menu" mode

You may be running on a device with a window manager, but still only get the command-line prompt (and probably no menu driven _93 shell either).

This is almost certainly because of one or both of the following setup errors:

(1) The DISPLAY environment variable has not been set up, or has been set incorrectly. This tells the X11 window manager where to place windows, and it must be set to point to your screen. Its generic setup string is:

```
setenv DISPLAY <hostname>:<display number> (C shell syntax)
```

Where <hostname> is your machine's name or internet address, for example:

```
setenv DISPLAY: 0 (Default display: 0 on this machine)
```

```
setenv DISPLAY tigger: 0 (Default display :0 on machine "tigger")
```

```
setenv DISPLAY 69.177.15.2:0 (Default display :0, address 69.177.15.2)
```

You may have to use the raw network address if the machine name has not been added to your /etc/hosts file, or possibly the "yellow pages" server hosts file.

(2) Your machine (strictly the X11 "server") has not been told to accept window manager requests from remote machines. This is usually the case when you are trying to display from a remote machine over a network, and you get the message similar to:

```
Xlib: connection to "<hostname>" refused by server
```

Xlib: Client is not authorised to connect to server

In this case go to a window with a Unix prompt on your machine, and type:

xhost +

Which tells your window manager to accept requests from any remote client. It will produce a confirmatory message, which will be something like:

access control disabled, clients can connect from any host

If T/HIS still fails to work then please contact your system manager, or contact Oasys Ltd for advice and help.

1.2.5 Command Line Mode

Command line mode is the main method of data input on non X-Windows devices. Command line mode is also available within the X-Windows screen interface and is accessed through the dialogue window. In command line mode the user will be presented with a prompt which also indicates which level of the menu structure the user is at. For example:

Defaults >

In response to the prompt a valid option must be given. These are usually a two or three letter abbreviation of a command; for example **PL** is the command to plot a graph. A list of the commands available is provided by typing **M** (for Menu). In addition to commands specific to one menu there are a number of commands which have the same effect throughout T/HIS.

- Q (Quit) Abort and return to current menu
- ! Go up a level in the menu structure
- / Return to the top level menu
- ; Equivalent to a <carriage return> in a string of commands
- M Lists menu.

Several commands can be strung together on one line, separated by spaces, for example:

/DE GR ON

Numeric data can also be included in the command line if required, for example:

/OP ADX #1 7.2

Commands can be in upper or lower case.

As well as menu level commands you will be asked questions such as:

```
THF file to read (filename 1)?
```

The default response, if one exists, is given in parentheses.

1.3 Command Line Options

Instead of starting T/HIS using the Command shell it is also possible to start T/HIS from the command line with a number of optional input parameters. Starting T/HIS from the command line offers a number of advantages.

- Faster start-up is possible by pre-selecting the device type.
- The input filename can be specified and opened automatically.
- Faster start-up is possible by pre-selecting the device type

Argument format:

<application name> (<arg 1>) ... (<arg n>) (<input filename>)

T/HIS 15.0 can be started with a number of optional command line options

Graphics device type	-d= <device type=""></device>	Valid device types are:	
	eg -d=default	opengl	OpenGL
		tty	No windows
		default	OpenGL

Command file name	-cf= <filename></filename>	Any valid T/HIS command file filename
	eg-cf=run 1.tcf	
FAST-TCF input file		Any valid T/HIS FAST-TCF command file
17151 Tel impat ine		filename
	eg-tcf=run 1.inp	
Settings file	-set= <filename></filename>	Any valid T/HIS settings file
	eg -set=this001.set	
Javascript	-js= <filename></filename>	Any valid T/HIS JavaScript file
	eg -js=sort curve.js	
Javasarint Argumants		Any valid string
Javascript Arguments	-js_arg= <argument></argument>	Any valid string.
	eg -js_arg=abc 	The arguments can be accessed in the script by using the global arguments array.
		Multiple arguments can be given to a script by using more than one -js_arg command line argument.
LS-DYNA Model	<filename></filename>	Any filename from the analysis
All the files associated with the model are opened and the contents scanned.	<u> </u>	This should be the last argument on the command line.
LS-DYNA Model list	-model_list= <filename></filename>	The model list file should contain the full pathname of one file from each model that
Specify a file containing a list of models for T/HIS to automatically open.	eg -model_List=job_list	T/HIS should open. Each file should be on a seperate line and it should be the first item on each line (other items seperated with commas
		can be specified on the same line for use with REPORTER).
Model Database file	-mdb= <filename></filename>	The model database file is an XML format file that contains information on where models are
Specify the name of the default model database file.	eg -mdb=database.xml	located along with a brief description of each model The model database can be used to easily select multiple models
T/HIS curve file	-cur= <filename></filename>	and the second s
This curve me	or -curve= <filename></filename>	
Specify a T/HIS curve file containing		
one or more curves for T/HIS to		
automatically open.	eg -cur=test.cur	
T/HIS curve file list		The curve list file should contain the full
		pathname of each cure file that you want T/HIS
Specify a file containing a list of curve		to open. Each file should be on a separate line.
files for T/HIS to automatically open.		
	eg -cur=test.cur	
T/HIS bulk data file	-bdf= <filename></filename>	
Specify a T/HIS BDF file containing one or more curves for T/HIS to automatically open.	eg-bdf=test.cur	
Automatically maximises the T/HIS window so that it occupies the full screen.	-maximise	
Read THF file	-thf= <yes no=""></yes>	
Read XTF file	-xtf= <yes no=""></yes>	
Read LSDA (binout) file	-1sda= <yes no=""></yes>	
Read ASIIC files	-ascii= <yes no=""></yes>	
Specifying a custom "oa_pref" file.	-pref= <filename></filename>	<pre><filename> must be a valid "oa_pref" file.</filename></pre>
This causes an extra, optional "oa_pref" file to be read.		If it has no path prefixed, the file is assumed to be in the OA_INSTALL directory. Any legal filename may be used.

Use ELOUT instead of ELOUTDET	-use_elout= <yes no=""></yes>	By default T/HIS uses the ELOUTDET part of the LSDA file in preference to ELOUT if the LSDA file contains both. This option can be used to force T/HIS to use the ELOUT data when reading Shell and ThickShell data as the ELOUT data can be in the global coordinate system instead of the element local coordinate system.
Specify a directory for T/HIS to start in.	-start_in= <directory></directory>	Any valid directory
Set the width of the T/HIS graph window (in pixels)	-xres= <size> eg -xres=800</size>	
Set the height of the T/HIS graph window (in pixels)	-yres= <size></size>	
Run T/HIS without the console window.	-noconsole	Windows only.
	-batch	For this option to work you must also specify a command file "-cf=filename" and the name of the PTF file to open. This option will automatically set "-exit" so that D3PLOT terminates after playing the command file.
Redirect output from the console window to a file on Windows. To redirect output on Unix/Linux use the shell redirection options (typically > for <stdout>, & for <stderr>)</stderr></stdout>	-eo= <filename> -eo -eo=default</filename>	-eo= <filename> is designed for the user to suppress the console and redirect logfile output to the specified filename. In order to permit multiple sessions to coexist on the same machine the process id will be appended to the <name> part of the filenameto give <name>_pid.<ext>. If plain "-eo" or "-eo=default" are found then filename generation is automatic, and the first valid of: %TEMP%\this_log_<pid>.txt %TMP%\this_log_<pid>.txt %HOMESHARE%\this_log_<pid>.txt %USERPROFILE%\this_log_<pid>.txt</pid></pid></pid></pid></ext></name></name></filename>
Stop and exit after command file	-exit	will be used.

Some examples for T/HIS might be:

pathname/this12.exe -d=x run_2.thf (Use device X, open a .thf file)
pathname/this12.exe -d=tty cf=batch.tcf -exit(No graphics, run command file)
Note that no spaces should be left in the syntax <arg>=<value>.

For example: "-d = x" is illegal.

Correct syntax is: "-d=x"


2 Using Screen Menus

- 2.1 Basic screen menu layout 2.2 Mouse and keyboard usage
- 2.3 Dialogue input
- 2.4 Window management
 2.5 Dynamic Viewing (Using the mouse to change views)
- 2.6 Graphics Box Options

Versions of T/HIS prior to release 6.1 only had a "command-line" interface. This has been preserved for backwards compatibility, but a "screen-menu" interface has been added which allows you to drive the program almost entirely


2.1 Basic screen menu layout

T/HIS runs within a single window, owned by the window manager, which has several sub-windows inside it. A typical T/HIS session will look like this:

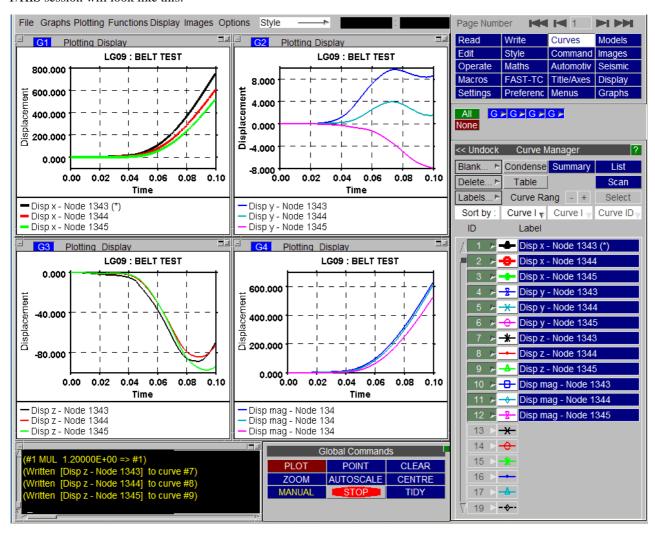

The various sub-windows always exist within the master window, and may be moved and resized at will inside it. They will keep their relative size and position as the master window is changed in size and/or shape, and will reappear after the main window is de-iconised.

The default layout of the main sub-windows is as follows:

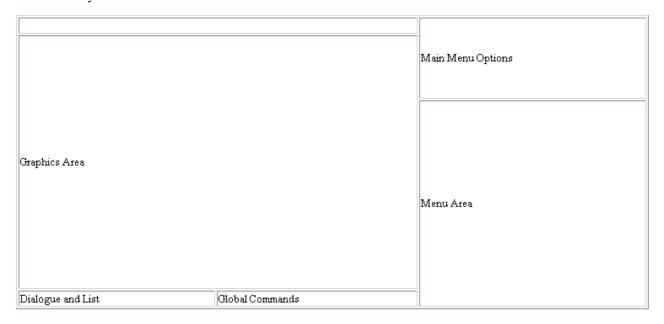

These windows cannot be dismissed. A brief description of their functions is:

Provides access to the majority of the commands and options available in T/HIS through a series of Main Menu

Options sub menus (see Section 5).

Is where graphs are drawn. In T/HIS 15.0 this area can contain a maximum of 32 graphs (see Graphics area

Section 3). Alternativley if graphs have been organised into pages (see Section 3.3) then this area

will display a single page of graphs.

Dialogue & list Allows "command-line" input and output, also provides a listing area for messages.

Menu Area Displays the commands and options associated the current selection from the main menu options.

Global Gives access to commonly used commands (see Section 4). Commands

While you are free to reposition these master windows it is recommended that you keep to this default layout. This is because when further sub-windows appear their position and size is designed assuming this layout, and aims to obscure as little useful information as possible.

2.2 Mouse and keyboard usage for screen-menu interface

All screen-menu operations are driven with the left mouse button, with the following exceptions:

- (a) Text in the dialogue area and text boxes requires keyboard entry.
- (b) Text strings saved in the cursor "cut" buffer may be "pasted" into dialogue areas and text boxes using the middle mouse button.

The primitive "widgets" in the menu interface are used as follows:


BUTTONS:

Screen buttons are depressed by clicking on them, but action only takes place when the mouse button is released, so it is safe to drag the (depressed) mouse around the screen.




Buttons may also be greyed out to indicate that the option is not currently available. Buttons with "..." after them will usually invoke sub-menus.

"Popup" window invocation: Buttons with an ">" symbol may be selected normally with the left mouse button, but if the *right* mouse button is depressed over them it will invoke a "popup" window. Holding the right mouse button down move the cursor into this window to make a selection, or move elsewhere and release the button to deactivate the popup.

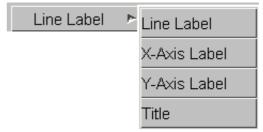

SLIDERS:

Sliders are moved by clicking on the slider button itself, and then dragging it to a new position. They may also be moved automatically by clicking on, and holding down, one of the arrows at either end.




TEXT BOXES:

Contact Test

To enter text in a text box: first make it "live" by clicking on it, then type in text, then type return to enter the string. Clicking on a "live" box for a second time is exactly the same as typing return, so clicking twice on a box effectively enters its current contents. You can use the left and right arrow keys for line editing within a box: text entry takes place after the current cursor position.

RADIO BOXES

A "radio" set is provided where only one selection is possible from a range of options. In this example the postscript laser output has been set to a single image per page.



MENU SELECTIONS:


Menus of items are used when you need to make one or more selections from a (potentially) long list. Click on the row you want to select: clicking on a row that is already selected will have the effect of unselecting it. When the list is too long to display in the window you can use the vertical scroll-bars to move up and down it.

A range of items may be selected by either

 Click on the first item and hold down the mouse key, drag the mouse to the last item in the list. All items between the first and last including the first and last are selected.

or

Click on the first item, hold down the SHIFT key and click on the last item in the list. All items between the first and last including the first and last are selected.

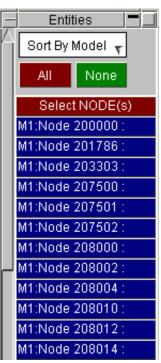

2.3 Dialogue input in the screen menu interface

The full command-line capability is preserved when T/HIS is running in screen-menu mode, and you are free to mix command-line and mouse-driven input at will. There are some situations in which command-line input is more efficient: for example when entering lists of explicit entities.

Commands are entered in the dialogue box:



As this example shows the dialogue box is also used for listing messages, warnings and errors to the screen. It can be scrolled back and forth (its buffer is 200 lines long) to review earlier messages. The following colours are used:

Normal messages and prompts Yellow
Text typed in by you White
Warning messages Magenta
Error messages Red

There is a minor limitation when mixing command-line and screen-menu mode: you cannot perform the same function simultaneously in both modes. If you attempt to do so you will get the message:

WARNING: recursive access attempted

And you will not be permitted to continue.

2.4 Window management in the screen interface

Moving, resizing and scrolling of windows is based on the conventions used in the Motif Window Manager.

To move a window:

Click down on its title bar, then drag the window to where you want it to be. A "rubber-band" outline moves to show the window's current position.

To resize a window:

Either

Click on a border bar to move just that side, or on a corner bar to move both sides attached to that corner. Again, a rubber-band outline shows you the new shape.

or

Use the **MAXIMISE** button in the top right hand corner of the window to increase the size of the window to the largest possible size.

To scroll a window:

If a window has got too small for its contents then horizontal and/or vertical scrollbars will appear. Click on a scrollbar slider and move it to the desired position, the window contents will scroll as you do so. Alternatively click on the arrows at either end of the scrollbar for timed motion in that

direction.

To minimise a window:


Click on the button in the top right hand corner of the window. When a window has been iconised it will appear in the **ICON** area at the bottom of the screen.

To restore a window:

Iconised windows may be restored by clicking on the icon in the ICON area.

2.5 Dynamic Viewing (Using the mouse to change views).

"Dynamic" viewing is the name given to the process in which you perform viewing transformations by moving the mouse around the screen.




2.5.1 Dynamic Translation.

Dynamic translation uses <mid mouse> + <left shift>



The cursor symbol is yellow, and looks like:

The relationship between mouse and image motion is intuitive: the object tracks the mouse motion in the screen XY plane. The initial position of the mouse is irrelevant.

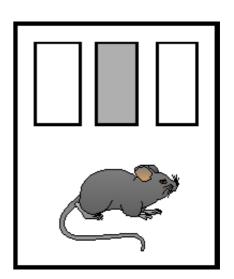


2.5.2 Dynamic Magnification (Scaling).

Dynamic scaling uses <right mouse> + <left shift>




The cursor symbol is green, and looks like:

Mouse motion to the right and up makes the image larger, left and down smaller. The initial position of the mouse is irrelevant. A horizontal movement will scale just the x-axis while a vertical movement will scale just the y-axis.

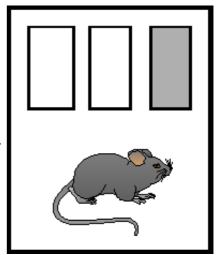

2.6 "Tool Bar" Options

Across the top of the main graphics window are a number of buttons that can be used to access other T/HIS menus (see Section 6.1) for more details..




If the graphics box is <u>maximised</u> to take up the whole of the main window these buttons can be used to access the rest of the T/HIS menus without having to resize the graphics box between commands. Almost all of the options and functions in these menus may also be accessed from other menu locations, e.g. the Main Menu area.

3 Graphs and Pages

- 3.1 Creating Graphs
- 3.2 Page Size
- 3.3 Page Layouts
- 3.4 Pages 3.5 Active / Inactive Graphs

T/HIS15.0can display a maximum of 32 graphs. Each graph can have a different appearance and they can display different curves.

Graphs can be laid out using a number of different formats and they can be organised into 'Pages'.

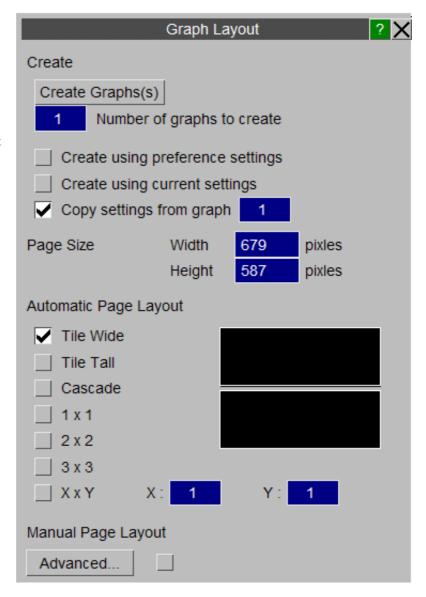


3.1 Creating Graphs

Create Graphs Create a new graph.

The shortcut key 'G' can also be used to create new graphs.

Number of graphs to create

This option can be used to create multiple graphs.

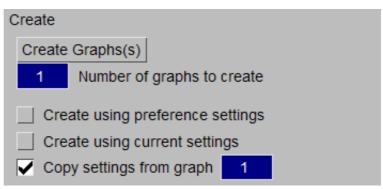

When new graphs are created the initial settings for each graph can be copied from 3 different sources.

Create using preference settings

Copy settings from graph n

The Display and Axis Settings are copied from the preference file.

Create using current

The <u>Display</u> and <u>Axis Settings</u> are copied from the current settings in the Display and Axis menus.

settings Display

The Display and Axis Settings are copied from the specified graph.

3.2 Page Size


These options can be used to specify the total size of the area (in pixels) used by the graph windows.



3.3 Page Layouts


3.3.1 Automatic Page Layout

If an Automatic page layout is used and the layout is set to 1 x 1, 2 x 2, 3 x 3 or X x Y T/HIS will automatically create multiple pages and position the graphs on each page if required.

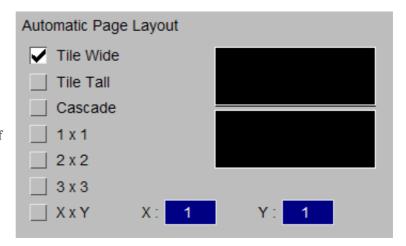

Tile Wide


All of the graphs are positioned on a single page.

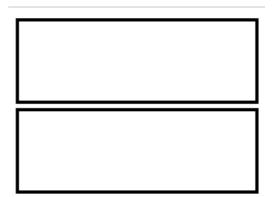

User manual Version 16.0, March 2019 **Tile Tall** All of the graphs are positioned on a single page. **Cascade** All of the graphs are positioned on a single page 1 x 1 Each graph is positioned on it's own page. 2 x 2 Graphs are arranged in a 2 by 2 grid. If there are more than 4 graphs then graphs 1 to 4 are positioned on page 1, 5 to 8 on page 2 \dots

3 x 3


Graphs are arranged in a 3 by 3 grid. If there are more than 9 graphs then graphs 1 to 9 are positioned on page 1, 10 to 18 on page 2 ...

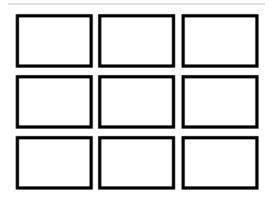

XxY

Graphs are arranged in a X by Y grid.

3.3.2 Manual Page Layout




Manual page layout can be used to give more control over which graphs appear on which page. Unlike the Automatic page layouts a graph can appear on more than one page.

Advanced


The Advanced option displays the Page Layout menu.

This menu can be used to select which graphs appear on each page. Each graph can appear on more than one page.

A range of graphs can be added/removed from pages by selecting the first graph/page combination and then holding down **SHIFT** while selecting the second graph/page.

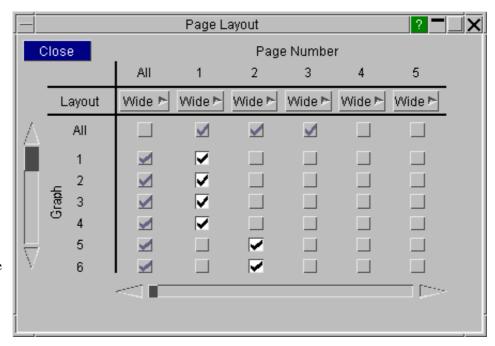



Each page can have a different layout or they can all be the same.



With the Advanced option the **Graph Layout** options work in exactly the same way as the <u>Automatic Page Layout</u> options, except they only position the graphs defined on each page.

If for example T/HIS has 6 graphs defined and graphs 2,3,4,5 are defined on page 1 and graphs 1 and 6 are on page 2 then the different graph layout options would produce the following.

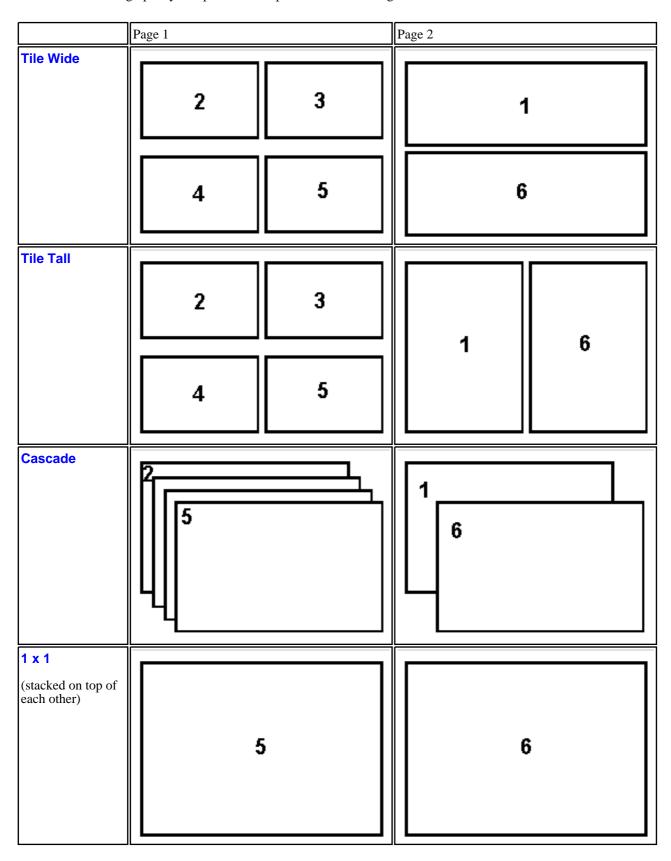

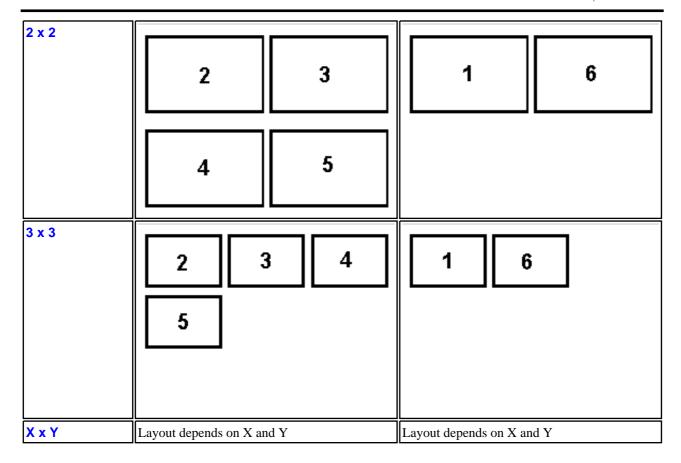

3.4 Pages

T/HIS can have a maximum of 32 pages, each page can contain multiple graphs. For more information on selecting the currently displayed page see Section 4.1. The Image Output options and the FAST-TCF Create option can produce output for either a single page or multiple pages if graphs are located on more than one page.

3.5 Active Graphs

If T/HIS contains more than one graph then each graph can be toggled between being active or inactive.



All the graphs can be activated using the **All** button or deactivated using the **None** button.

There is a popup menu attached to each button that can be used to select that graph **Only**, **Raise** the graph so that it is in front of any others or to **Delete** the graph.



When a graph is deleted any graphs with higher numbers are renumbered downwards to remove any gaps in the graph numbering.

Graphs can also be activated / deactivated using the button located in the top left hand corner or each graph.



The options in the $\underline{\text{Display}}$ and $\underline{\text{Title/Axes}}$ menus that control the appearance of graphs are only applied to active graphs.

When new curves are created by reading in data from files the new curves are automatically unblanked in all of the currently active graphs and blanked in any inactive graphs.

4 Global Commands and Pages





4.1 Page Number
4.2 PLOT
4.3 POINT
4.4 CLEAR
4.5 ZOOM
4.6 AUTOSCALE
4.7 CENTRE
4.8 MANUAL
4.9 STOP
4.10 TIDY
4.11 Additional Commands

The following commands are to be found as buttons on the **GLOBAL MENU** panel. (The command line codes are given in parentheses.)

All of the commands in the GLOBAL MENU can also be accessed via the **PLOTTING** button at the top of the graphics window.

4.1 Page Number

If T/HIS contains more than one graph (see section 3.1) then the graphs can be positioned on seperate Pages within T/HIS. This menu can be used to select a specific page or it can be used to step through the pages one by one.

Shortcut Key

Goto Page 1 Home Go back 1 Page Page Up Goto Page (n) N/A Go back 1 Page Page Down Goto Page 32 End

4.2 **PLOT** (PL)


This option will plot all the curves that are currently UNBLANKED (see Section 5.3).

4.3 **POINT** (PT)

When selected this option waits for the user to pick a point in the main graphics screen.

Once a point has been picked the <x> and <y> values of the point picked are reported along with the ID of the nearest curve and the nearest point on that curve.

After a point has been selected on the screen the slider may be used to move to other points along the same curve.

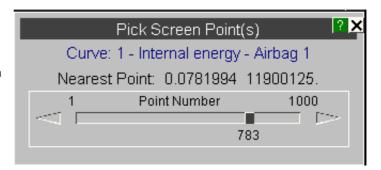

4.4 **CLEAR** (CL)

Clears the graphics screen.

4.5 ZOOM (ZM)

The cursor appears on the screen and may be used to select the required plot area by choosing opposite corners of a box. The graphs are then replotted. Using **ZOOM** implicitly turns autoscaling off.

4.6 AUTOSCALE (AU)

Autoscales the plot size for all current unblanked curves in the graphics window and re-displays the plot.

4.7 CENTRE (CE)

Pick a point on the screen using the cursor to be the new plot centre. It affects the x/y offsets but not the scales.

4.8 MANUAL

Displays the online (HTML) version of the manual

4.9 **STOP**

Some operations, like reading a file containing many curves in to T/HIS, can take a long time. This button can be used to stop some long operations without having to exit from T/HIS.

4.10 **TIDY**

This option can be used to reset the menu layout to the default settings.

4.11 Additional Commands

A number of additional global commands exist in command line mode. These functions exist in screen menu mode within other menu levels.

- (PF) Creates a postscript plot file. Either A4 landscape or A4 portrait formats may be chosen. A title and figure number are also requested. Other plot setting may be made in the command line mode UTILITIES menu.
- (BL) Blank a currently displayed curve.
- (UB) Unblank a curve that has been blanked.
- (RM) Remove (delete) a curve. Once a curve has been removed it is lost from the system.
- (ER) Erase (delete) all existing curves from T/HIS. (Equivalent to the command RM *.)
- (GS) Global status: displays the current number of curves, their labels and whether they are blanked.
- (CO) Condense: renumbers all curves to fill any gaps in curve numbers.
- (LM) Gives the current program limits.
- **(FT)** File tracking: lists the 20 files which have been accessed most recently by T/HIS, giving details of the type of file and whether it was read from or written to.
- **(EX)** Exits (leaves) the program.

5 Main Menu

5.1	READ	Opt	10ns
5.2	WRITI	Ξ Op	otions

5.3 CURVE Manager 5.4 MODEL Manager

5.5 EDIT Options

5.6 STYLE Menu 5.7 Command File

5.8 IMAGE Options

5.9 OPERATE Options

5.10 MATHS Options 5.11 AUTOMOTIVE Options

5.12 SEISMIC Options

5.13 MACRO Options

5.14 FAST-TCF Options 5.15 TITLE/AXES Options 5.16 DISPLAY Options

5.17 SETTINGS Menu 5.18 MEASURE Menu

5.19 GROUPS Menu 5.20 GRAPHS Menu

5.21 PROPERTIES Menu

5.22 UNITS Menu

5.23 JavaScript Menu

5.24 Datum Menu

5.25 T/HIS Session Save and Retrieve

5.0 Selecting Curves

5.0.1 Input Curves

By Curve ID

A number of the menus require a range of curves to be selected. When a range of curves has to be selected a menu containing a list of the available curves will be displayed (see figure, right).

A range or curves may be selected by either

- Click on the first item and hold down the mouse key, drag the mouse to the last item in the list. All items between the first and last including the first and last are selected.
- 2. Click on the first item, hold down the SHIFT key and click on the last item in the list. All items between the first and last including the first and last are selected.

Read	Write	Curves	Models
Edit	Style	Properties	Images
Operate	Maths	Automotive	Seismic
Macros	FAST-TCF	Title/Axes	Display
Settings	Measure	Groups	Graphs
Command File	Units	JavaScript	Datum

The MAIN MENU provides access to a number of separate menus that perform most of the operations available within T/HIS from reading in data to producing postscript laser files.



VISIBLE (P)age

This option will select all of the curves that are unblanked in any graph on the current page.

Visible (Page) ► Visible on Page Visible All Pages Explain This

VISIBLE (A)II Pages

This option will select all curves that are unblanked in at least one graph.

PICK

Alternatively curves may be picked from the screen. With this option the left mouse button is used to select curves while the right button deselects curves. As each curve is selected/deselected its name and number will be reported to the user and it will be highlighted on the screen.

A range of curves can be selected interactively by dragging out an area on the screen while holding down the left mouse button.

FILTER...

This option can be used to filter the list of curves displayed by model. When this option is selected a list containing all of the current models in T/HIS is displayed and the models can be selected or deselected. Any curves that belong to a deselected model will then be filtered out of the curve list.


SHOW GROUPS

This option will display a list of the currently defined curve groups instead of curves

By Curve Group

In addition to selecting individual curves it is also possible to select curves by <u>Curve Group</u> if they have been defined.

- If a curve is defined in more than one group then it will be selected if at least one of the groups is selected.
- If more than one group containing the same curve is selected then the curve will only be counted once as an input curve.

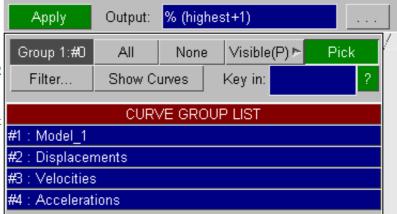

By Command Line

In command line mode a single curve may be selected by typing in a range. A valid syntax is:

A single curve number

e.g. #27

A "from":"to" range

e.g. #10:#30 (no gaps, ":" mandatory)

A compound list in "(..)"

e.g. (#1 #2 #10:#30 #3 #97)

In all contexts the order in which a group is defined does NOT influence the order in which it is processed. It is ALWAYS processed in ascending sequential order.

Thus the addition operation

```
/OP ADD (#30 #20 #10) (#1 #2 #3) #40
will produce the results
#40 = #10 + #1
#41 = #20 + #2
#42 = #30 + #3
```

5.0.2 Output Curves

All operations that generate new curves must have a target curve defined. This must be one of the following:

```
#nnn a specific curve number nnn# meaning "the lowest free curve"% meaning "the highest free curve"
```

In all cases output will start at the relevant curve number, however defined, and will rise sequentially with no gaps. This can cause an existing curve to be overwritten, or the output curve number to exceed the limit of 999. Both conditions are checked for: a warning is given if either will occur should the operation go ahead, and an opportunity given to modify or abort the pending operation.

There is a further output option that is only valid for operations where the input is a curve group:

. meaning "overwrite the input curve(s)"

In this case the input curves are overwritten without warning. For example, this option might be used to integrate a set of curves, overwriting the original results with the integrated values.

Any curve number between 1 and 999 may be used as an input or output curve. It is not necessary to use curves sequentially; gaps are permitted in curve number usage. Therefore curves #1 and #10 can be used, for example, without having to use the intervening curves #2 to #9. Likewise, deleting a curve will no longer cause those above it to be renumbered downwards to fill the gap.

5.0.3 Curve Operations

The functions available fall into four distinct groups,

1) Separate functions involving two groups of curves, where the result is of the form:

$$<$$
Rn $> = <$ G1n $> [OP] <$ G2n $>$

2) Separate functions involving only one group of curves, where the result is of the form:

$$<$$
Rn $> = [OP] <$ G1n $>$

3) Single output from only one group of curves, where the result is of the form:

$$<$$
R $> = [OP] <$ G1(1...n) $>$

4) Separate functions involving three groups of curves, where the result is of the form:

$$<$$
Rn> = $<$ G1n> [OP] $<$ G2n>[OP] $<$ G3n>

Currently the only function that has 3 curves groups as input is the VEC operation

1) Separate Functions On Two Groups

These functions display a menu in which **two** groups of curves may be selected, (see right).

You must define one or more curves in group #1, and group #2 must be:

either A group of as many curves as there are in group #1.

or A single curve. Every curve in group #1 is applied to this curve.

or A constant value, entered in the **Key in**: text box.

You can pick curves in either group from their menus, or type a range into the **Key in:** box.

NOTE: the order in which they are processed is ascending sequential, **not the order in which you define them**.



2) Separate Functions On A Single Group

These functions display a menu in which one group of curves may be selected, (see right).

Operations apply separately and uniquely to each selected curve.

As before, the order of processing is ascending sequential, not the order in which you define them.



3) Single Output From A Single Group


These functions require a single group of curves as input like the functions above. The output is a single curve.

5.1 READ Options

T/HIS can **READ** data from a number of sources including LS-DYNA binary output files, LS-DYNA ASCII files and tabulated x/y data files. In addition this menu allows data for new curves to be entered directly using the keyboard.

5.1.1 LS-DYNA


Users are strongly advised to run each LS-DYNA analysis in a separate directory. Some of the default names for the files generated by LS-DYNA that T/HIS can read are not unique and T/HIS can not tell which files belong to which model. If you do read multiple models from the same directory T/HIS will generate a warning message if you read the same file for more than 1 model.

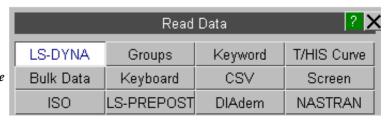

5.1.1.1 Selecting Models

There are three ways to select the LS-DYNA models that you want to read into T/HIS

- (i) Select a single model (see Section 5.1.1.1.1)
- (ii) Search directories for results and open open multiple models (see <u>Section 5.1.1.1.2</u>)
- (iii)Open a model database and select the models you want to read (see Section 5.1.1.1.3)

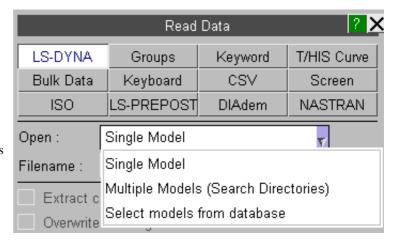


5.1.1.1.1 Select Model

Select ANY results file from a model. T/HIS will then search for all the results files in that directory produced by the same analysis as the selected file (as illustrated on the right) and display a list of all the files found. The user can then select which files to open. The default is to open all the available results files.

If you are using the Oasys Ltd. SHELL to submit jobs then the default filenames will be "jobname.thf", "jobname.xtf", "binout", "abstat" etc. If you use the standard LSTC output file names then the filenames will be "d3thdt", "xtfile", "binout", "abstat".

The T/HIS preference option "this*file_names" can be used to set the default filenames that T/HIS searches for to either the ARUP set or the LSTC names.


When the user selects **Apply** the selected file are then opened and the contents scanned. After the files have been scanned the list of available data types will automatically be displayed (see Section 5.1.1.5)

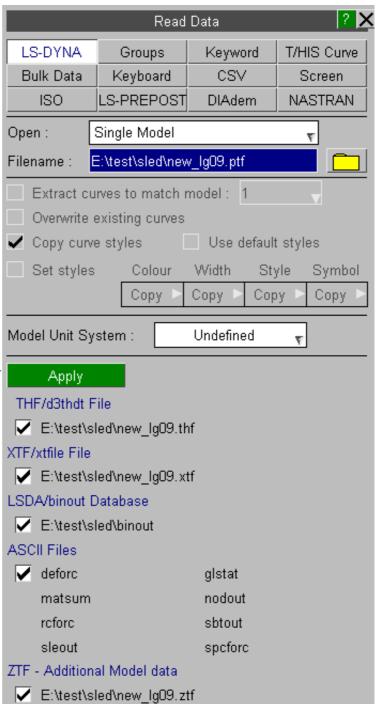

5.1.1.1.2 Search Directories Recursively


Multiple models can be opened by using the option to search directories recursively.

After a directory has been specified T/HIS will display a list of all the models it can find in the directory structure and each file can be selected. The order in which the models are read in can be specified by selecting the models in the order required. The selection buttons will display the model number that each model will be read into. The model numbering begins from the next free model number and is then sequential.

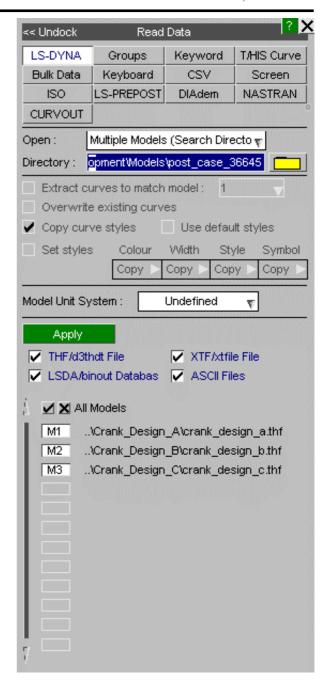

5.1.1.1.3 Select Models From Database

From version 10.0 onwards T/HIS can select models from a model database. The database file is an XML format file that contains information on where models are located along with a brief description of each model, (see <u>below</u> for more details on the file format)

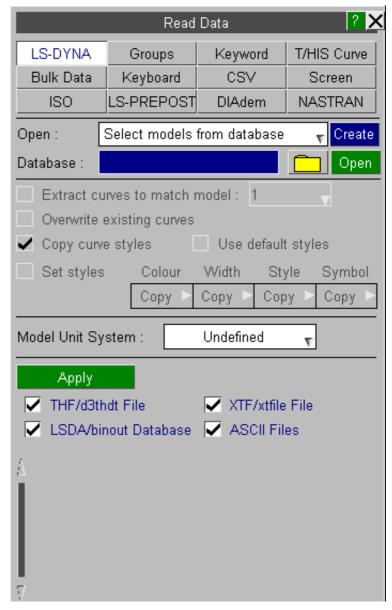

To select a model database either enter it's name in the text box or use the file selector.

The default model database can be specified as a command line argument (see section 1.3 for more details). The default database filename and location can also be specified in the preference file (see Appendix H for more details)

```
this*database_dir:
this*database file:
```

After a database file has been selected it's contents will be read and T/HIS will display a Tree Like menu showing the contents of the database.


As each item is displayed T/HIS will check to see if the files that it refers to exist.

If a file does exist then a green tick will be displayed


If a file does not exist then a red X cross will be displayed

The number of levels in the database that are automatically expanded when it is first displayed can be specified in the preference file (see <u>Appendix H</u> for more details)

this*database expand:

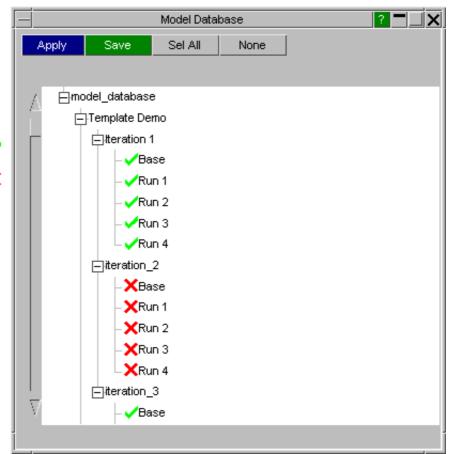

After selecting the required models use **Apply** to close the database window and return to the main menu where the selected models will be displayed along with the model numbers they will be read in as

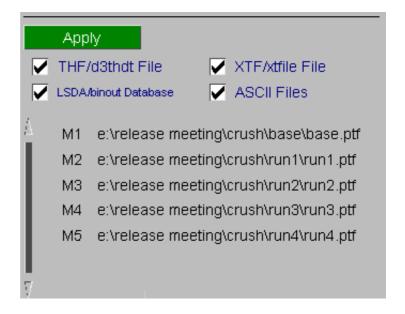


Selecting Models

Models can be selected and deselected by clicking on each row. Multiple model can be selected by clicking on the 1st model and holding down SHIFT while selecting the last model in the range.

As each model is selected the model number than it will be read in as is automatically displayed alongside the model description.

A complete branch can be selected/deselected by selecting the branch label (Iteration 1).

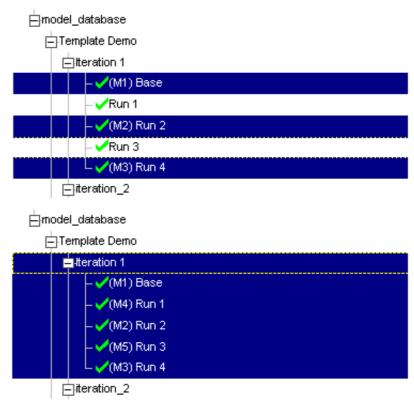

Modifying the Database

Database entries can be added, removed and modified by right clicking on a branch label or a model description

Right clicking on a branch label will display 4 options

Modify Modify the branch label. ...

Add Add a new model into the selected branch.

A menu will be displayed to select a new model and to define the model description that is displayed for the new model.

Insert a new branch within the selected branch.

Delete Delete this branch and everything within it.

model_database

Template Demo

Iteration 1

Wodify...

Add Model...

Run

Run

Run


Run

Delete

Run 4

Sel All

None

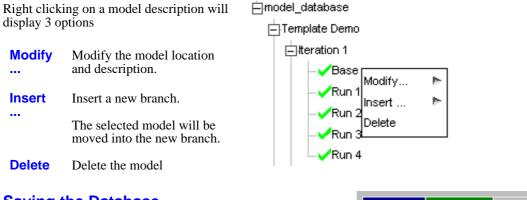

Saving the Database

After modifying the database use the **Save** option to save the changes for future sessions.



Save

Apply

Creating a new Database

If you do not have a database or if you want to create a new one then T/HIS can create the new database for you. To create a new database click the **CREATE** button and simply enter the name of the new database file in the text box that appears, T/HIS will then check that the file does not already exist and if it doesn't it will create a new empty database.

Alternatively if you type in the name of a file in the main Open Plot File window that does not exist then T/HIS will ask if you want to create a new empty database using that filename.

Once you have done this you can use the $\underline{\text{Modify}}$ options above to add items into the database and then save the file before exiting.

Database Format

The Model Database uses an ASCII XML file format.


All items with the database are either branches or models. Each database entry has an XML name and a LABEL element. Models also contain a model element that contains the full pathname of one of the files belonging to the model.

The XML name should be unique and should obey the following rules

- Names can contain letters, numbers, and other characters
- · Names must not start with a number or punctuation character
- Names must not start with the letters xml (or XML, or Xml, etc)
- Names cannot contain space

The LABEL is the string used to display an item within the tree view. Unlike the XML name the LABEL can contain any ASCII character.

```
<model database version="10.000000">
    <Template Demo label="Template Demo">
        <iteration 1 label="Iteration 1">
           <base Tabel="Base"</pre>
               model="e:\release
meeting\crush\base\base.ptf"/>
           <run 1 label="Run 1"
               model="e:\release
meeting\crush\run1\run1.ptf"/>
           <run_2 label="Run 2"
               model="e:\release
meeting\crush\run2\run2.ptf"/>
           <run 3 label="Run 3"
               model="e:\release
meeting\crush\run3\run3.ptf"/>
           <run_4 label="Run 4"
           meeting\crush\run4\run4.ptf"/>
        </iteration_1>
        model="e:\test\crush2\base\base.ptf"/>
           <run_1 label="Run 1"
model="e:\test\crush2\run1\run1.ptf"/>
           <run 2 label="Run 2"
model="e:\test\crush2\run2\run2.ptf"/>
           <run 3 label="Run 3"
model="e:\test\crush2\run3\run3.ptf"/>
           <run_4 label="Run 4"
model="e:\test\crush2\run4\run4.ptf"/>
           </iteration 2>
        </Template Demo>
</model database>
```

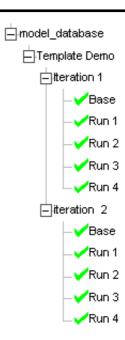


5.1.1.2 Automatic extraction of model results

When a second or subsequent model is opened in T/HIS this option can be used to automatically generate the same curves as those already read from another model.

This option can also be used if a model is re-read into T/HIS to extract the same curves as those that had already been read from the model.

By default this option will attempt to generate curves that match those already read from model 1. If results have already been read from more than one model then the model to match the curves form can be set to any of the existing models.

This option can be used to overwrite the existing curves from a model. If a model has been read into T/HIS and curves have been read from the model while the analysis was still running then this option can be used to automatically update the curves.

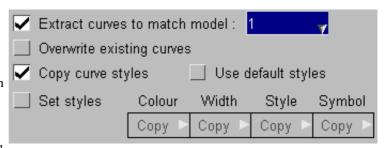

Overwrite existing curves

When the curves from the 2nd or subsequent model are automatically generated then by default they will be given the same colours, and line styles as the curves in the original model.

Instead of copying the curve styles a new style for all the automatically generated curves can be specified. This make it very easy to set the same style for all of the curves that are read from a model. Alternatively the default T/HIS curve styles can be used.

5.1.1.3 Model Unit System


This option can be used to set the default Unit System that will be applied to the model. For more information on Units see Section 5.22

5.1.1.4 Entity Types

Items are shown in bright green if they occur in all the models that have been read into T/HIS and are currently selected. If they occur in at least one model but not all models then they are shown in a duller green (in the case shown in the adjacent picture Beams and Joints can be found in some but not all of the models).





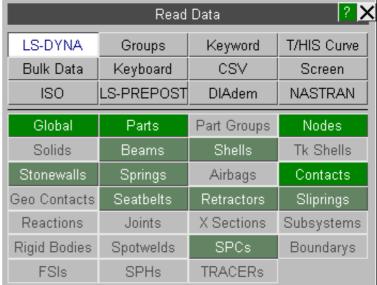

5.1.1.5 Data Components

When reading data from any of the LS-DYNA binary files or the LS-DYNA ASCII files multiple components and entities may be selected at the same time.


Each data extraction menu consists of a list of available data components and a list of entities.

Data Components

Individual data components can be selected using the mouse. If a component has been selected and a second item is subsequently selected the first item will be deselected.

Multiple components may be selected by

- Holding down the CTRL key when selecting items to add individual items to the list of selected components.
- 2. Holding down the **SHIFT** key when selecting items to add a range of items to the list of selected components.
- 3. Clicking on the first item to be selected and then dragging down the list of items without letting go of the mouse button.

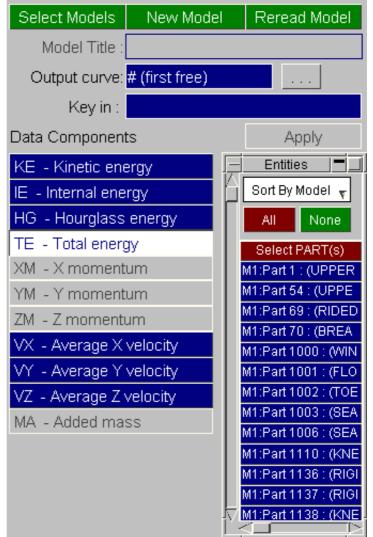

5.1.1.6 Entities

Individual entities can be selected/deselected using the mouse.

Multiple entities may be selected by


- 1. Holding down the CTRL key when selecting items to add them to the list of selected entities.
- Holding down the SHIFT key when selecting items to add a range of items to the list of selected entities.
- 3. Clicking on the first item to be selected and then dragging down the list of items without letting go of the mouse button.

Entities can be sorted in four ways:

Sort by Name

Sort by model	will list all entities in the lowest number model in order of ascending ID number, then all entities in the next-lowest model, and then move through the rest of the models in ascending order.
Sort by ID	will list all entities in ascending order showing the model ID for each entity
Common IDs	will list only the entities with IDs that are common to all models without showing the model ID's


arranges the entities in alphabetical order based on their names.

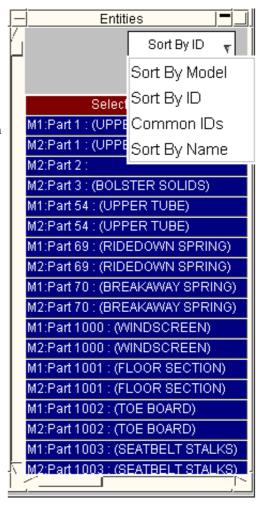

5.1.1.7 Surfaces/Integration Points

Some BEAM, SHELL, and THICKSHELL data components can be read from multiple integration points.

If a data component is available for multiple integration points then an additional **Select Surface** options is displayed.

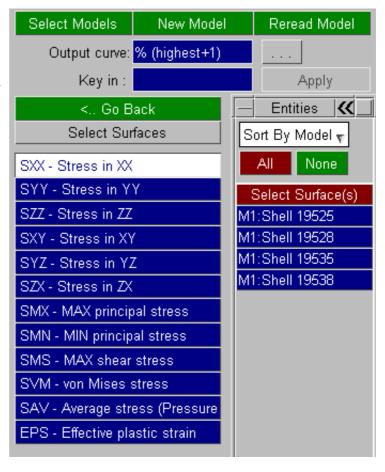

Select Surface

This option will display a separate menu listing all of the integration points that are available to read data from.


For Shell and Thick Shell elements the menu will include all of the through thickness integration points plus 3 additional options; TOP, MIDDLE and BOTTOM.

For Beam elements the menu will just display the integration points.

In plane int points

In addition to the through thickness integration points recent versions of LS-DYNA can also output data for multiple in-plane integration points for fully integrated Shell and Thick Shell elements. If T/HIS can identify that the model contains data for multiple in-plane integration points then these options can be used to select the individual in-plane integration points or to average the 4 in-plane points.

For more information on selecting integration points for beams, shells and thick shells see Sections $\underline{A.6}$, $\underline{A.7}$ and $\underline{A.8}$

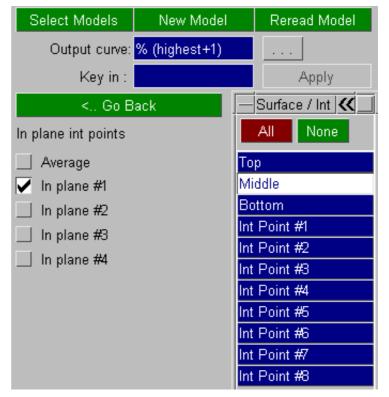

5.1.1.8 Shell and ThickShell Data Components

If Shell and ThickShell data is being read from the LDSA (binout) file then the file can contain data components in both the ELOUT and ELOUTDET branches.

By default T/HIS uses the data from ELOUTDET as ELOUT only contains a subset of the data in ELOUDET.

In some versions of LS-DYNA it is possible to change the Shell and ThickShell data components written to the ELOUT so that they are defined using the global coordinate system (see EOCS on

*CONTROL_OUTPUT) instead of the default element local coordinate system. If this option is used then only the ELOUT file is modified, the ELOUDET file is still written using the local coordinate system.

Use ELOUT instead of ELOUTDET

If T/HIS detects that the LSDA file contains both ELOUT and ELOUDET and that they are using different coordinate systems then this option can be used to force T/HIS to use the ELOUT file data components using the global coordinate system.

This option can also be set via the preference file (see <u>Appendix H</u> for more details) and via the command line (see Section <u>1.3</u>)

Global	Parts	Part Group	s Nodes			
Solids	Beams	Shells	Tk Shells			
Stonewalls	Springs	Airbags	Contacts			
Geo Contacts	Seatbelts	Retractors	Sliprings			
Reactions	Joints	X Sections	Subsystems			
Rigid Bodies	Spotwelds	SPCs	Boundarys			
FSIs	SPHs	Tracers	Pulleys			
Select Mode	ls New I	Model	Reread Model			
Output c	urve: % (highes	t+1)				
Key in : Apply						
STRESS Tensor components PLASTIC STRAIN STRAIN Tensor components FORCE/MOMENT components MISCELLANEOUS components EXTRA components						
✓ Use ELOUT instead of ELOUTDET The LSDA (binout) file contains ELOUT and ELOUTDET data. The ELOUT file uses the Global coordinate system for						
Shell and ThickShell results while ELOUTDET is using a Local coordinate system.						

5.1.2 **GROUPS**

This option can be used to read a file containing PART group definitions. If a model is read in which contains PART information then the PART groups can be used to read in and sum energies for a group of PARTS in one go.

The 1st time T/HIS finds a group file (groupXXX.asc) in a directory it will automatically read the file and create the PART groups.

After reading the 1st group file T/HIS will by default ignore any other group files it finds in directories when it opens a model.

This option can be changed as follows.

Ignore This option (the default) will

make T/HIS ignore any more

group files it finds

Delete If T/HIS finds a group file

when a new model is read in then all existing group definitions will be deleted before the new file is read

Overwrite If T/HIS finds a group file

when a new model is read in then all the new group definitions will be added to the existing ones. If the new file contains a group with the same ID as an existing group then the

old definition will be

overwritten.

Increment If T/HIS finds a group file

when a new model is read in then all the new group definitions will be added to the existing ones but the group ID's will be incremented to ensure that they do not clash with


existing ones.

The default option can be changed using the preference option

this*read group files:

(see Appendix H for more details)


If the option to read groups files is set and the directory contains more than one group file then T/HIS will use the newest file.

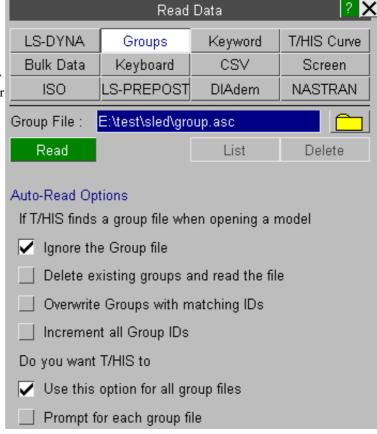

5.1.3 **T/HIS Curve**

This option can be used to read in curves stored in T/HIS curve file format (see <u>Appendix B</u> for more details)

By default this option can be used to select a single file. After selecting the file it will automatically be opened and read and all of the curves in the file will be read in.

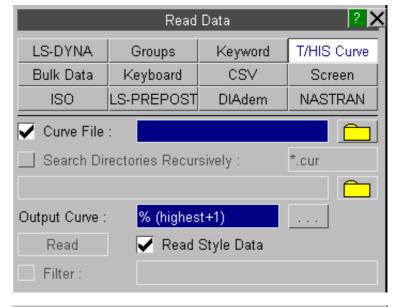

In addition to reading a single file this option can also be used to search directories recursively for multiple files.


After the search has finished a list showing all of the files that have been found will be displayed so that multiple files can be selected and read in one operation.

By default T/HIS will search for files with the file extension .cur, this can be changed if required.

In addition to changing the default file extension the list of files can also be filtered. The filter string can contain the following wildcards

- * matches multiple characters
- ? matches a single character

Note: The filtering ignores case.

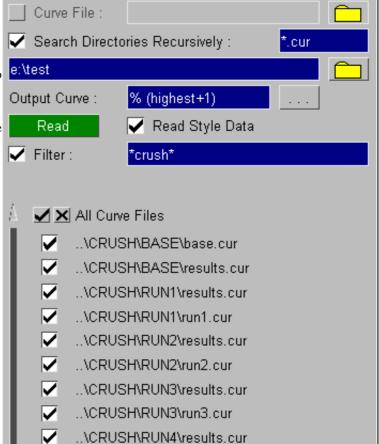

5.1.4 KEYWORD

Read data into T/HIS from an LS-DYNA KEYWORD input file. All X,/Y data defined using *DEFINE CURVE will be read in from the specified input file. Any X and Y axis scaling or offsets defined within the *DEFINE CURVE definition will be applied to the X,Y as it is read in. If the TITLE option has been used the the title will be used as the curve label otherwise the curve ID number will be used.

From version 9.3 onwards this option will also process any files specified using the *INCLUDE option.


/re kw "filename" "filename"


read all curves from KEYWORD input file

5.1.5 **BULK**

Read data into T/HIS from a Bulk Data file. The format of a Bulk Data file is described in Appendix C.

/re bd read all curves from Bulk Data file "filename" "filename"

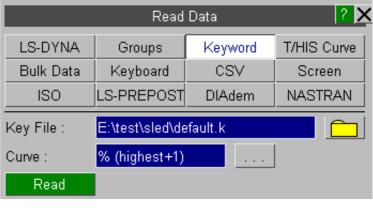

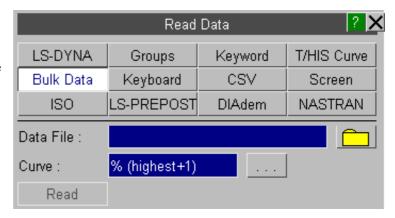

5.1.6 **KEYBOARD**

Key in curve information directly. A dialogue window is displayed upon requesting this option where the user will be prompted for title, x and y axis labels, a curve identifier and then a series of points. Once all the points required have been entered carriage return should be pressed. The user will then be prompted for the curve or file in which to store this data: # means use the next free curve.


5.1.7 **CSV**

The CSV menu (see right) can be used to read comma separated variable file(s) into T/HIS. This menu allows to read single csv file or all the csv files in a selected directory both recursively and non-recursively.


Each file may contain up to 1000 columns of data (separated by commas).

The maximum line length supported by this option is 10240 characters.


CSV files written from the D3PLOT Write Menu are automatically detected by T/HIS and sets the appropriate read options. The options can be changed, but the data may not read in as expected. Both the Write->Entity and Write->Scan formats are supported. The first column of data containing the entity IDs is ignored for both formats. For files written from the Write->Scan menu the third column is ignored as this also contains entity IDs.

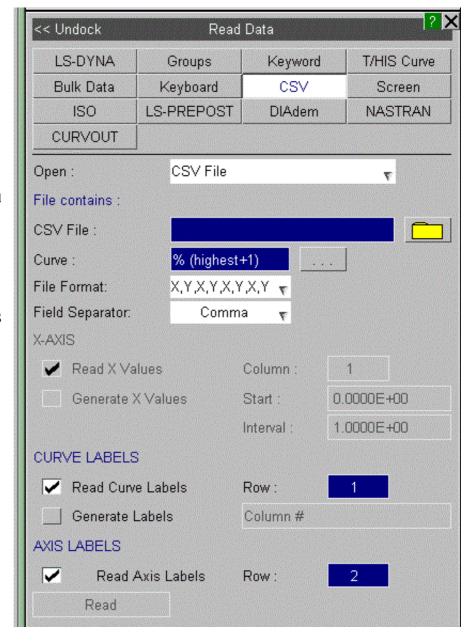


The CSV menu can also read in multiple CSV files in a given directory and also all the sub-directories recursively by changing the *Open* option from *CSV File* to either *CSV Directory* or *CSV Directory* (*Recursive*).

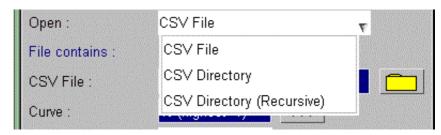

For both *CSV Directory* and *CSV Directory* (*Recursive*) options, CSV menu first scans through the directory and specifies the number files it has found. By default all the files found will be selected. Users can filter out the files they want to read by clicking on the *Select* button.

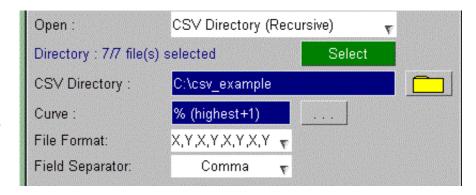

On clicking the *Select* button, CSV menu will display the list of all the CSV files found in the specified directory. Users can select which CSV files they would like to read in.

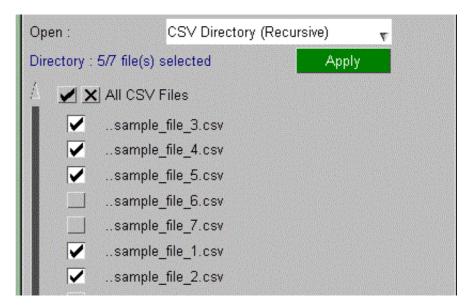

File Format

This option can be used to change the CSV file format between the X,Y,X,Y,X,Y format where alternate columns are the X and Y values for each curve and the X,Y,Y,Y format where there is a single column containing the x-axis values for all the curves.

Field Separator

By default T/HIS assumes that the columns of data are separated by commas, this option can be used to change the field separator to either a Tab or Spaces.

If the 'Space' option is used then multiple spaces are counted as a single field separator. If curve or axis labels are defined in the file and they contain spaces then they need to be enclosed in pairs of " quotes.

The default field separator can specified in the preference file (see <u>Appendix H</u> for more details)

this*csv_separator:

Read X Values

This option can be used to specify a column within the file that contains the X-axis data values that should be used for all of the other columns of data.

Generate X Values

This option can be used to automatically generate the X-axis values if none of the columns within the file contain the data.

Read Labels

This option can be used to specify a row within the file that contains labels for each of the columns of data that can be used as the curve labels within T/HIS.

Generate Labels


This option can be used to automatically generate labels for each set of data. A single string can be specified which will then have the column number appended to it to generate unique labels.

Read Axis Labels

This option can be used to specify a row within the file that contains the axis labels.

5.1.8 **SCREEN**

The **SCREEN** menu (see right) can be used to interactively create a curve T/HIS by selecting points using the mouse.

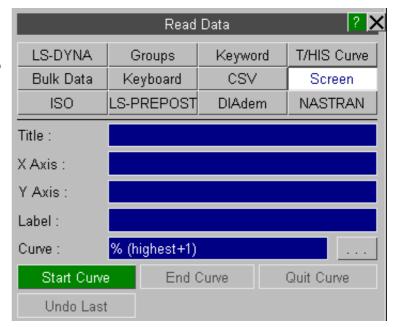

Start CurveThis option will start point selection process. Once you have started creating a curve all the other T/HIS menus will be disabled until you end the point selection using

either the **End Curve** or **Quit Curve** options.

Dynamic viewing will still be available.

End Curve This option will end the current curve creation and save the curve.

Quit Curve This option will end the current curve creation without saving the curve.

Undo Last This option can be used delete the last point created (the middle mouse button will


also delete the last point).

5.1.9 ISO


This option can be used to read in curves from files written using the ISO/TS 13499:2003 file format.

The default option in T/HIS is to read in an Index file containing information on multiple channels. After the file has been opened and read a list of all the available channels will be displayed so the required channels can be selected.

When listing the channels the default is to display the filenames for each of the channel files. Alternatively the channel names (read from the Index) file can be displayed.

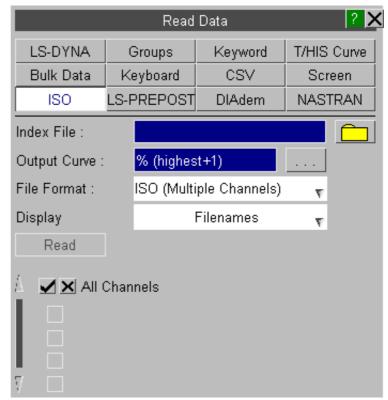

Instead of reading an Index file and then selecting which channels to read individual channel file can be read in directly.

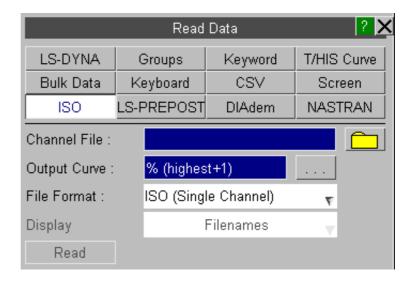


5.1.10 **LS-PREPOST**

This option can be used to read in curves from files written out from LS-PREPOST.

Two different file formats are supported

LS-PREPOST Curve Files

LS-PREPOST XY Pairs

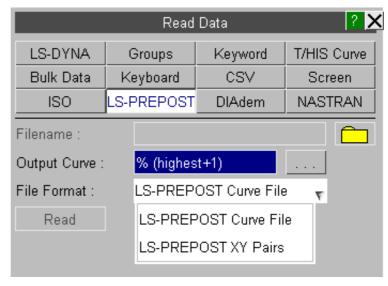


5.1.11 **DIAdem**

This option can be used to read in data from DIAdem format data files. After selecting a DIAdem header file a list of all the available channels will be displayed so the required channels can be selected.

Version 11.0 of T/HIS supports the following DIAdem data file formats

REAL32
REAL48
REAL64
INT16
INT32
WORD8
WORD32
ASCII
The MSREAL32, TWOC12 and TWOC16 are not supported.

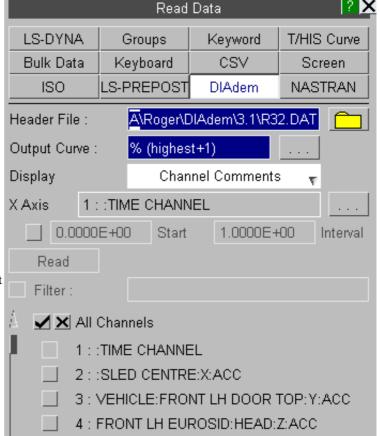

By default T/HIS will display the channel comments (header block 201) for each channel. This can be changed to the channel names (header block 200) using the popup menu if required.

When channels are read in this option is also used to create the labels for each curve.



As well as displaying either the channel comments or the channels names the list of channels can also be filtered if required .

The filter string can contain the following wildcards

* matches multiple characters? matches a single character

Note: The filtering ignores case.



Normally one of the DIAdem data channels contains the x-axis (time) values. By default T/HIS assumes this is channel 1 but this can be changed using the button labelled ...



If none of the channels contain the x-axis values then a start value and an increment can be specified to generate curves with evenly spaced x-axis values.


5.1.11.1 Supported DIAdem header file blocks

The following DIAdem header file data blocks are supported. All other data blocks are ignored.

GLOBAL HEADER	
111	Value for NoValues in the data file
112	Interchange high- and low-bytes
CHANNEL HEADER	
200	Channel name
201	Channel comment
210	Channel type
211	File from which channel data is read
213	Method of storing the data
214	Data type
220	No. of values in the channel
221	Pointer to the 1st value in the channel
222	Offset for ASCII block files
	Offset for binary block files with header
223	Local ASCII-pointer in the case of ASCII block files
230	Separator character for ASCII-block files
231	Decimal character in ASCII-files
232	Exponential character in ASCII-files
240	Exponential character in ASCII-files
241	Step width / Factor
252	Keyword for NoValues in the channel
254	Value for NoValues in the channel

5.1.12 NASTRAN

This option can be used to read in data from from NASTRAN PCH files.

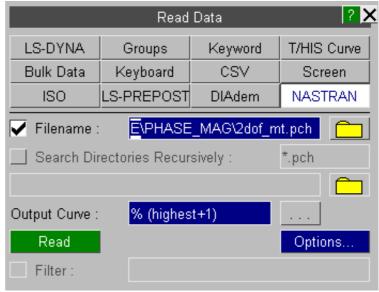


Currently the following types and data components are supported along with the SORT1, SORT2 and XYPUNCH file formats

Nodal	Displacements
Nodal	Velocities
	Accelerations
	SPC Forces
	Element Forces
CDAMP	Element Forces
CELEM	Element Forces
	Element Forces
CQUAD	Element Forces
CTRI	Element Forces

By default T/HIS will read in every curve that is finds in the file so if you read in a file containing nodal displacements from a SORT2 format file you will end up with 12 curves being produced in T/HIS for each node.

- X,Y,Z translation (Real) / (Magnitude)
- X,Y,Z translation (Imaginary) / (Phase angle)
- X,Y,Z rotational (Real) / (Magnitude)
- X,Y,Z rotational (Imaginary) / (Phase angle)

The **Options...** button will display the following menu that will allow some components to be deselected before reading the file.

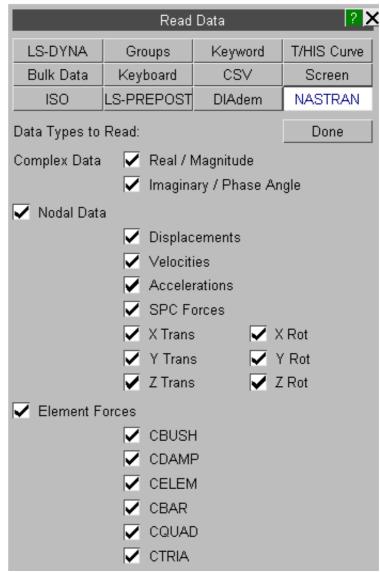

Complex Data

For complex data components written out as a pair of real and imaginary numbers or as a magnitude and phase angle either of the components can be deselected.


Nodal Data

For nodal data any of the 4 data types can be deselected along with any of the 6 translational/rotational directions.

Element Forces

For element forces each individual element type can be deselected.


T/HIS will automatically create curve labels for each curve generated from the PCH file. The entity types, ID's and components will also be stored with the curves to allow the curves to be sorted using the curve table (see Section 5.3.4)

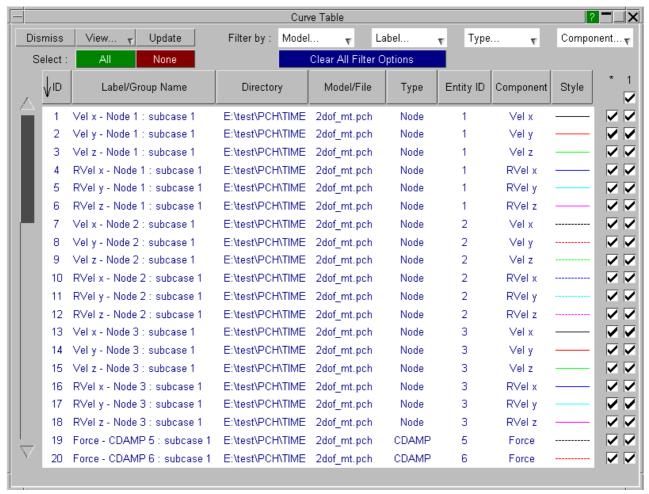

5.1.13 **CURVOUT**


This option can be used to read in data from from a CURVOUT ASCII file (curves defined by *DEFINE_CURVE_FUNCTION).

All the curves defined in the file are read. However, CURVOUT data (from both ASCII and binout files) can now be read in via the LS-DYNA option in the read panel. The curves in the file will then be treated as entities, allowing them to be selected individually in the entities list.

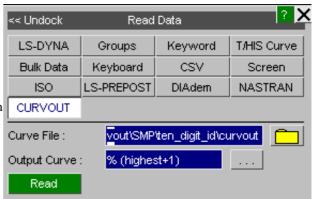

5.2 WRITE Options

Writes a group of curves out to a file for later use or to the screen.

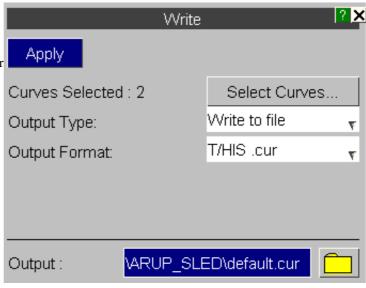


5.2.1 WRITE TO FILE

Writes a group of curves out to a file for later use if required. The user is prompted for the list of curves to write out after a filename has been specified.

Output Type:

5.2.1.1 FILE FORMAT

Writes a group of curves out to a file for later use if required. The user is prompted for the list of curves to write out after a filename has been specified.

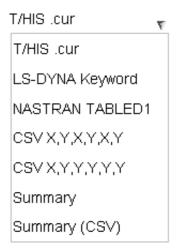

Write to file

T/HIS .cur format

This option will write out curves using the default T/HIS curve format. One curve file will be written containing all the selected curves along with their Titles, Axis Labels, Line Labels and styles. From version 9.4 onwards the curve file can also contain information on the UNIT system and the X and Y axis units for each curve (see Appendix B for more details on the curve file format)

LS-DYNA Keyword

One file will be written containing all the selected curves using the LS-DYNA *DEFINE_CURVE format so that the file is suitable for inclusion in a LS-DYNA keyword file.

NASTRAN D1

This option will write out curves using the NASTRAN TABLE D1 format. Curves are listed sequentially in the file.


CSV X.Y.X.Y.X.Y

This option will write out curves using as a CSV (comma separated variable) file that can be read into other programs like Microsoft EXCEL. The columns written are x-values for the 1st selected curve, y-values for the 1st selected curve, x-values for the 2nd selected curve

•••



This option also writes out a CSV file. All the curves are output using a single consistent set of X values that can either be taken from one of the curves or they can be generated automatically.

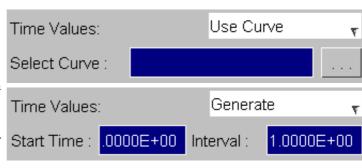

Summary

Gives a summary of the curve. This includes the type of data being plotted and the maximum and minimum values in the curve.

Summary (CSV)

CSV (comma separated variable) vesrion of the summary file.

From version 9.4 onwards the CSV files generated by T/HIS can also contain information on the UNIT system and the X and Y axis units for each curve. If you don't want to output this information then you can turn it off.

Output Format: CSV (X,Y,X,Y,X,Y)

Write UNIT information to CSV file

The default setting for this option can be set via the preference option

this*write_csv_units:

This option can also be turned on and off in FAST-TCF scripts (see section 7.XX)

5.2.2 WRITE TO SCREEN

Output Type:

Write to screen

Writes data to a text window on the screen.

5.2.2.1 OUTPUT FORMAT

List Summary Scan

LIST

This option will write out all the points in the selected curves.

Summary

Gives a summary of the curve. This includes the type of data being plotted and the maximum and minimum values in the curve.

SCAN


Scans a group of curves and reports the maxima and minima values for each individual curve along with the overall maxima and minima

5.3 Curve Manager

In screen menu mode curves are managed using the **CURVE MANAGER** window, shown in the figure (right).

By default the **CURVE MANAGER** menu only displays 1000 curves. An unlimited amount of curves can be used and these are displayed in the menu in blocks of 1000. If an attempt is made to use a curve higher than 1000 then the Range options are used to select which group of 1000 curves you wish to display.

Against each curve that currently contains information is a curve number button. The colour of this button indicates the current blanking status of a curve




The blanking status of each curve can be changed by clicking on this button. The <u>Curve Table</u> can also be used to change the blanking status of a curve.

A range of curves may either be blanked or unblanked by selecting the first button in the range and then holding down the **SHIFT** key while selecting the last button in the range. All buttons that lie between the first and last buttons selected will have their status changed to match that of the first button that was selected.


The line label for each curve may be changed by over-typing the label currently displayed in the line label box.

The button located between the curve number button and the curve label shows the current colour, line style and symbol that will be used to plot the curve. These properties can be modified by clicking on this button to display the line style menu, see Section 5.6.

The **CURVE CONTROL** window can also be accessed via the **File....Curves** option at the top of the graphics window or from the **Curves** button in the main menu.

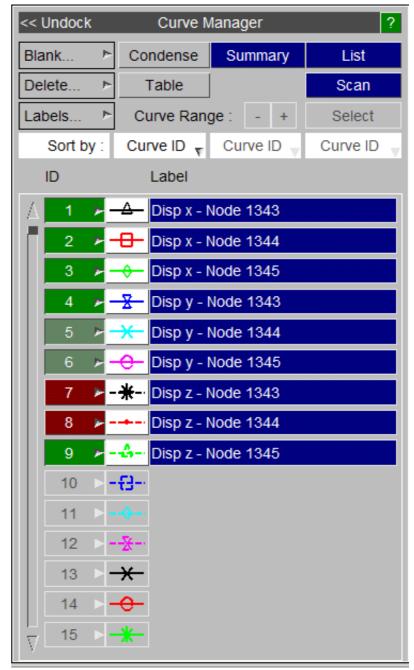


If the curve labels are too long to be seen in the standard Curve Manager menu then the menu can be turned into a floating menu by selecting the <<<Undock option in the menu header. After undocking the menu it can be re-docked by selecting>>>Dock.

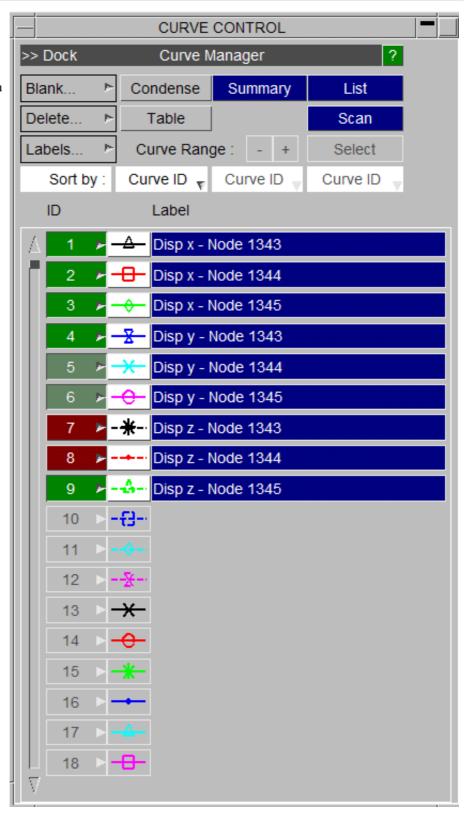

5.3.1 Reordering Curves

Attached to each of the curve number buttons is a popup menu that can be used to reorder curves by copying and moving them. This menu is accessed by clicking the right mouse button over the curve number buttons.



INSERT CURVE BEFORE

Inserts the last curve copies to a scratch definition before the selected curve.

Inserts the last curve copies to a scratch definition after the selected curve.

COPY CURVE

Copies the curve to a scratch definition.

COPY CURVE + STYLE

Copies the curve along with is line style settings to a scratch definition.

MOVE CURVE

Copies the curve to a scratch definition and then deletes the original curve

MOVE CURVE + STYLE

Copies the curve along with is line style settings to a scratch definition and then deletes the original curve

DELETE CURVE

Deletes the selected curve

Block Moving/Copying Curves

In version 16, there's now the option to move or copy a selection of curves and inserting them before/after a given curve.

This can be done via selecting the first curve as per usual and then either:

- SHIFT + "Move/Copy Curve" To select a block of curves
- CTRL + "Move/Copy Curve" To add an additional curve to your previous selection


At any time, the operation can be canelled by right clicking a curve which is in it's "pending" status (greyed out), and selecting either Cancel Move/Copy to cancel the curve selected or via Cancel Move/Copy - All which cancels all "pending" curves.

The order in which the curves are inserted is the same order in which they are currently in the list. For example, the image on the right has curves 3,6 and 8 as pending. When these are inserted they will be condensed so that they are next to one another. So, if this selection was inserted after curve 9, then these three curves will occupy slots 10,11 and 12 respectively.





5.3.2 Blank...

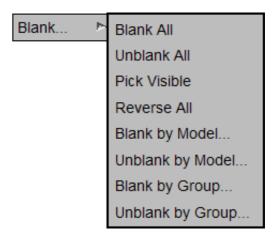

Blank All Unblank All Blank all curves
Unblank all curves

Pick Visible

Reverse All

Reverse the blanking status of all curves

Blank by Model...


Blank curves belonging to a Model

Unblank by Model...

Unblank curves belonging to a Model

Blank by Group... Blank curves by Curve Group
Unblank by Group... Unblank curves by Curve Group

5.3.3 **Delete...**

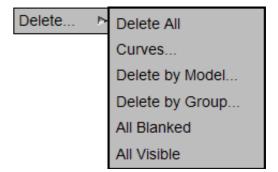

Delete All Select a groups of curves for deletion

Curves... Deletes all current curves. You are prompted for confirmation first!

Delete by Model... Delete curves belonging to a Model


Delete by Group... Delete curves by Curve Group

All Blanked Delete all the curves that are currently blanked

All Visible Delete all the curves that are currently unblanked

5.3.4 **Table**

The Table option can be used to give more control over which curves are blanked and unblanked in all of the currently defined graphs, as well as display curve properties and injury values in a tabulated format. By default the Curve Table displays a scrolling list of all of the currently defined curves and curve groups along with a set of tick boxes that display the status of the curve in the current graphs. Curves are displayed in BLUE text while curve groups are displayed in GREEN.

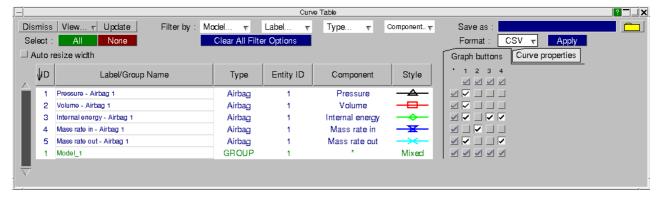

For each curve the following information is displayed by default.

ID	Curve ID or Group ID for curve groups
Label	Curve Label or Group Name

Directory	If the curve has been read in from a model then this will be the directory that all all the model files are in, if the curve had been read in from a file (.curcsv) then this will be the file location.
	No information is displayed for curve groups.
Model/File	If the curve has been read in from a model then by default this will be the ID of the model. If the curve had been read in from a file then this will be the filename.
	No information is displayed for curve groups.
Type	The entity type that the curve was generated from. If the curve was read in from a file then this will display "FILE".
Entity ID	ID of the item that the data was read from. If the curve was read from a file then this will be the index within the file for each curve.
	If the row represents more than one curve (e.g. curve groups) and the curves have different components then it will display '*'
Component	Data component name.
	If the row represents more than one curve (e.g. curve groups) and the curves have different components then it will display '*'
Style	This will show the line colour, style and width used to display the curve.

The column widths of any of the above columns can be adjusted by clicking on the bars between the header columns and the order of the columns can be changed by dragging the column headers.

The contents of the table can also be sorted by any column by clicking on the relevant header button. Clicking on the same header a 2nd time reverses the sort order for the column.

5.3.4.1 Adding / Removing Curves from graphs

To add an individual curve (or curve group) to a graph the tick boxes on the right hand side of the curve table can be used.

The first column of tick boxes (under the *) can be used to add/remove a curve from all the currently defined graphs, while the top row of tick boxes can be used to add/remove all the currently defined curves from a graph.


- If all of the curves are unblanked in a graph then the tick box will display a black tick in a white box.
- If some of the curves are unblanked in a graph then the tick box will display a dark grey tick in a grey box.
- If none of the curves in a group are unblanked in a graph then the tick box will be empty.

Multiple tick boxes can be set/unset by clicking on the first 1 and then using pressing shift which clicking on the last one.




Individual curves can also be selected by clicking on them in the main part of the curve table. Multiple curves can be selected using either CTRL to select a single curve or SHIFT to select a range of curves. As curves are selected they are highlighted in blue and the tick boxes for any unselected curves are greyed out.

When multiple curves have been selected then clicking on a tick box sets the status for all the selected curves.

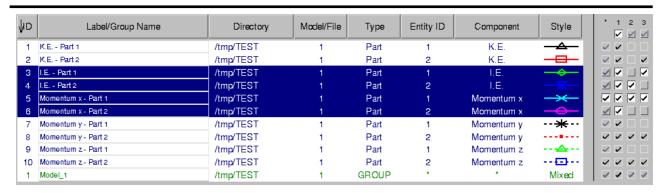


As well as blanking and unblanking curves in graphs a number of other options can be applied to selected curves by right clicking on them, such as applying operations and changing the line style.

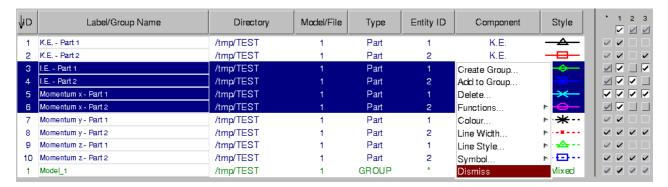

5.3.4.2 View Options

The viewing options popup, found in the top left of the curve table window, can be used to control which columns of data are displayed and what items are displayed in the curve table.

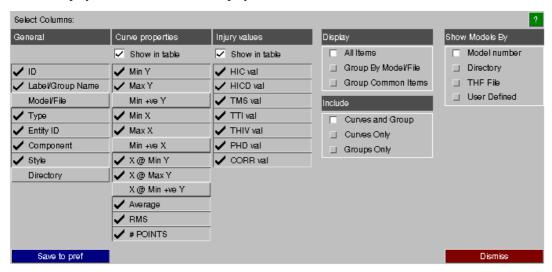

By default all 8 columns of general information about each curve will be displayed, each column can be turned on and off but T/HIS will ensure that at least one column is always displayed. Curve properties and injury values can also be displayed, but this will be discussed further in Section 5.3.4.4.

The columns that are initially displayed can be specified in the preference file (see Appendix H for more details). If the columns are changed then Save to Pref can be used to update the preference file.

Display

This option can be used to control how items are displayed in the curve table.



All Items

By default the curve table will contain one row for each curve and one row for each curve group.

K.E Whole Model	E:\BASE	1	Model	1	K.E.	
I.E Whole Model	E:\BASE	1	Model	1	I.E.	
K.E Whole Model	E:\RUN1	2	Model	1	K.E.	
I.E Whole Model	E:\RUN1	2	Model	1	I.E.	
		4	Nodo	10000	Dion mo	
Disp mag - Node 100	E. WASE	- 1	Node	10000	Disb ilia	
Disp mag - Node 100	E:\RUN1	2	Node	10000	Disp ma	
Model_1	N/A	N/A	GROUP	*	*	Mixed
Model_2	N/A	N/A	GROUP	*	*	Mixed
	I.E Whole Model K.E Whole Model I.E Whole Model Disp mag - Node 100 Disp mag - Node 100 Model_1	I.E Whole Model E:\BASE K.E Whole Model E:\RUN1 I.E Whole Model E:\RUN1 Disp mag - Node 100 E:\BASE Disp mag - Node 100 E:\RUN1 Model_1 N/A	I.E Whole Model E:\BASE 1 K.E Whole Model E:\RUN1 2 I.E Whole Model E:\RUN1 2 Disp mag - Node 100 E:\BASE 1 Disp mag - Node 100 E:\RUN1 2 Model_1 N/A N/A	I.E VVhole Model E:VBASE 1 Model K.E VVhole Model E:VRUN1 2 Model I.E VVhole Model E:VRUN1 2 Model Disp mag - Node 100 E:VBASE 1 Node Disp mag - Node 100 E:VRUN1 2 Node Model_1 N/A N/A GROUP	I.E Whole Model E:VBASE 1 Model 1 K.E Whole Model E:VBUN1 2 Model 1 I.E Whole Model E:VBUN1 2 Model 1 Disp mag - Node 100 E:VBASE 1 Node 10000 Disp mag - Node 100 E:VRUN1 2 Node 10000 Model_1 N/A N/A GROUP *	I.E VVhole Model E:VBASE 1 Model 1 I.E. K.E VVhole Model E:VRUN1 2 Model 1 K.E. I.E VVhole Model E:VRUN1 2 Model 1 I.E. Disp mag - Node 100 E:VBASE 1 Node 10000 Disp ma Disp mag - Node 100 E:VRUN1 2 Node 10000 Disp ma Model_1 N/A N/A GROUP * *

Group By Model/File

This option will display a single row for all the curves that were read from the same model or file.

When this option is selected the columns for curve ID, Label, Type, Entity ID and component display a '*' as they represent multiple values.

This option can be used to quickly assign all of the curves from a single model or file to the same graph.

*	*	E:\BASE	1	*	*	*	Mixed
*	*	E:\RUN1	2	*	*	*	Mixed
1	Model_1	N/A	N/A	GROUP	*	*	Mixed
2	Model_2	N/A	N/A	GROUP	*	*	Mixed

Group By Common Items

This option will display a single row for all the curves that were created using the same entity type, ID and component.


In the example opposite the 1st row represents all of the curves that contain a model Kinetic Energy while the 3rd row represents all the curves that contain a displacement magnitude for Node 10000.

This option can be used to quickly assign all of the curves for the same entity and component to the same graph when comparing results from multiple models.

*	*	*	*	Model	1	K.E.	Mixed
*	*	*	*	Model	1	I.E.	Mixed
*	*	*	*	Node	10000	Disp ma	Mixed
1	Model_1	N/A	N/A	GROUP	*	*	Mixed
2	Model_2	N/A	N/A	GROUP	*	*	Mixed

Include


By default the curve table contains both curves and curve groups. This option can be used to display either just the curves only or just the curve groups.



Show Models By

If the column displaying the model ID is displayed in the curve table then by default it will display the model number.

This option can be used to display either.



The model ID	1	K.E Whole Model	E:/test/ICRUSH/BASE	1	Model	1	K.E.	
	2	I.E Whole Model	E:\test\CRUSH\BASE	1	Model	1	I.E.	
The model	1	K.E Whole Model	E:/test/ICRUSH/BASE	VBASE	Model	1	K.E.	
directory	2	I.E Whole Model	E:\test\CRUSH\BASE	VBASE	Model	1	I.E.	
The name of the	1	K.E Whole Model	E:\test\CRUSH\BASE	base	Model	1	K.E.	
THF file	2	I.E Whole Model	E:\test\CRUSH\BASE	base	Model	1	I.E.	
A user defined	1	K.E Whole Model	E:\test\CRUSH\BASE	M1	Model	1	K.E.	
model description	2	I.E Whole Model	E:\test\CRUSH\BASE	M1	Model	1	I.E.	

5.3.4.3 Filter Options



The filter options can be used to filter the list of curves displayed in the curve table.

Multiple filters can be active at the same time

Filter By Model

This option can be used to filter the list of curves by model number. If curves have been read in from a file then an "Other" option will be shown.

In the example opposite only curves that are either from model 1 or model 2 will be displayed.



Filter By Label

This option can be used to filter the list of curves by label. Up to 5 different strings can be entered and the list of curves displayed will be filtered using those strings. If multiple strings are entered then the strings can either be combined using either "AND" or "OR".

A separate option can be used to ignore the case so that "model" will match both "Model" and "model"

In the example opposite only curves that contain either the word "Model" OR the word "Node" in their labels will be displayed.

Filter By Type

This option can be used to filter the list of curves by entity type. The list of entity types displayed will automatically update to show the entity types for all the curves that are currently stored in T/HIS.

In the example opposite only curves that contain "Model" data are displayed.

Filter By Component

This option can be used to filter the list of curves by component type. The list of components displayed will automatically update to show the components for all the curves that are currently stored in T/HIS.

In the example opposite only curves that are either Model Kinetic Energy or Nodal Displacement Magnitudes are displayed.









Include

By default the curve table contains both curves and curve groups. This option can be used to display either just the curves only or just the curve groups.



5.3.4.4 Curve Properties

The properties of each curve and any calculated injury values can also be displayed in the curve table. These are displayed by selecting the 'Curve Properties' tab above the graph tickboxes. The curve table, including the values in all the displayed columns (except the style column), can be written out to either a .csv or .xlsx file.

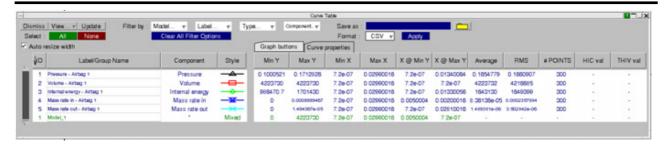


The curve properties and injury values columns that are displayed can be customized in the 'View...' popup, both individually by clicking their name in the popup and as a group using the 'Show in table' tickboxes. The choice of displayed columns can be saved to preferences.



5.3.4.5 Annotating Curves

Curves can be annotated with most of the properties and injury values by right-clicking the values in the table and selecting 'Annotate'. Options for customizing these annotations can be found in the 'Annotation options' popup. The options include the format of the displayed value, i.e. whether it should appear as a single value (usually either an X or Y value depending on the property), or as a point (X,Y). The choice to highlight the value on the curve with a cross is also given, as well as the ability to add either an automatic or user-defined label to the annotation.

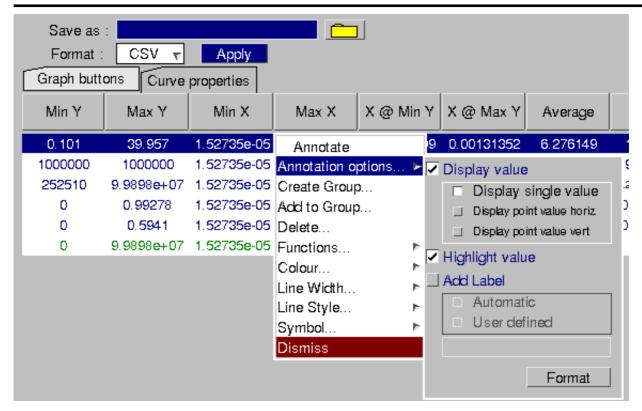

5.3.5 Summary

Displays a window from which a group of curves may be chosen. The maximum and minimum values of the selected curves are then displayed.

5.3.6 List

Displays a **LIST CURVES** window, from which a number of curves may be selected. The data point values for the selected curves are then listed in a listing box.

5.3.7 **Scan**


Displays a window from which a group of curves may be chosen. The maximum and minimum values of the selected curves are then displayed.

5.3.8 CURVE RANGE SELECTION

The range buttons in the Curve Control menu can be used to when you are working with more than 1000 curves to move between groups of 1000 curves. Pressing the green + tab will display the next group of 1000 curves in the menu, whilst pressing the red - tab will display the previous group of 1000 curves.

Alternatively pressing the Select button will bring up the following new window.

Select the appropriate group of 1000 curves and press apply to display those 1000 curves in the Curve control menu.

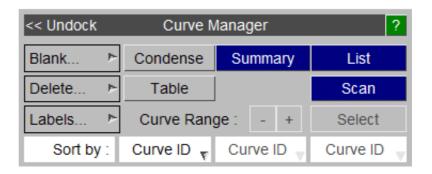




5.3.10 CURVE TAGS

Curves can be given tags to act as internal identifiers within T/HIS which can be used to reference curves in order to perform operations on them.

In order to display the curve tags, toggle on the Show Labels arrow and select Show Tags. The tag names can be defined in the input boxes.

When a curve file is written, T/HIS will save the tags of all the tagged curves in the file.

When performing operations in the dialogue box, curves can be referenced by their tags. The tag must be placed in double quotes.

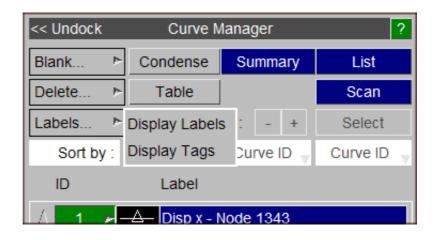


Operate > dif "Vel_x_n_123" #2050 (Written [Analysis Velocity (Dif)] to curve #2050) (DIF #1002 => #2050)

5.4 Model Manager

5.4.1 **Select**


This allows the user to turn models on/off. Deselecting a model will result in removal of its entities as options when reading data. Models can be displayed according to their titles or alternatively by the directories they were read in from.

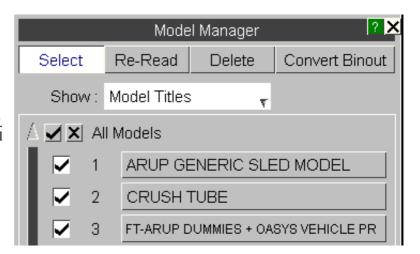

Clicking on the button displaying a model title will produce a menu similar to that illustrated. The number of each type of item in the model and the sources T/HIS found for that item type's data will be shown. The user can select which file type is preferred for the data for each type of item (see Settings).


Prefix

This menu can also be used to define a user defined model prefix. This prefix can be added automatically to the start of curve labels to help identify which model they belong to.

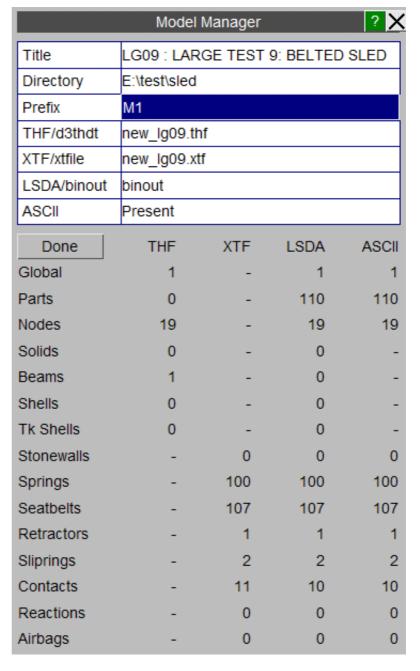


5.4.2 **Re-Read**

The re-read option can be used to rescan and update the model. This will find any new data written to disk since the file was last read.

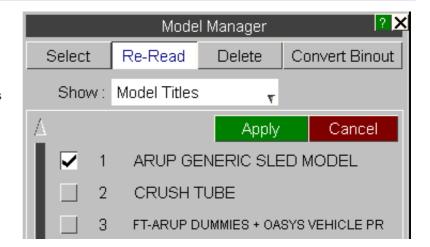

5.4.3 Delete

This option allows the user to select and delete models from T/HIS. Any curves that have been read in from a model that is deleted are NOT deleted with the model. Any number of models to be deleted from T/HIS.

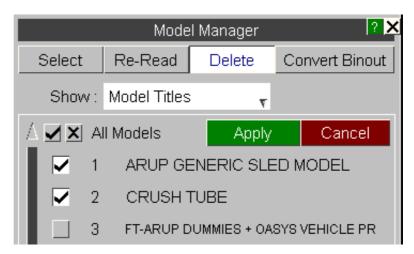


5.4.4 Convert Binout

This option can be used to convert LSDA binout files into the older ASCII files. The menu allows a number of models to be selected.

The **Select Files** button allows the user to specify which ASCII files are to be created.

All of the ASCII files are written into the directory containing the LSDA file.

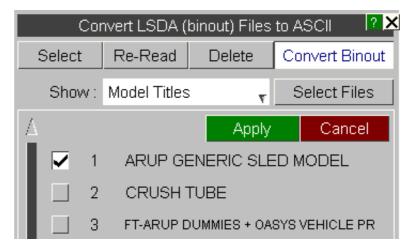

5.5 EDIT Options

This menu allows you to examine and make modifications to the curve data points. You are always working on a "scratch" copy of the curve. The permanent curve is only updated when you SAVE it explicitly.

Moving around the curve data is done through the use of scroll bars on the data panel.

Save

Saves the edited curve as either a new curve or overwrites the original.

Restart

Resets the curve being edited to the values at the start of the edit session.

Quit

Quits the curve editor without making any changes to the curve

Labels...

Allows the title, axis and line label to be changed (see <u>Section 5.5.3</u> for more details)

Replace

Allows curve values to be changed by overtyping the x and y values.

Insert Before


Inserts a new point in the curve before the selected point.

Insert After

Inserts a new point in the curve after the selected point.

Delete


Deletes the selected point.

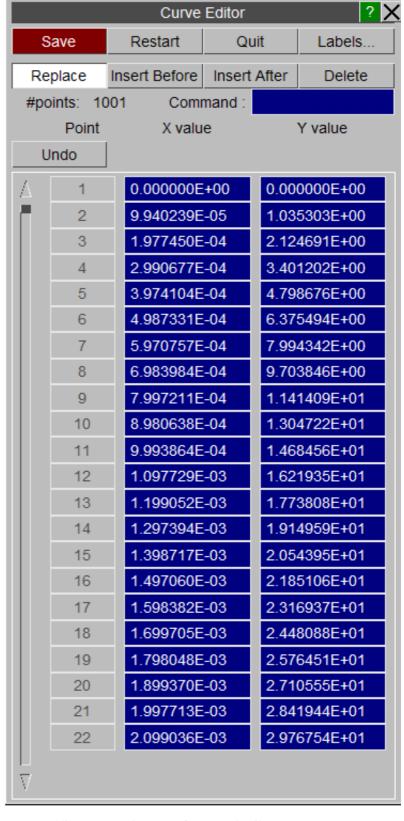


The **Command** text-box allows control by command line (see <u>Section 5.5.2</u> for more details).

5.5.1 Interactive Curve Editing

After a curve has been selected it is displayed using a thicker line to highlight it in any graphs that it is visible in.

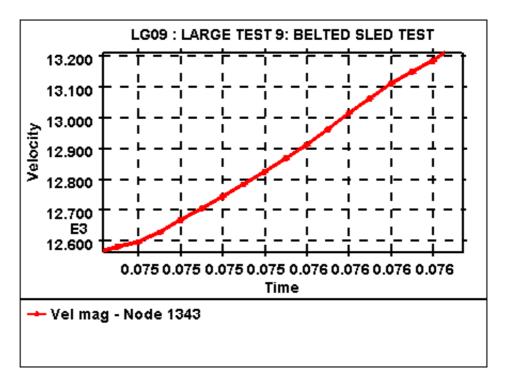


As well as being highlighted the curve points can be edited interactively and the Quick Pick menu in the main Tool Bar (see Section 6.1 for more details) is replaced with the EDIT menu.

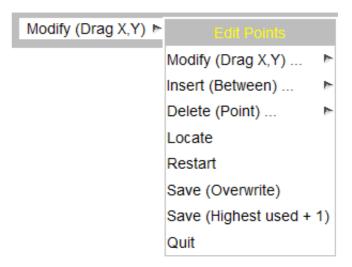

5.5.1.1 Modify



Drag X,Y Modify the point nearest to the screen pick by dragging it's position in both the X and Y axis directions.

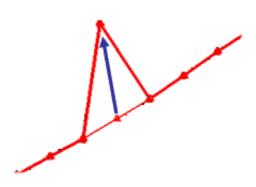

Drag X Drag a point in the X axis direction only.

Drag Y Drag a point in the Y axis direction only.

5.5.1.2 Insert Insert (Between) ...

Between

At Cursor


Split segment 2

At Start

At End


Between

Finds the nearest segment to the point selected on the screen and then projects the point onto the segment.

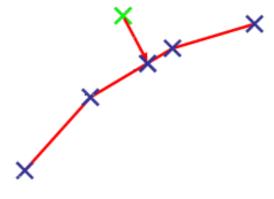


At Cursor

Finds the nearest segment to the point selected on the screen and then inserts the a point at the screen location between the 2 ends of the segment.

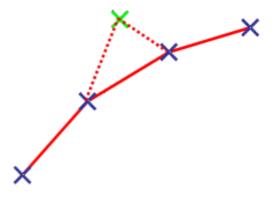

Split Segment

Finds the nearest segment to the point selected on the screen and then splits the segment in 2 or more parts.

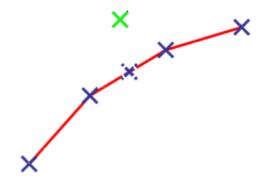


At Start

Inserts a new point at the screen location before the first point in the curve.

At End

Inserts a new point at the screen location after the last point in the curve.

5.5.1.3 Delete Delete (Point) ...



Point

Finds the nearest point to the screen pick and deletes it.

To End

Finds the nearest point to the screen pick and deletes all points in the curve from that point onwards.

From Start

Finds the nearest point to the screen pick and deletes all points in the curve up to that point.

5.5.1.4 Locate

Finds the nearest point to the screen pick and updates the list of points in the main edit panel so that the points either side of the picked point are displayed.

5.5.1.5 Restart

Resets the curve being edited to the values at the start of the edit session.

5.5.1.6 Save (Overwrite)

Overwrite the original curve with the edited one.

5.5.1.7 Save (Highest used + 1)

Save the edited curve as a new curve without overwriting the original curve.

5.5.1.8 Quit

Quits the curve editor without making any changes to the curve.

5.5.2 Command line mode

In command line mode editing of curves is done in a similar fashion using the following commands.


E			2
Moving around the curve:	F	Forward	Move forward 16 lines
	В	Back	Move back 16 lines
	T	Тор	Move to the top of the curve
	E	End	Move to the end of the curve
	N	Number	Move to given line number
Modifying the curve:	Cn	Change	Change line n
	In	Insert	Insert points before line n
	An	Append	Append points after line n
	D n1 n2	Delete	Delete lines n1 to n2
	L	Label	Change the line label
	R	Reset	Reset the curve back to the original curve
Saving and Plotting the curve:	W	Write	Write the curve
	s	Save	As write
	PE	Plot Edited	Plot the edited curve
	PA	Plot All	Plot the edited and original curve
	PL	Plot	Plot the current T/HIS curves
	Q	Quit	Quit the editor

In command line mode the EDIT menu is reached by typing /ED

5.5.3 Curve Labels

Each curve has four labels associated with it:

Title The title string at the top of the plot X label The label for the X axis of the plot Y label The label for the Y axis of the plot Label The label applied to the line itself

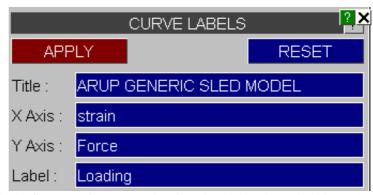

The first three are only used on a plot if this curve is the first (or only) curve to be plotted, and the relevant labels are in "automatic" mode (see <u>TITLE</u> and AXIS).

You can change any of these by simply overtyping whatever is currently there. When you are happy with the result use the **APPLY** button to dismiss this box, saving the new values. The labels here are scratch values, current only in this editor, the permanent curve labels are only overwritten with them if you **SAVE** this edited curve.

RESET will restore the scratch labels to the original values of the permanent curve being edited.

The title, axis and line labels can also be modified using the dialogue box

5.6 LINE STYLES

The **LINE STYLE** menu is shown in the figure (right). This menu can be used to change the colour, width, style and symbol for any of the curves that are currently being used.

When a curve file is written, T/HIS will save the line style for each curve in the file.


The lower half of this panel contains a list of all the curves that are currently being used. By default the curve that was clicked on in the **CURVE CONTROL** menu will be highlighted and the colour and symbol buttons in the top section of the menu will show the setting for that curve.

The **SAVE...** button can be used to save the current set of line styles to a file while the **RELOAD...** button can be used to reload a set from a previously saved file. The **DEFAULT** button will reset all the curve styles to the original T/HIS settings.

If you wish to modify the colour/style of more than one curve at a time additional curves may be selected by pressing the button next to each curve number that depicts the current line style.

SELECT_ALL and DESELECT_ALL may be used to select/deselect all the curves.

Line Styles can also be edited using the dialogue box

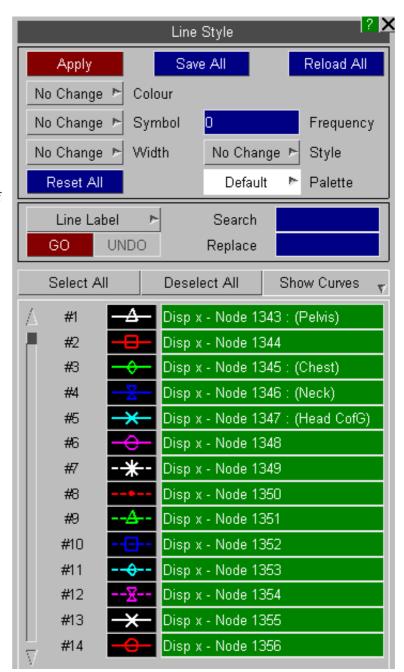

5.6.1 **APPLY**

This button will **APPLY** the current line colour, symbol, width and style selection to all the curves that have been selected.

5.6.2 **COLOUR**

Pressing the right mouse button while over the colour button will invoke a colour popup menu.

T/HIS has a built in palette of 30 predefined colours and 6 user defined colours. Colours are defined using 6 digit Hexadecimal values using the format RRGGBB.

RR Red Component (0-255) GG Green Component (0-255) BB Blue Component (0-255)



Colour ID	Name	Alternative Name	Value
1	COL 1	WHITE	FFFFFF
2	COL 2	RED	FF0000
3	COL 3	GREEN	00FF00
4	COL 4	BLUE	0000FF
5	COL 5	CYAN	00FFFF
6	COL 6	MAGENTA	FF00FF
7	COL 7	YELLOW	FFFF00
8	COL 8	ORANGE	FF9C00
9	COL_9	TURQUOISE	21FF94
10	COL 10	INDIGO	7B00FF
11	COL 11	LIME	BDFF39
12	COL 12	SKY	39BDFF
13	COL 13	PINK	FF7B7B
14	COL 14	BLACK	000000
15	COL 15	PALE YELLOW	FFFF9C
16	COL 16	GOLD	FFCE00
17	COL 17	OLIVE	7B7B00
18	COL 18	DARK MAGENTA	9C3163
19	COL 19	MEDIUM GREEN	9CCE00
20	COL 20	MEDIUM BLUE	7B7BFF
21	COL 21	HOT PINK	FF9CCE
22	COL 22	LIGHT PINK	FFCE9C
23	COL 23	SEA GREEN	317B63
24	COL 24	MAROON	7B0000
25	COL 25	DARK GREEN	007B00
26	COL 26	PURPLE	7B007B
27	COL 27	NAVY	00007B
28	COL 28	DARK GREY	393939
29	COL 29	MEDIUM GREY	7B7B7B
30	COL 30	LIGHT GREY	BDBDBD
31	COL 31	USER 1	-
32	COL 32	USER 2	-
33	COL 33	USER 3	-
34	COL 34	USER 4	-
35	COL 35	USER 5	-
36	COL 36	USER 6	<u> </u>


As well as the 36 colour options **Foreground** and **Background** can be selected to change the colour to the **Foreground** and **Background** colours defined in the <u>Display</u> menu.

If **N/C** is selected then the **Apply** button will have no effect on the colour of the currently selected curves..

5.6.3 **SYMBOL**

Pressing the right mouse button while over the **Symbol** button will invoke a symbol popup menu that allow any of the 9 T/HIS symbols to be selected (the 9th is a blank symbol that can be selected so that a curve can be plotted without a symbol). As well as the 9 symbols the menu also contains a "No Change" option.

The **Symbols Frequency** controls how often a symbol is drawn on a curve. By default, symbols are not drawn; they can be switched on using the <u>Display</u> menu.

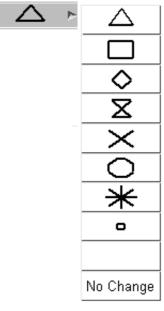

5.6.4 **WIDTH**

Pressing the right mouse button while over the width button will invoke a popup menu that allows 4 different line widths to be selected or "No Change".



5.6.5 **STYLE**

ressing the right mouse button while over the style button will invoke a popup menu that allows 8 different line styles to be selected (the 3rd is actually a blank line that can be selected so that a curve can be plotted without a line).

As well as the 8 line styles the menu also contains a "No Change" option.




5.6.6 **CURVE PALETTE**

By default T/HIS uses 6 colours (White, Red, Green, Blue, Cyan and Magenta) for any curves that have not had a colour explicitly defined for them. Curves 1,7,13... will be White, 2,8,14... will be Red.


This option can be used to change the default number of colours T/HIS uses.

Default	Use the default 6 colours
Extended	Use the first 13 colours
No Grey	Use all 30 predefined colours except the 3 grey ones
Full	Use all 30 predefined colours plus any user defined ones.

The default value for the curve palette can also be specified in the "preferences" file (see <u>Appendix H</u> for more details).

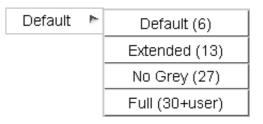

5.6.7 MODIFYING LABELS



Multiple curve labels may be edited using the Search and Replace option to enter the string to search for and the string to replace it with ^ can be used to insert text at the beginning of a label while \$ can be used to append to the end of a label. The table below shows the effect of 2 search and replace examples.

	Example 1	Example 2
Original Label	Displacement N1034	Time
Search String	N1	\$
Replace String	Node 1	(s)
Modified Label	Displacement Node 1034	Time(s)

The **GO** button will initiate the search and replace on all the curves that are currently selected (highlighted in the bottom half of the menu), while the **UNDO** button can be used to reset the labels to what they were before the search and replace.

Pressing the right mouse button while over the **Line Label** button will invoke a popup menu that allows the label that is being modified to be swapped between the **Line Label**, **X-Axis Label** and the **Y-Axis Label**.


Line labels can also be modified by using the <u>dialogue box</u>



5.6.8 **SELECTING CURVES**




By default the Style menu will display a list of all the current defined curves so that the style for individual curves can be

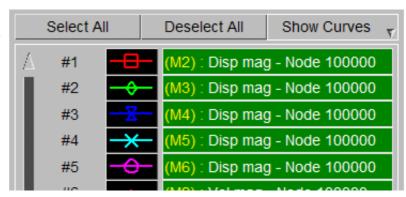

Instead of displaying individual curves the style menu can be changed to display a list of any currently defined curve groups.

If curve groups are selected then the style will be applied to all of the curves in the curve group.

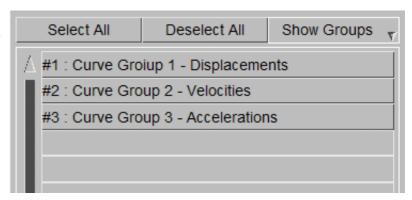

The style menu can also display a list of all the models currently loaded in T/HIS.

If models are selected then the style will be applied to any curve that was created using data from the model.



5.6.9 LINE STYLE EDITING IN THE DIALOGUE BOX

/_ T/HIS > /cur Curve > /cur


The dialogue box can be used to edit curve styles

To access this feature, enter the command /style at the Command prompt

Enter M at the STYLE > command prompt for a list of all available dialogue box commands

The following commands are available:

SET READ WRITE DEFAULT FIX GM

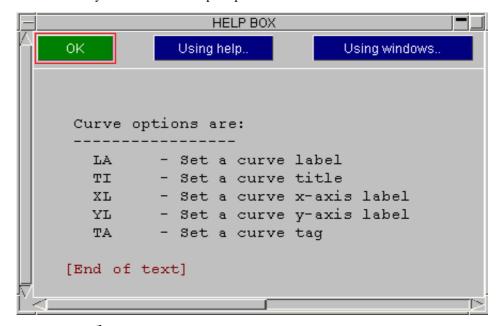

SET

This option allows the user to set the style properties for individual curves.

Enter the curve number (e.g #1 for curve 1) at the Select Curve? command prompt.


T/HIS will prompt the user to input the desired style properties in the order:

Colour; Enter the colour for the line Line Width; Enter the desired line width for the line

Line Style; Enter the desired line style (e.g. dashed) for the line

Symbol Type; Enter the desired Symbol Type

Symbol Frequency; Enter the desired frequency of the symbols in the format

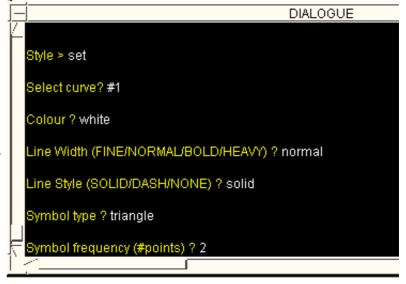

READ

This option allows the user to read a style file containing style information and apply that style to a particular curve

Enter the name of the style file at the Style File? command prompt.

WRITE

This option allows the user to write a style file containing style information.

DEFAULT

This option allows the user to reset all the curve styles to the default settings.

FIX

This is an **ON/OFF** switch which resets the curve styles when they are plotted on the screen so that the curves cycle through the default T/HIS colours and styles as they are plotted. This will result in the first curve being plotted always being white, the second red, the third green, etc regardless of their curve numbers. The default is **OFF**.

GM

This option will display the Global Menu in a separate window

5.6.10 LABEL AND TITLE EDITING IN THE DIALOGUE BOX

The dialogue box can be used to edit curve labels, x-axis and y-axis labels and curve titles

To access this feature, enter the command /cur at the Command prompt

T/HIS > /cur

Enter M at the CURVE > command prompt for a list of all available dialogue box commands

The following commands are available:

LA TI XL YL TA

```
OK Using help.. Using windows..

Curve options are:

LA - Set a curve label

TI - Set a curve title

XL - Set a curve x-axis label

YL - Set a curve y-axis label

TA - Set a curve tag

[End of text]
```

ΙΔ

This option allows the user to edit the label for individual curves.

Enter the curve number at the Select curve? prompt


Enter the desired new label at the Label prompt, The current Label will be displayed in brackets


ΤĪ

This option allows the user to edit the title for individual curves.

Enter the curve number at the Select curve? prompt

Enter the desired new title at the Title prompt, The current title will be displayed in brackets

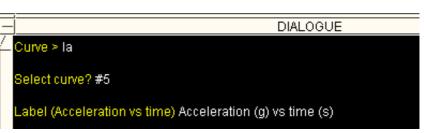

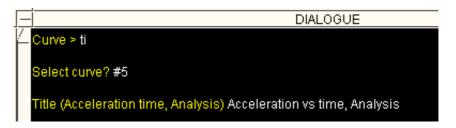

XL

This option allows the user to edit the x-axis label for individual curves.

Enter the curve number at the Select curve? prompt

Enter the desired new title at the X-Axis prompt, The current x-axis label will be displayed in brackets

ΥL

This option allows the user to edit the y-axis label for individual curves.

Enter the curve number at the Select curve? prompt

Enter the desired new title at the Y-Axis prompt, The current y-axis label will be displayed in brackets


TA

This option allows the user to edit the tag for individual curves.

Enter the curve number at the Select curve? prompt

Enter the desired new Tag at the Tag prompt, The current tag will be displayed in brackets



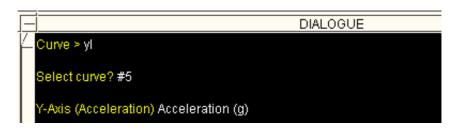




5.7 Command / Session Files

Command and session files are used to drive or record a T/HIS session. Both session (save) and command (playback) files have been set up to act like tape recorders; and the concept of "recording" and "playing back" files will be used below.

These files ("button click" command files) are not easy to edit by hand and they are not always backwards compatible between versions of T/HIS. For these reasons most users prefer the new FAST-TCF format, which can also be recorded and played back from within T/HIS.

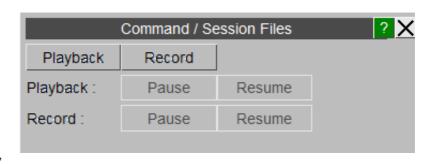

In screen menu mode a command has a meaning beyond the simple command word. For example, **HELP** appears in many different places, with a distinct meaning (or relevance) in each place. Therefore, context information is stored when saving screen menu session files.

In practice the following information is saved:

- the command itself whether typed of inferred from a button
- the button identification (if any)
- the parent window identification
- the menu item (if relevant)
- the action type (screen pick, button press, etc)
- any x/y coordinates that may be relevant.

A choice of either writing ("recording") session files or executing ("playing back") command files is given. By default commands are not saved. If they are to be saved the session file record switch must be turned on.

5.7.1 Writing ("Recording") Session Files

To write a session file the record **CONTROLS...** button must be pressed, displaying the **RECORD COMMAND FILES** menu shown right.

Pressing the **RECORD** > button will start the session file. Thereafter, all commands (except those in the session/playback windows) are saved in an internal scratch file. In order to save these commands to disk they must be written explicitly using the **SAVE TO DISK** button. They can then be read back in and replayed

A variety of features are available to help move around the file. These are shown in the **FILE POSITION AND CONTROL** area of the panel. The file can be indexed at particular user defined points using the **INDEX MARKS** menu is accessed by pressing the **INDEX...** button. These may be used as targets of a search and also to control recording.



The scratch file is random access, and can be moved back and forth and reviewed at will. To help with this it is possible to switch between **RECORD** and **REVIEW** modes in the session file control box:

RECORD records all your commands when running

REVIEW plays back your recorded commands

A command file can be stepped through or run backwards or forwards. It may also be searched for a particular command. As with a real tape recorder, if the pointer is moved backwards and recording continued the commands that were previously stored will be overwritten from that point.

The session file recording and command file playback operations are totally separate: they can be thought of as two separate tape recorders. As a consequence it is possible to record commands that are being played back: in effect it is possible to edit and combine files.

5.7.2 Executing ("Playing Back") Command Files

As above, the PLAYBACK COMMAND FILES menu, shown right, must be invoked from the COMMAND/SESSION FILES window.

This is done by pressing the playback **CONTROLS...** button. An existing file must then be read. This is analogous to loading a tape into the tape recorder: it is then converted into an internal scratch format (random access, as above) and can be played back of previewed at will.


Once a file is read in either **PLAYBACK** or **PREVIEW** mode may be selected:

PLAYBACK actually executes the commands,

PREVIEW simply lists them without executing them.

The file may be stepped through backwards or forwards at will, and searches made for commands. Playback commences at the current line when PLAY is pressed, so it is possible to skip unwanted commands or repeat a sequence.

As with **RECORD** above, index marks can be inserted, which may be used as targets of a search and also to stop playback.

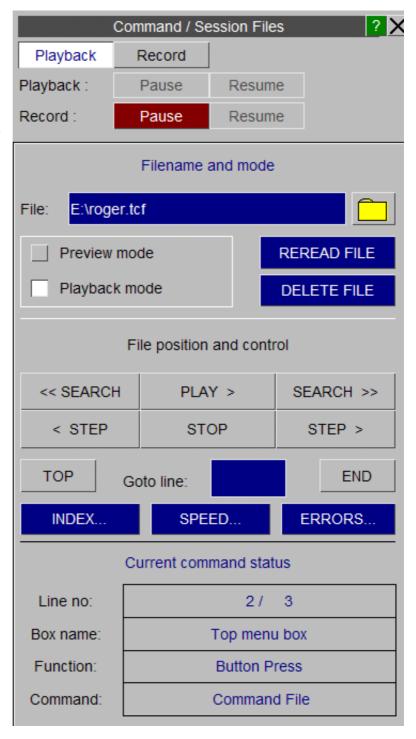

5.7.3 INDEX MARKS

"Index marks" are optional flags that you can set at any line in a file. They are not interpreted as commands but rather treated as markers which are used as targets of SEARCH operation. Index mark functions are:

SET Set an index mark on this line;
CLEAR Clear an index mark set on this line
STOP Stop in PLAY/REVIEW mode

when index found

IGNORE Ignore index marks during PLAY/REVIEW


FIND Finds the next index mark: "<<" searching backwards, ">>"

searching forwards

CLEAR Clear all index marks in the file

ALL

5.7.4 SEARCH

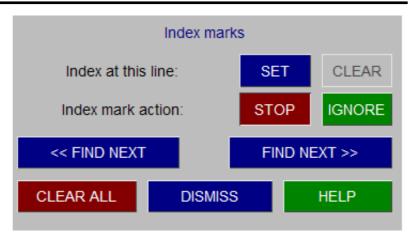


The **SEARCH** buttons can be used to find a specific command when in **REVIEW** mode. You can search through the command file for a match to any permutation of the following:

Box name The name of a screen menu box inside' which an event occurred

Function The screen menu function type. This is "button press", "dialogue", etc;

Command The command word(s) to look for

The default for all of these is "<any>", ie a wildcard search, but you can specify a value by typing into the appropriate text box. When you have filled in all the fields you need, press APPLY to start the search. "Box name" and "Function" fields are unlikely to be of use to most users, you can list all valid events using "?" button to provide a menu to pick from. The ANY button may be used for any field to restore it to its default (wildcard) status.

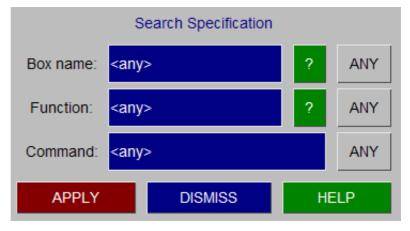

5.7.5 Command Line Mode Session / Command File Control

The available features in command line mode for command and session file control are very basic. A session file can recorded at any point by typing SF (in the GLOBAL MENU) followed by the desired filename. This is equivalent to the RECORD button in screen menu mode. The session file can be closed by typing CS and is automatically written to disk. This is equivalent to pressing the STOP and SAVE TO DISK buttons in screen menu mode.

To execute an existing command file in T/HIS simply type CF, followed by the filename.

No previewing/reviewing or editing of command/session files is possible in command line mode.


5.7.6 Command Files From Earlier Versions Of T/HIS


Command files recorded in Version 9.0 or earlier will not work in T/HIS15.0.

5.8 IMAGE Options

5.8.1 **BMP,JPEG** ...

This menu can be used to save an image containing one or more graphs in a number of different formats.



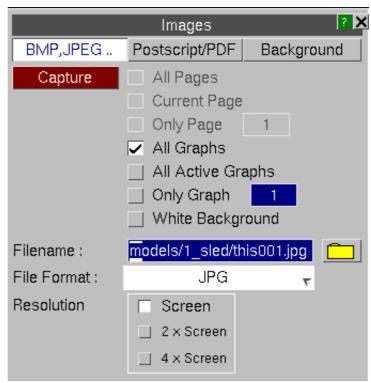

All Pages Each page will be saved as a single image to multiple files. The filenames used will be based on the filename selected by the user..

This option will only be available if T/HIS contains multiple graphs on more than one page (see section 3.2).

Current Page A single image containing currently displayed page will be generated.

This option will only be available if T/HIS contains multiple graphs on more than one page (see section 3.2).

Only Page (n) A single image containing the selected page will be generated.

This option will only be available if T/HIS contains multiple graphs on more than

one page (see section 3.2).

All Graphs A single image will be generated containing all of the graphs.

This option will only be available if T/HIS only contains a single page (see Section

<u>3.2</u>).

All Active Graphs A single image will be generated containing all of the currently active graphs.

This option will only be available if T/HIS only contains a single page (see Section

<u>3.2</u>).

Only Graph (n) A single image containing the selected graph will be generated.

White Background Captures the image with a white background and black foreground. Once the image

is captured the colours are reset to their original values.

5.8.1.1 File Format

8-bit file formats

BMP Uncompressed Uncompressed 8 bit Microsoft windows

bitmap. The approximate size of the file (in

bytes) is

file size= image width * image height

BMP Compressed 8 bit RLE Microsoft windows bitmap.

PNG 8 bit Portable Network Graphics

GIF Graphics Interchange Format

24-bit file formats

BMP Uncompressed 24 bit Microsoft windows

bitmap. The approximate size of the file (in

bytes) is

file size = 3 * image width *image height

PNG 24 bit Portable Network Graphics

JPG JPEG (Joint Photographic Experts Group)

file

PPM Uncompressed Portable PixMap. The

approximate size of the file (in bytes) is

file size = 3 * image width *image height


5.8.1.2 Resolution

All images can be output at either the screen resolution or at a resolution of either 2 or 4 times the screen resolution.

8 bit BMP (Uncompressed) 8-bit file formats BMP (Uncompressed) BMP (Compressed) PNG GIF 24-bit file formats BMP PNG

JPG


PPM



5.8.2 Postscript

This menu can be used to save an image containing one or more graphs to either a PDF or Postscript file.

All PDF and Postscript files are generated using raster images so that the contents of the screen is exactly reproduced.

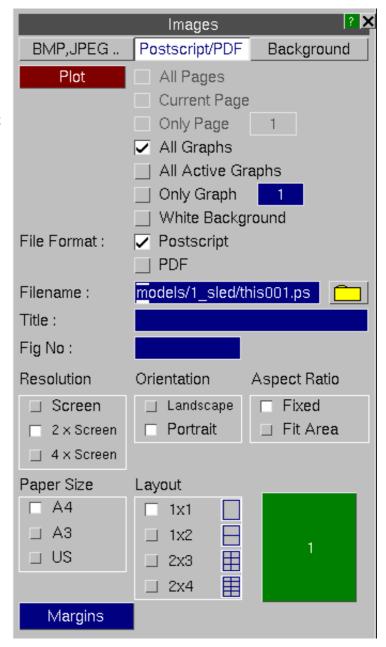

All Pages

All T/HIS pages containing 1 or more graphs will be saved to a single file.

This option will only be available if T/HIS contains multiple graphs on more than one page (see Section 3.2).

Current Page

The current T/HIS page will be saved.

This option will only be available if T/HIS contains multiple graphs on more than one page (see Section 3.2).

Only Page (n)

A single image containing the selected page will be generated.

This option will only be available if T/HIS contains multiple graphs on more than one page (see Section 3.2).

All Graphs

A single image will be generated containing all of the graphs.

This option will only be available if T/HIS only contains a single page ($\underline{see\ Section}\ \underline{3.2}$).

All Active Graphs A single image will be generated containing all of the currently active graphs.

This option will only be available if T/HIS only contains a single page (see Section


<u>3.2</u>).

Only Graph (n) A single image containing the selected graph will be generated.

White Background Captures the image with a white background and black foreground. Once the image

is captured the colours are reset to their original values.


5.8.2.1 File Format



All images can be output at either the screen resolution or at a resolution of either 2 or 4 times the screen resolution.

5.8.2.2 Title and Fig Number

By default PDF and Postscript files are not labeled and have no figure number, but you may add either or both of these. They are always put at the bottom of each page, along the short edge, regardless of the orientation used for plots.



5.8.2.3 Resolution

All images can be output at either the screen resolution or at a resolution of either 2 or 4 times the screen resolution.

☐ Screen ☐ 2 x Screen ☐ 4 x Screen


5.8.2.4 Orientation

All images can be output in either landscape or portrait format.



5.8.2.5 Aspect Ratio

By default all images are output using a fixed aspect ratio. This option can be used to stretch each image to fit the available space on the page. Different scaling factors will be applied to the horizontal and vertical directions and the image will be distorted.



5.8.2.6 Paper Size

The paper size can be set to be either A4 (210 x 296mm), A3 (296 x 420mm) or US (letter - 216 x 279mm). The default size is A4.



5.8.2.7 **Layout**


Multiple plots on a page are also available. In landscape format there is a choice of 1, 2x2, 3x3 and 4x4 plots to a page. In portrait format there is a choice of 1, 1x2, 2x3 and 2x4 plots on a page. By default there is a single plot on a page.

When multiple plots are requested the order in which they are performed can be defined.




5.8.2.8 **Margins**

The Margins can be used to change the top, bottom, left and right margins for each page.

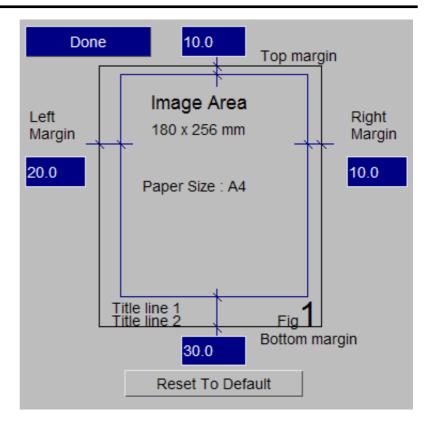

5.8.3 Background

This option can be used to add a background image to each graph (see section 5.16.8 for more details).

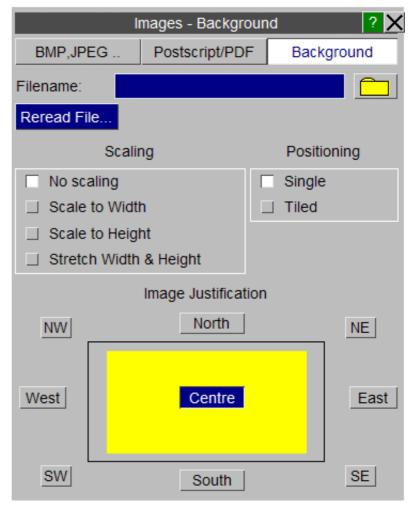

5.9 **OPERATE** Options

The **OPERATE** menu shown in the figure (right). If the mouse is left hovering over an option a short description of the function will appear. For these functions, the user selects a range of curves to be operated on. A range may be one or more curves, making it possible to operate on multiple curves, for example add 20 curves to 20 curves.

ABS	ADD (y)	ADD (x)	AVE	CAT	CLIP
COM	DIF	DIV (y)	DIV (x)	ENV	ERR
INT	LSQ	MAP	MAX	MIN	MON
MUL (y)	MUL (x)	NOR (y)	NOR (x)	ORDER	REC
RES	REV	R-AVE	SMO	SQR	STRESS
SUB (y)	SUB (x)	SUM	TRA	VEC	VEC(2D)
WINDOW	ZERO	dB	dBA	Octave	

The options with the **OPERATE** menu are split into 3 groups. The first group require 2 sets of curves as input. The second group require a single set of curves as input. The third group also require a single set of curves as input but the output from these functions is a single curve. (See Section 5.0 for more information on curve groups).

- **5.9.1 ABS** Produces the absolute y-values of a curve.
- **5.9.2** ADDAdd the y axis values together for two curves or add a constant value to all the y-values. If two curves are being added together they must have identical x-axis values. If not, the resultant curve is generated by considering every x-coordinate on both curves and by interpolating the other curve as needed. Any duplicate points as well as points outside the range where the input curves overlap are culled as needed.
- **5.9.3 ADX** Add the x axis values together for two curves or add a constant value to all the x-values. If two curves are being added together they must have identical y-axis values. If not, the nth x-value from the second curve is simply added to the corresponding x-value on the first curve and the y-value from the first curve gets used by the resultant as is.
- **5.9.4 AVE** Produces a single curve that is the average of the input curves.
- **5.9.5 CAT** Concatenate the second curve to the end of the first.

5.9.6 CLIP


Clip a curve to remove any points that exceed a set of specified minimum and maximum x & y axis value. The user is prompted for minimum and maximum values after the curves have been selected..

Instead of typing in values for the limits individual x and y axis minimum and maximum values can be selected by picking screen points. In addition to picking individual points an area can be dragged out interactively to set all 4 limits.

When picking screen points the default is to allow any point to be selected.

Snap to curve points

can be used to select the point on the nearest curve instead of the screen coordinates.

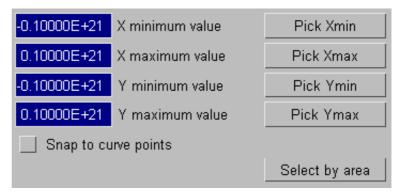

5.9.7 COM

Two curves are combined to give a new curve. For example if a displacement/time curve is combined with a velocity/time curve a velocity/displacement curve will result.

If the 2 curves do not contain points at the same x values then the curve with the larger x-axis intervals is automatically mapped on to the x-axis values of the other curve.

If the curves do not start and finish at the same x-axis values then only the points for which the two curve x-axes overlap are mapped onto each other.

5.9.8 DIF A curve is differentiated with respect to the x-axis variable.

5.9.9 **DIV**

Divide the y axis values of the first curve by the y axis values of the second curve (or a constant). If two curves are being used they must have identical x-axis values. If not, the resultant curve is generated by considering every x-coordinate on both curves and by interpolating the other curve as needed. Any duplicate points as well as points outside the range where the input curves overlap are culled as needed.

5.9.10 DIX

Divide the x axis values of the first curve by the x axis values of the second curve (or a constant). If two curves are being used they must have identical y-axis values. If not, the nth x-value on the first curve is simply divided by the corresponding x-value on the second curve and the y-value from the first curve gets used by the resultant as is.

5.9.11 **ENV**

Produces a single curve that bounds the maximum and minimum values of the group of input curves.

5.9.12 ERR

This option reports the degree of correlation between 2 input curves. The first curve selected is used as a reference curve and the following parameters are then reported:

Maximum difference: Value & Time

Value as a %age of reference curve Value as a %age of reference curve peak

value.

Average difference - Value

%age of reference curve peak value

Area Weighted Difference Correlation Parameter 0 to 1

_

For more details on this function please see Appendix G

5.9.13 INTA curve is numerically integrated with respect to the x-axis variable using Simpson's rule.

5.9.14 **LSQ** Fits a straight line through the points using the least squares method.

5.9.15 **MAP** The second curve is mapped onto the first curve, the resulting curve has identical x-axis values to the reference (first) curve with y-axis values obtained from the mapped (second) curve.

5.9.16 MAX Produces a single curve that bounds the maximum values of the group of input curves.

5.9.17 MIN

Produces a single curve that bounds the minimum values of the group of input curves.

5.9.18 **MON**

Sorts a curve into monotonically increasing x-axis values.

5.9.19 MUL Multiply the y axis values together for two curves or multiply all the y-values by a constant. If two curves are being multiplied together they must have identical x-axis values. If not, the resultant curve is generated by considering every x-coordinate on both curves and by interpolating the other curve as needed. Any duplicate points as well as points outside the range where the input curves overlap are culled as needed.

5.9.20 **MUX**


Multiply the x axis values together for two curves or multiply all the x-values by a constant. If two curves are being multiplied together they must have identical y-axis values. If not, the nth x-values on the two curves are simply multiplied together and the y-value from the first curve gets used by the resultant as is.

5.9.21 **NOR**

Normalize a curve so that the y axis values lie in the range [-1, +1].

If the manual normalizing range is checked then a custom value can be chosen to normalize with. The custom value chosen for normalizing is calculated by taking the absolute maximum of the user-defined textbox values.

In addition to this is the option to Lock to the specified Min and Max axis values which can be used for normalizing the curve to the axis value.

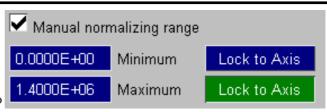

$$y_{val} = \frac{y_{val}}{\max(|\text{MinV}|, |\text{MaxV}|)}$$


Where,

MinV = Minimum Value

5.9.22 NOX Normalize a curve so that the x axis values lie in the range [-1, +1].

If the manual normalizing range is checked then a custom value can be chosen to normalize with. The custom value chosen for normalizing is calculated by taking the absolute maximum of the user-defined textbox values.

In addition to this is the option to Lock to the specified Min and Max axis values which can be used for normalizing the curve to the axis value.

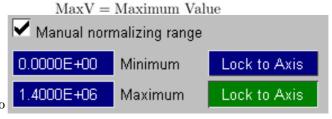

$$x_{val} = \frac{x_{val}}{\max(|\text{MinV}|, |\text{MaxV}|)}$$

Where,

MinV = Minimum ValueMaxV = Maximum Value

5.9.23 **ORDER** Reverse the order of all the points in the curve.

5.9.24

Produces the reciprocal of the y-values of a curve.

REC

Calculate the vector magnitude from a group of input curves.

5.9.25 **RES**

5.9.26

REV

Reverses the x and y axes of a curve. For example if you start with a curve with displacement (y axis) against time (x axis) you end up with a curve of time (y axis) against displacement (x axis).

5.9.27 **R-AVE**

Produces a single curve of the running average on the input curve.

0.0000 Averaging Window

If the time window is set to 0 then the y values for the output curve are the average value of all the point up to that point.

If the time window is non-zero (T) then the y values at each point are calculated by averaging the values between -T/2 and +T/2.

5.9.28 **SMO**

A moving average technique is used to smooth (filter) a curve. The user will be prompted for a smoothing factor.

Smoothing Factor > 1 (integer) 7

The integer refers to the number of points included in the averaging of each point. The value you want will depend on the number of points in the curve and the amount of smoothing required. A certain amount of trial and error is necessary to get the required result.

5.9.29

Take the square root of the y-values of a curve.

SQR

5.9.30 Converts a stress / strain curve between True and Engineering Stress / Strain.

STRESS

5.9.31 SUB Subtract the y axis value (or constant) of the second curve from the first curve. If two curves are being subtracted they must have identical x-axis values. If not, the resultant curve is generated by considering every x-coordinate on both curves and by interpolating the other curve the other curve as needed. Any duplicate points as well as points outside the range where the input curves overlap are culled as needed.

5.9.32 **SUX** Subtract the x axis value (or constant) of the second curve from the first curve. If two curves are being subtracted they must have identical y-axis values. If not, the nth x-value from the second curve is simply subtracted from the corresponding x-value on the first curve and the y-value from the first curve gets used by the resultant as is.

5.9.33 **SUM** Calculates the sum of a group of curves. This "sums" up the y-axis values of a group of curves, and maps the result onto the x-axis of the first curve.

5.9.34 TRA

Translate a curve with respect to the x and y axes. The user is prompted for the x and y values.

X Translation 0.0000
Y Translation 0.0000

5.9.35 **VEC** Calculate the vector magnitude from three input curves.

5.9.36

Calculate the vector magnitude from two input curves.

VEC(2-D)

5.9.37 **WINDOW**

This function is typically used to modify a curve before carrying out an FFT on it.

The y-axis values for each of the input curves is multiplied by a factor between 0 and 1. Three different window shapes are available. The **Store Window Curve** option can be used to output the multiplying factors to a separate curve if required.

5.9.38 **ZERO**

Translate a curve so that the first data point is moved to (0,0).

By default this option will translate the curve in both X and Y, alternatively the curve can be translated in X only or Y only.


5.9.39 dB Converts a curve to dB.


 $f(x) = 20\log(y/ref)$

5.9.40 **dBA**

Converts a curve from dB to dBA by applying 'A" weighting factors to the curve values.

- Narrow band A weighting values are calculated using a formula.
- 1/3 Octave A weighting values are calculated from a lookup table.

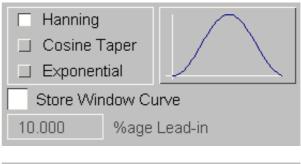





- Use "narrow band" A weighting
- Use 1/3rd Octave A weighting

5.9.41 **Octave**

Converts a curve from narrow band to either Octave bands or 1/3 rd Octave bands.

The input curve can either be a curve that has already been converted to dB or it can be an unconverted "linear" curve.

The output curve can also be generated using either Mean values or RMS values.




5.9.42 **Regres**

Fits data with either a linear, polynomial (degree 1-4), logarithmic or exponential regression curve, using least squares.

The equation of the regression curve, as well as the value of Pearson's correlation coefficient, R^2, can be found by right-clicking the output curve and selecting properties. The value of R^2 gives a measure of the goodness of fit of the regression curve, with a value close to 1 corresponding to a good fit.

In the case of linear regression, the standard deviation of the gradient, intercept and y values are also provided in the properties pop-up accessed through right-clicking the curve. Additionally, 95% confidence and prediction bands can be displayed around the linear regression curve by selecting 'Properties' in the top right panel, then selecting 'all curves' and ticking 'Show CBands' next to the output regression curve. The confidence band, which is the inner of the two bands, gives a 95% confidence interval at each x value for the best value of y. The prediction band gives a 95% confidence interval at each x value for predicting a new value of y.



Regression data

Curve equation y = -28.54094x + 0.38050

Pearson's R*2 0.916936 S.D. y = bx + c 0.050093 S.D. Gradient 0.608944 S.D. Intercept 0.007040

5.10 MATHS Options

 SQRT
 LOG
 EXP
 LOG10
 ** n
 LOG(x)

 LOG10(x)
 SIN
 ASIN
 COS
 ACOS
 TAN

 ATAN
 ATAN2
 ATAN
 AT

The **MATHS** menu is shown in the figure (right). This menu allows mathematical operations to be applied to curves. These options are self explanatory and work on the y-value of the curve (except where explicitly stated).

Note: Trigonometrical functions expect the user to work in radians

5.10.1 SQRT	The square root of a curve.
5.10.2 LOG	Natural log (to base e)
5.10.3 EXP	e to power of.
5.10.4 LOG10	Log to base 10
5.10.5 **n	Raise to power n.
5.10.6 LOG(x)	Log to base 10 (x-axis values)
5.10.7 LOG10(x)	Log to base 10 (x-axis values)
5.10.8 SIN	Sine (radians assumed)
5.10.9 ASIN	Arc sine
5.10.10 COS	Cosine
5.10.11 ACOS	Arc cosine
5.10.12 TAN	Tangent
5.10.13 ATAN	Arc tangent
5.10.14 ATAN2	Arc tangent using two curves

5.11 AUTOMOTIVE Options

The **AUTOMOTIVE** menu is shown in the figure (right). The automotive options are a number of operations that can be performed on curves, typically finding their use in the Automotive industry. They consist of filters and injury criteria calculations, along with a number of other useful functions.

<< Undoc	k	Autor	notive		? ×	
C60	C180	C600	C1000	BUT	BUT(p)	
FIR	HIC	HIC(d)	3ms CLIP	EXC	VC	
ASI	THIV	NIJ	ПП	NOR (y)	NOR (x)	
REG	VEC	VEC(2d)	ACU	COR1	COR2	
COR3	WIF					

All the options in the **AUTOMOTIVE** menu require a single set of curves as input except the <u>VEC</u> and <u>VEC(2D)</u> options which require groups of 3 or 2 curves respectively as input but only output a single curve. (See <u>Section 5.0</u> for more information on curve groups).

Notes on using the various filters

5.11.7 FIR

When filtering curves the sampling rate of the data should be considered: it should be at least twenty times the filter cutoff frequency if good results are to be obtained.

T/HIS will reject attempts to filter curves for which the sampling rate is too low, if this happens the **REG** option can be used to increase the number of points. This will allow the filter to function although it is not a good substitute for obtaining data at a higher sampling rate.

For more information on the filters and injury criteria calculations see Appendices D & G.

All of the filters expect the input curve to have a consistent time interval. When using one of the filter options the user can specify a time interval for the curve to be automatically regularised to (<code>REG</code>) before filtering if the time interval is not consistent. The user can set a default time interval for regularising the input curves in the PREFERENCE menu. The PREFERENCE menu can also be used to automatically convert the x axis values from milliseconds to seconds before filtering and to convert the curve back to milliseconds afterwards.

5.11.1 C60	Filter a curve using a standard SAE Class 60 filter.				
5.11.2 C180	Filter a curve using a standard SAE Class 180 filter.				
5.11.3 C600	Filter a curve using a standard SAE Class 600 filter.				
5.11.4 C1000	Filter a curve usin	g a standard SAE Class 1000 filter.			
5.11.5 BUT	The curve is passed through a Butterworth filter. The user is prompted for the cutoff frequency and the order of the filter.	Cut-off frequency (Hz) 1000.0 Filter order (integer) 1			
5.11.6 BUT(p)	This passes a curve through a Pure Butterworth filter. This is the same as the BUT function above, but the two refinements, described in Appendix D, to minimise end-effects and phase change errors are not included.				

Special filter for US "SID" dummy.

5.11.8 HIC

Calculates the Head Impact Criteria from an acceleration time history. The user is prompted for the time window and the acceleration conversion factor.



Normally this option writes the HIC value to the screen. If required the values may also be written out to a file using the **WRITE TO FILE** option.

The time unit for the input curve should be seconds. T/HIS look at the range of the x-axis values and if the range is >1 then T/HIS will assume the x-axis values are in ms and it will automatically divide the x-axis values by 1000.

If the y-axis values are not in (G) then an optional factor can be specified that T/HIS will DIVIDE the y-axis values by to convert them to (G).

Example factors for different units are:

Unit	Factor
m/s^2	9.81
$$ mm/s 2	9810
mm/ms ²	0.00981

In addition to calculating and reporting the HIC value the time window and value can be displayed on the graph using the $\bf Show\ HIC\ Value\ option.$

See Appendix E for more details on the Head Impact Criteria calculation.




5.11.9 **HIC(d)**

HIC(d) is used to calculate the Head Injury Criteria for the Free Motion Headform used within the FMVSS201 legislation. The equivalent dummy HID(d) is calculated as follows

HIC(d) = 0.75446x (free motion headform HIC) +166

5.11.10 CLI

Calculates the **3ms clip** value from an acceleration time history. Normally this option writes the value to the screen, and produces a curve of the clip region.

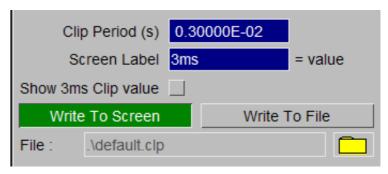


By default the screen value will be labeled as "3ms = value". This label can be modified by specifying a different **Screen Label**.

If required the values may also be written out to a file using the **WRITE TO FILE** option. In addition to calculating and reporting the 3ms clip value the time window and value can be displayed on the graph using the **Show 3ms Clip Value** option.

See Appendix E for more details on the 3ms clip calculation.


5.11.11 **EXC**

Calculate and displays an **EXC**eedence plot. This is a plot of force (y-axis) versus cumulative time (x-axis) for which the force level has been exceeded. By default the **Automatic** option will create an exceedence plot using either the +ve OR the -ve values depending on which the input curve contains most of. The **Positive** option will calculate the exceedence plot using only the points with +ve y values. The **Negative** option will calculate the exceedence plot using only the points with -ve y values.



5.11.12 VC

Calculates the Viscous
Criteria from an acceleration time history. The user is prompted for the constants A and B. See Appendix E for more details on the VC calculation.

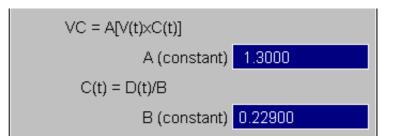


5.11.13 ASI

Acceleration Severity Index. This value is used to assess the performance of road side crash barriers.


This option requires 3 acceleration input curves. The user is prompted for the acceleration limits in the 3 directions.

The calculation method can be set to 2010 (BS EN 1317-1:2010) or 1998 (BS EN 1317-1:1998). See Appendix E for more details on this calculation.

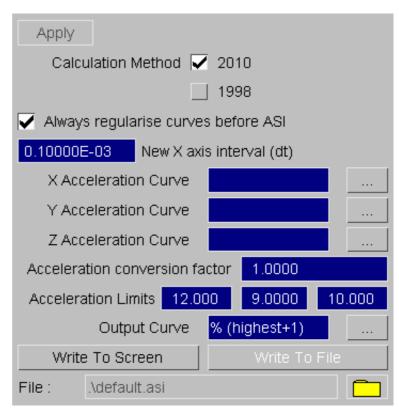

5.11.14 THIV


Theoretical Head Impact Velocity and the Post Impact Head Deceleration. These values are used to assess the performance of road side crash barriers.

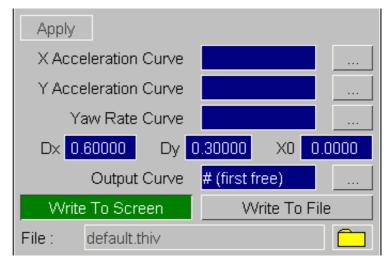

This option requires 3 input curves, a longitudinal and lateral acceleration and a rotation rate. The user is prompted for the constants Dx, Dy and Xo. See Appendix E for more details on these calculations.

5.11.15 NIJ

Biomechanical neck injury predictor. Used as a measure of injury due to the load transferred through the occipital condyles.

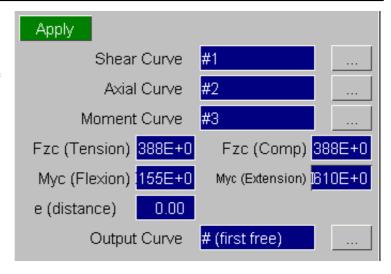

This option requires 3 input curves. 1 to represent Shear force, 1 to represent Axial force and a third to represent bending moment in the dummy's upper neck loadcell. Enter these curves in the corresponding input boxes.


The 4 critical constants used to calculate NIJ; Fzc (tension), Fzc (comp), Myc (flexion) and Myc (extension) default to the values specified by the test creators. These can be changed by entering different values into the respective boxes.

Enter the e distance into the e (distance) box.

Select which curves you wish to output to in the Output box.

For more information on the calculation of NIJ, refer to Appendix E

NIJ will output 4 curves due to the 4 possible loading conditions for Nij;

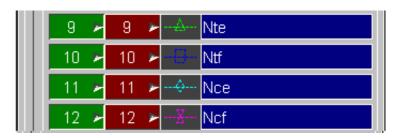


Nte is the tension-extension condition Ntf is the tension-flexion condition Nce is the compression-extension condition Ncf is the compression-flexion condition

5.11.16 TTI

Thorax Trauma Index:

This option requires 3 input curves. 1 to represent the Upper Rib Acceleration, 1 to represent the Lower Rib Acceleration and a third to represent the Lower Spine Acceleration. Enter these curves in the


corresponding input boxes.

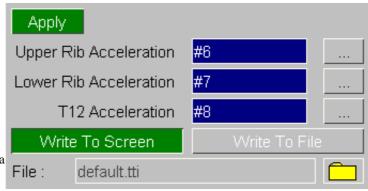

The output can either be written to the screen, appearing in a listing box, or written to a file specified in the File: input box, or both.

If the write to screen tab is highlighted, the following window will appear:

For more information on the calculation of TTI, refer to Appendix E

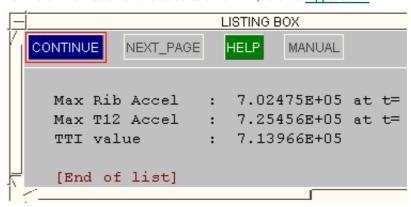

5.11.17 **NOR(y)**

Normalise the curve so that the Y values are within the range [-1, +1].

5.11.18 NOR(x)

Normalise the curve so that the X values are within the range [-1, +1].

5.11.19 **REG**

Make a curve have a constant time step.

It is necessary for a curve to have a constant time step between points for it to be filtered. This option takes an existing curve and prompts the user for a new time step. The points of the output curve are calculated by linear interpolation. Regularising a curve may alter its peak values, and could change filtered output slightly.

5.11.20 **VEC**

Calculate the vector magnitude of three input curves.

5.11.21 **VEC2D**

Calculate the vector magnitude of two input curves.

5.11.22 **ACU**

Airbag Control Unit

This option evaluates the following equation:

$$ACU(T) = \int_{T-n}^{T} (a(t) - m)dt$$

Where

m = user defined offset n = time to integrate over

5.11.23 COR1

Curve correlation function.

The Correlation function provides a measure of the degree to which two curves match. When comparing curves by eye, the quality of correlation may be judged on the basis of how well matched are the patterns of peaks, the overall shapes of the curves, etc, and can allow for differences of timing as well as magnitude. Thus a simple function based on the difference of Y-values (such as T/HIS ERR function) does not measure correlation in the same way as the human eye. The T/HIS correlation function attempts to include and quantify the more subtle ways in which the correlation of two curves may be judged.

The input parameters for the COR1 function have been chosen so as to produce a strict judgement of the correlation (see Appendix F for more details).

5.11.24 **COR2**

The COR2 function is the same as COR1 except the input parameters have been chosen so as to produce a less strict judgement of the correlation (see Appendix F for more details).

5.11.25 COR3

Another curve correlation function.

This function first normalises the curves using two factors either specified by the user or defaults calculated by the program (the maximum absolute X and Y values of both graphs). For each point on the first normalised curve, the shortest distance to the second normalised curve is calculated. The root mean square value of all these distances is subtracted from 1 and then multiplied by 100 to get an index between 0 and 100. The process is repeated along the second curve and the two indices are averaged to get a final index. The higher the index the closer the correlation between the two curves.

Note that the choice of normalising factors is important. Incorrect factors may lead to a correlation index outside the range of 0 to 100 (see Appendix F for more details).

5.11.26 WIF

Weighted Integrated Factor (WIFAC) curve correlation function.

Compares curves using the Weighted Integrated Factor method (WIFAC). A value between 0 and 100 is calculated, the higher the index the closer the correlation between the two curves.

See Appendix F for more details.

5.12 SEISMIC Options

The **SEISMIC** menu is shown in the figure (right). T/HIS can be used to handle response spectra information. In particular, displacement, velocity or acceleration spectra can be read and converted to another format.

Seismic						
DV	DA	VD	VA	AD		
AV	DS	RS	FFT	IFFT		
NCP	BLC					

5.12.1 DV	Displacement spectrum is converted to a velocity spectrum
5.12.2 DA	Displacement spectrum is converted to an acceleration spectrum
5.12.3 VD	Velocity spectrum is converted to a displacement spectrum
5.12.4 VA	Velocity spectrum is converted to an acceleration spectrum
5.12.5 AD	Acceleration spectrum is converted to a displacement spectrum
5.12.6 AV	Acceleration spectrum is converted to a velocity spectrum.
5.12.7 DS	Produce a design spectrum from a response spectrum through the specification of a broadening factor
5.12.8 RS	Produce a response spectrum from input accelerations. This gives the response of a damped single degree of freedom system, given its damping factor and period, to the input acceleration time-history.

There are three options for output;

- magnitude only
- magnitude and phase
- real and imaginary components of the time signal.

The frequency is calculated in Hz NOT radians/s if the time axis is in seconds.

T/HIS automatically adds points with zero y-value to the end of the curve to pad the curve out so that the number of points is increased to the next power of 2.

Perform a fast Fourier transform. Convert an input signal from the time to the frequency

There are two options for scaling the curves output:

- Scaling Option 1 Consistent with other signal processing software giving a magnitude
 independent of any padding. This is the default and recommended for most purposes.
 Performing an inverse FFT on the resulting curves will NOT get back exactly to the
 original curve if it did not have a number of points equal to a power of 2.
- Scaling Option 2 With this option, applying an inverse FFT to the resulting curves will generate a curve the same as the original even if the original curve did not have a number of points equal to a power of 2. This is useful if users wish to create their own filters, where the filter characteristic is defined in the frequency domain.

An option to regularise the curve before performing the function is on by default. The spacing between points on the frequency axis of the resulting curve is determined by the time duration of the padded input curve; dx = 1.0/(time).

The highest frequency in the output curve is determined by the time interval of the input curve; F(max) = (#points)/dt

5.12.9 FFT

5.12.10 IFFT

Performs an inverse fast Fourier transform. Converts two input signals from the frequency to the time domain. The two input signals can be the magnitude and phase or real and imaginary components of the time signal.

NOTE: If an FFT using scaling option 1 is performed on a curve that does not have a number of points equal to a power of 2 and then an IFFT is performed on the resulting curves you will NOT get back exactly to the original curve. This is because the FFT and IFFT both scale their output curves by the number of points in the curve, which in this case will be different. For the FFT the number of points used to scale the curves is the original number of points before padding. For the IFFT the number of points used is the original number of points plus the points needed to make it a power of 2.

If the number of points in the original curve is a power of 2 and no padding is required, the IFFT of the resulting curves will get back to the original curve.

5.12.11 NCP

By default beam element plastic rotations are always written out by LS-DYNA as being increasing +ve (i.e. cumulative). This option allows a non-cumulative plastic rotation to be calculated by taking two input curves: the moment/time and the cumulative rotation/time histories for the beam in question.

5.12.12 BLC

Baseline correction.

5.13 MACRO Options

The MACRO menu can be used to play FAST-TCF based macro files on existing T/HIS curves.


T/HIS macro files can be stored in any directory. Each user can define up to three macro areas using the oa pref option:

this*macro_directory: C:\blah\macros

T/HIS will read any .thm files within the macro directories and generate the macro menu (shown right) using keywords within the macro scripts. T/HIS will search the macro directories in the following order.

this*macro_directory from SYSTEM oa_pref file this*macro_directory from users oa_pref file this*macro_directory from local oa_pref file

The scripting for a macro in T/HIS is based upon FAST-TCF using variables within the script (see FAST-TCF section for more details). There are some extra command options to make T/HIS aware of input curves and constants within the macro. These macro keywords are as follows:

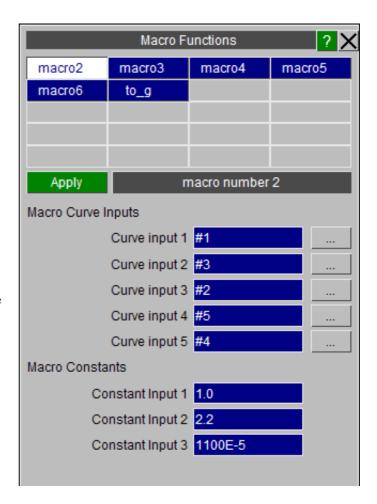

macro acr <name> acronym for the macro button in T/HIS
macro title <description> a more descriptive title for the macro

macro curve <curve variable> <curve description> FAST-TCF variable name for input curve followed by curve description

macro const <const variable> <curve description> FAST-TCF variable name for input constant followed by constant description

If one or more macro files are found with duplicate acronyms then only the last file read will be displayed so users can override SYSTEM macros with there own definitions if they want to.

When the user selects one of the Macro functions the macro file associated with the function is read and T/HIS creates a selection menu for the user to define the relevant curve numbers and constant values to input into the macro script. These inputs will **replace** the variables used within the macro.

For example: If the user selects #1 for the macro curve variable macro_input, then any occurrence of \$macro input in the macro script will be replaced by #1.

An example macro script follows. This macro asks the user for a filter option (e.g. c60, c600, c1000) and also an input curve number. The macro then filters the input curve and divides by 9810.

```
# Macro to convert a file to g after filtering
#
macro acr to_g
macro title filter and convert curve to g
macro curve macro_input input curve
macro const macro_filter filter to use
#
model none
model 1
oper $macro_filter $macro_input tag filtered
oper div filtered 9810.0
```

5.14 FAST-TCF Options

The **FAST-TCF** menu can be used to capture and playback FAST-TCF scripts. FAST-TCF is a simple and intuitive scripting language for T/HIS. See <u>FAST-TCF</u> (section 7) for more details and commands.


5.14.1 **Create**

T/HIS 9.2 onwards has the ability to automatically generate FAST-TCF scripts using the CREATE menu.

The FAST-TCF script will contain all of the commands required to

- 1. Create and position multiple graphs on pages.
- 2. Extract the data from models or other files
- 3. Carry out any curve operations required to reproduce the chosen curves
- 4. Set any curve styles and labels
- 5. Set plot attributes such as titles, axis labels, colours, fonts and scaling
- 6. Generate the output image and/or curve file
- 7. Generate curve groups
- 8. Generate variable and tabular output requests

Before generating the FAST-TCF script the following options can be set

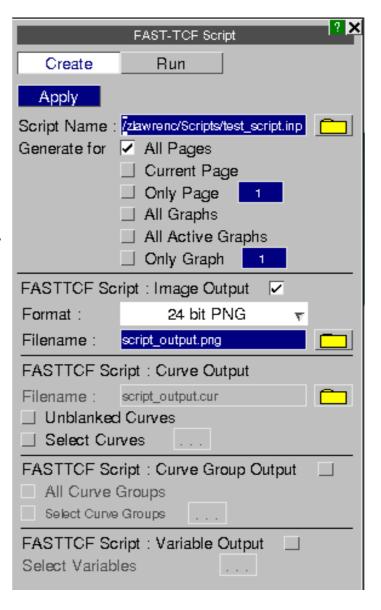

Generate For

All Pages The FAST-TCF script will contain all of the commands required to regenerate all of

the pages that contain 1 or more graphs.

If the option to generate images is selected then the FAST-TCF script will contain the commands to generate multiple images with the page number appended to the

filename specified.

Current PageThe FAST-TCF script will contain all of the commands required to regenerate the

currently displayed page.

Only Page (n) The FAST-TCF script will contain all of the commands required to regenerate the

selected page.

All Graphs The FAST-TCF script will contain all of the commands required to regenerate all

the currently defined graphs.

All of the graphs will be positioned on page 1 using the currently defined layout.

This option will only be available if T/HIS only contains a single page (see Section

<u>3.2</u>).

All Active Graphs The FAST-TCF script will contain all of the commands required to regenerate all of

the active graphs.

All of the graphs will be positioned on page 1 using the currently defined layout.

This option will only be available if T/HIS only contains a single page (see Section

3.2).

Only Graph (n) The FAST-TCF script will contain all of the commands required to regenerate the

selected graph.

The graph will be positioned on page 1.

FAST-TCF Script : Image Output

If this option is selected then the FAST-TCF script will contain the commands required to generate an image of each of the pages/graphs selected for output. The **Image Format** can be set to any of the supported image types (see Section 5.8).

If the FAST-TCF script generates multiple pages then the **Filename** specified will be used for the first image. Subsequent images will use the specified filename with "_2", "_3" ... appended.

FAST-TCF Script: Curve Output

By default the FAST-TCF script will only contain the command needed to reproduce the curves that are unblanked in 1 or more of the graphs selected for output. This option can be used to select additional curves for which the commands required to generate them are also added to the FAST-TCF script. If a curve is selected that is also unblanked in one of the graphs the command to regenerate it are only added to the FAST-TCF script once.

In addition to selecting additional curves this option can also be used to add commands to the FAST-TCF script to write the additional curves out to a T/HIS .cur curve file.

FAST-TCF Script: Curve Group Output


This option can be used to select additional curves for output to the FAST-TCF script by curve group. If a curve is selected that is also unblanked in one of the graphs the command to regenerate it are only added to the FAST-TCF script once. This option will also add the commands to regenerate the selected curve groups to the FAST-TCF script.

FAST-TCF Script: Variable Output

This option can be used to define variable and tabular output requests for output to the FAST-TCF script via the menu launched by pressing the button. Variable and tabular output requests defined in a FAST-TCF script that is read in will appear in the menu.

Variable Output or Tabular Output are selected at the top of the menu. Each output request is defined on a row of the table. The curve and variable type are selected using the drop down menu. A default variable name is generated and can be manually edited or a name can be selected from variable names that are present in Reporter. Additional value fields are populated with default values if required and these can be edited. The output description is also populated with default text that can be edited. The output type is selected using the drop down menu. Curve Lock prevents the curve that the variable refers to from being deleted. If a curve is not locked and is deleted, then any variables associated with that curve will also be deleted.

Pressing the heading buttons will sort the output request definitions.

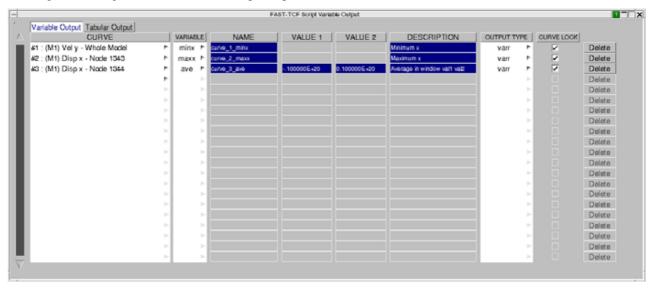

5.14.2 Run


This menu allows the user to run a FAST-TCF file from within T/HIS. After the user has selected the FAST-TCF file T/HIS scans the file for data requests and model requests to see what input the FAST-TCF file requires. Note that there must be a model read into T/HIS before a FAST-TCF file that contains data extraction can be run.

The next FAST-TCF command line is displayed in red in the upper text area, at this point the user can select to **Play** the FAST-TCF file or **Step** through it line by line. After every line of FAST-TCF the resulting command in T/HIS is shown in the lower text area. Select **End** during stepping through the lines to go to the end of the file. **Reread** will re read the file and start back at the beginning.

The **Model Mapping** option allows the user to define which model in T/HIS should be used for the equivalent model number in the FAST-TCF script. The model number **zero** is equivalent to the default model in FAST-TCF if no models are defined. The default model mapping will use the same model numbers as in the FAST-TCF script.

Auto confirm text boxes will force T/HIS to confirm any text boxes that should appear in the interactive playback of a FAST-TCF script (such as HIC results and so on).

The FAST-TCF script will ignore any existing T/HIS curves and their tags. This guarantees that the user can run a single FAST-TCF file many times and it will only use the new curves created by FAST-TCF.

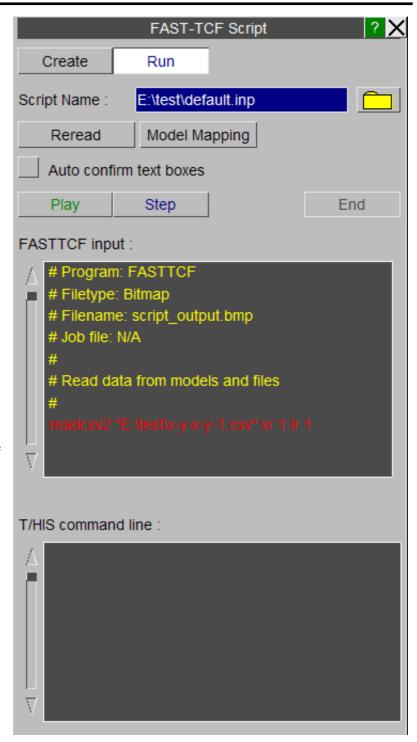

5.15 TITLE/AXES/LEGEND Options



The **TITLE/AXES** menu is shown in the figure (right).

This menu controls the contents of the title and axes labels and the axis scaling.

The individual axis, title and legend menus can also be accessed by clicking over the appropriately highlighted area on the graph.


Changes to the TITLE/AXES/LEGEND options are only applied to active graphs (see Section 3.5).

5.15.1 TITLE

The plot title may be set **AUTO**matically or manually. When the **AUTO** option is selected the text box will display <automatic> and the plot title will be set to the title of the first curve that is currently being plotted. The plot title may be turned on and off by toggling the **ON/OFF** button.

Save Preferences to File

Launches a popup to quickly save preferences to the oa_pref file. See Section 6.6.1

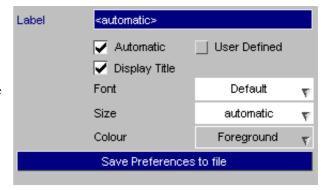

5.15.2 X-AXIS

AXIS LABELS

The x-axis label may be set automatically or a user defined label can be specified. When the **AUTOMATIC** option is selected the text box will display <**X automatic>** and the axis label will be set to the x axis label of the first curve that is currently being plotted. The axis label may be turned on and off by toggling the **Display Label** button.

In addition to displaying the axis labels an optional unit label can also be appended to the axis label. If the option to add a unit label is set to Automatic then the unit label displayed will depend on the current curves that are visible and the current unit system being used to display results (see Section 5.22 for more information on Unit Systems). If the curves being displayed do not have the same axis unit then no unit label will be displayed. The unit label may be turned on and off by toggling the Add Units button.

AXIS LIMITS


The minimum and maximum x axis values can be controlled using a combination of the text box and the popup menu opposite.

Autoscale

The axis values will be set to the maximum and minimum values of all the curves that are currently being plotted.

Locked

The axis limit is set to the user defined value specified in the text box. If the curves are translated of scaled dynamically the limit will be reset.

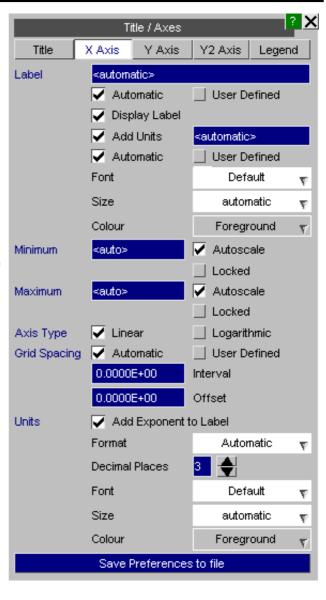

Note: The global command AUTOSCALE (see Section 4.6) will reset the minimum and maximum values to AUTO.

AXIS TYPE

The x-axis can be switched between a **Lin**ear or **Log**arithmic scale. If a **Log**arithmic scale is selected a warning will be generated if an attempt is made to plot points that have -ve or zero X values and the points will be skipped.

GRID SPACING

By default T/HIS will automatically set the grid line intervals for the x-axis when the grid is tuned on (see <u>Section 5.16.3</u>). If the GRID option is changed from **Automatic** to **Manual** a grid **Interval** and **Offset** my be specified. If the **Interval** is set to 0.1 and the **Offset** to 0.02 then grid lines will be produced at 0.02, 0.12, 0.22

UNITS

Axis values can be displayed using 3 different formats

Automatic

Values are displayed using exponential format, all values are displayed as values of E0, E3, E6 etc.

e.g 11.234E+03

Scientific

Values are displayed using exponential format.


e.g 1.123E+04


General

Values are displayed as real numbers.

e.g 11234.000

In addition to specifying the format, the number of decimal places can also be set between 0 and 9 and the colour and font used to display the values can be set.

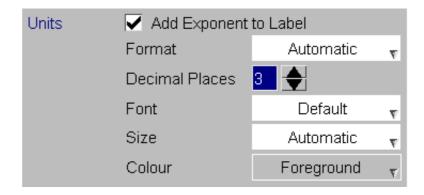

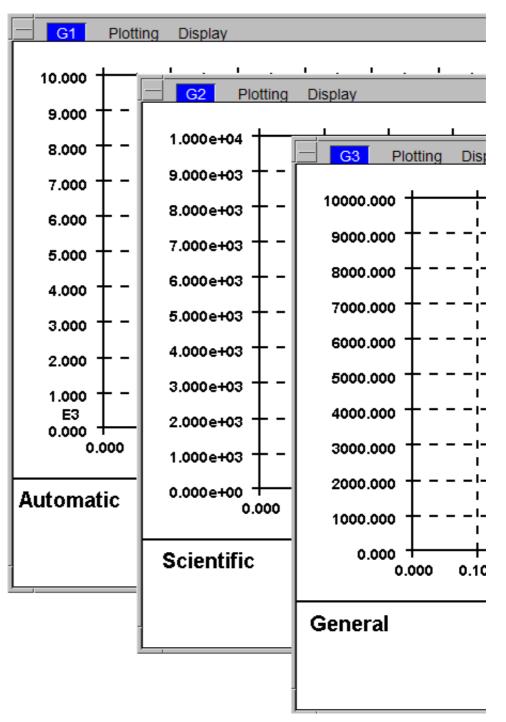

Save Preferences to File

Launches a popup to quickly save preferences to the oa_pref file. See Section 6.6.1


5.15.3 **Y-AXIS**

The same options for LABELS, LIMITS, SCALE, GRID LINES and UNITS apply to the Y-AXIS as those available for the X-AXIS.

5.15.4 Second Y-AXIS


Curves can be plotted in T/HIS using 2 different y-axis scales. When **DOUBLE Y-AXIS** is selected using the check box in the Y2 Axis menu the curve management window changes


from

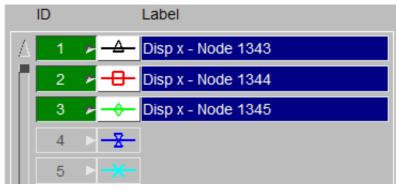

to

with an additional tick box for each curve that controls which curves are plotted against the second (right hand) y-axis.

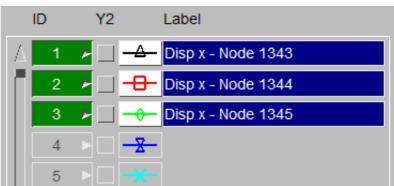

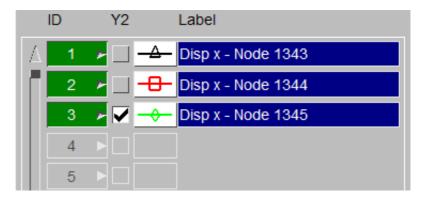

If only one y-axis scale is used it is not possible to meaningfully plot curves with different units or very different values. A second scale allows more information to be displayed at once, as demonstrated below.


To identify which axis a curve is being plotted against the line labels on the plot are automatically modified.


Second Y axis disabled

Left hand Y axis

Right hand y axis

Right hand y axis

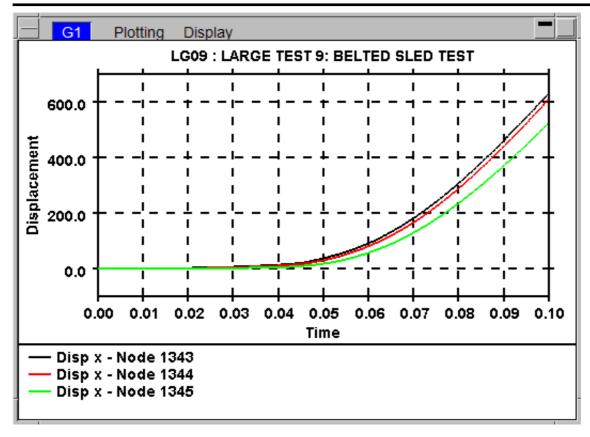

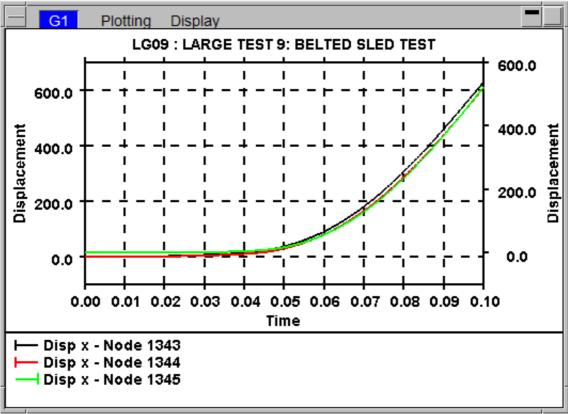

All of the options that are available to control the label, scale and type of the y-axis are also available for the second y-axis except for the Grid option.

NOTE: When the DOUBLE AXIS option is used with GRID lines a grid is only plotted for the left hand y-axis.

5.15.5 **Legend**

5.15.5.1 Curve Labels

Show Prefix

This option can be used to automatically add a prefix to each of the curve legends when a curve is plotted. This option has 3 settings

Automatic

If there is more that 1 model loaded in T/HIS then a prefix will automatically be added to any curves that have been read in from a model. Curves read in from other files will not be prefixed.

On

A prefix will automatically be added to any curves that have been read in from a model regardless of the number of models currently loaded in T/HIS. Curves read in from other files will not be prefixed.

Off


No prefixes will be added

Prefix Format

This option can be used to set the format used for the curve prefix. This option has 4 settings

Model Number	The model number will be used as the prefix. e.g (M1)
Directory	The directory name the model was read from will be used at the prefix. e.g. (/run1)
THF File	The root name of the THF file will be used as the prefix. e.g (sled_test)
User Defined	A user defined prefix will be used. The prefix can be defined on a model by model case using the Model Menu.

The font, size and colour of the text used to display the legends can also be specified.

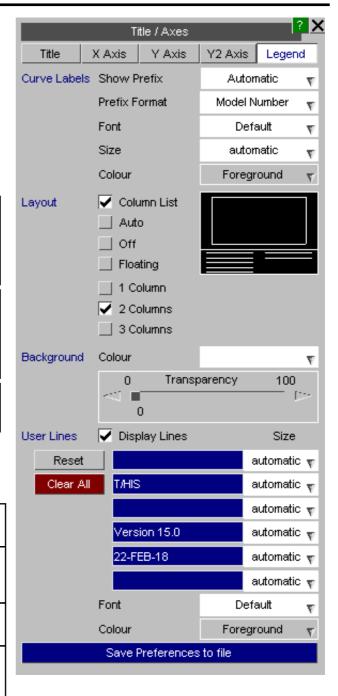


5.15.5.2 Layout

T/HIS has 4 different plotting formats as described below. The number of columns used to display the curve legends can also be set between 1 & 3. When multiple columns are used curve labels will automatically be truncated to fit the available space.

Column List (default)


This format fixes the size of the plotting area. The maximum number of curve legends that can be displayed will depend on the font family and size selected by the user and the number of columns.

If any <u>USER LINES</u> have been defined then the area used to display the legend will be reduced so that the text does not cover the

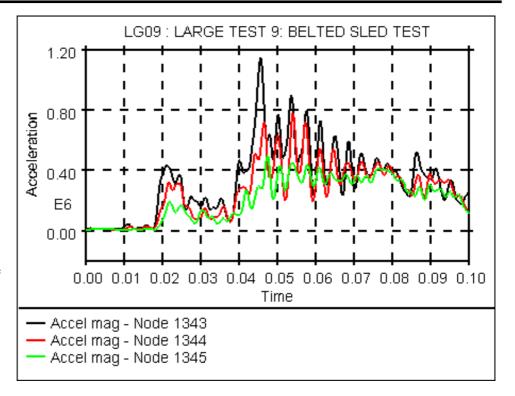


Automatic

This format automatically adjusts the plot size to maximise the plotting area while still showing a maximum of 18 line labels. Any text entered using the <u>USER LINES</u> option will be ignored in this plotting mode.

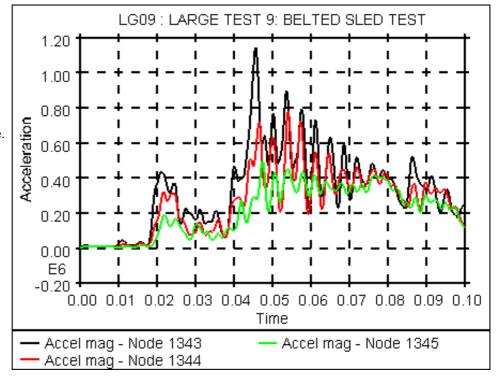


Off

This format turns **OFF** the display of the graph legend and maximises the plotting area by not showing any line labels. Any text entered using the <u>USER LINES</u> option will be ignored in this plotting mode.

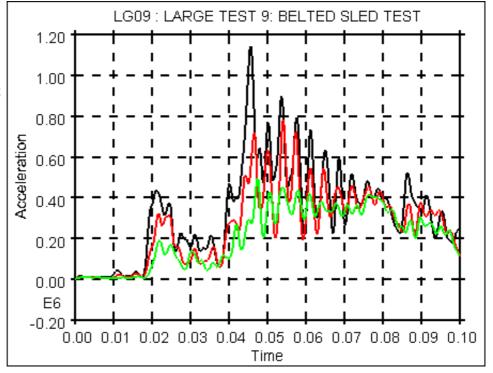


Floating

This format maximises the plotting area and positions the legend on top of the graph area.

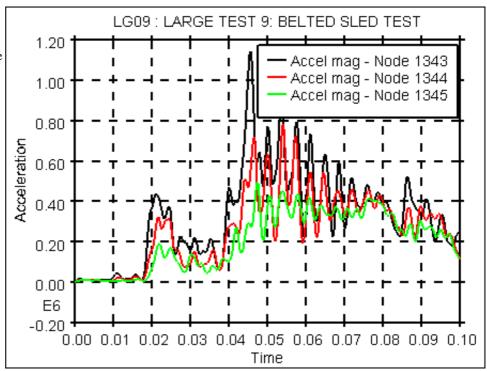

The size of the legend can be modified by clicking with the left mouse button on the legend border/corner and dragging.

The legend can also be moved by clicking with the left mouse button inside the legend and dragging.

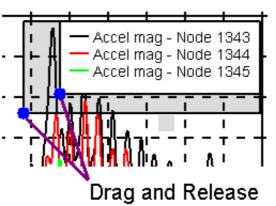

5.15.5.3 BACKGROUND

This option can be used to alter the default background colour of the floating legend. By default the colour will be the same as the background colour of the graph. As well as setting a different background colour for the floating legend a %age transparency can also be specified if the legend obscures any curves

5.15.5.4 USER LINES

This option can be used to alter the default text that appears on the bottom right-hand corner of each plot. Text can be typed into any of the panels or they can be left blank. The **Size** of the text may be altered. If no text is specified the area used by the curve legends will be increased.

The default values are read from the "preferences" file (see Appendix H for more details).

5.15.5.5 Save Preferences to File


Launches a popup to quickly save preferences to the oa_pref file. See Section 6.6.1

5.16 **DISPLAY** Options

The **DISPLAY** menu is shown in the adjoining figure. This menu controls the overall appearance of plots.

As well as controlling basic things like the background colour and whether a grid is draw this menu also controls a number of default setting that are applied to all curves. These default setting may be overwritten for individual curves using the **CURVE**MANAGER menu (see Section 5.3)

Changes to the Display options are only applied to active graphs (see Section 3.5)

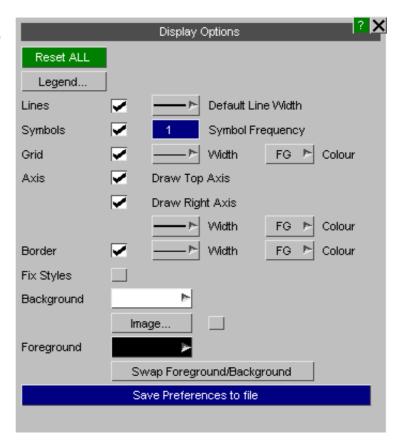

5.16.1 **LEGEND...**

This option will map the Legend settings panel (see Section 5.15.5)



This is an **ON/OFF** switch for the lines between points to be drawn for all curves. The default is **ON**. The **Default Line Width** is used for all curves that have not had their widths explicitly set in the **CURVE CONTROL** menu.

The default line width can be specified in the "preferences" file (see Appendix H for more details).



This is an **ON/OFF** switch which controls whether symbols are plotted on top of the curves to help identify them. This option affects all the curves that are currently being used. If you wish to turn the symbols on for only some of the curves then this switch should be set to **ON** and the **CURVE CONTROL** menu should be used to turn the symbols off on the curves for which you do not want symbols drawn on. The default is **OFF**.

The **Symbols Frequency** is used for all curves that have not had a frequency explicitly set in the **CURVE CONTROL** menu. This value controls how often a symbol is drawn on a curve.



This is an **ON/OFF** switch which determines whether or not grid lines are shown on the plot. The default is **OFF**. The **Grid Width** can be used to change the width of the grid and axis lines. The **COLOUR** button can be used to change the colour of the grid lines (see Section 5.6.2 for details on the available colours).

/de grid on turns grid lines on
/de grid off turns grid lines off
/de grid th 2sets the grid thickness to 2 pixels

The default grid width and visibility can be specified in the "preferences" file (see Appendix H for more details).



The **Axis Width** can be used to change the width of the axis lines. The **COLOUR** button can be used to change the colour of the axis lines (see Section 5.6.2 for details on the available colours).

Draw Top Axis This option can be used to turn on and off the display of the graphs top axis

Draw Right Axis This option can be used to turn on and off the display of the graphs right hand axis

The default axis width can be specified in the "preferences" file (see Appendix H for more details).


The default settings for these 2 options can also be specified in the "preferences" file (see Appendix H for more details).



This is an **ON/OFF** switch which determines whether or not a border is drawn round the plot. The default is **ON**. The **Border Width** can be used to change the width of the border. The **COLOUR** button can be used to change the colour of the border (see Section 5.6.2 for details on the available colours).

5.16.7 **FIX LINE STYLES** Fix Styles

This is an **ON/OFF** switch which resets the curve styles when they are plotted on the screen so that the curves cycle through the default T/HIS colours and styles as they are plotted. This will result in the first curve being plotted always being white, the second red, the third green .etc regardless of their curve numbers. The default is **OFF**.





This option can be used to modify the background colour (see Section <u>5.6.2</u> for details on the available colours) or to set a background image. By default the background colour is set to BLACK.

Image

The IMAGE option can be used to display a background image behind a graph instead of a solid background colour.

If the image dimensions do not match the graph window dimensions then the image can be scaled to fit or it can be tiled.

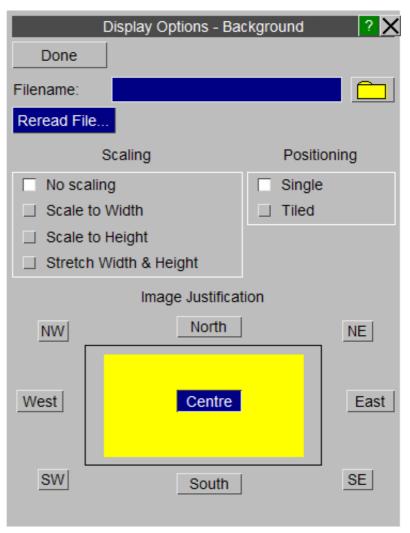

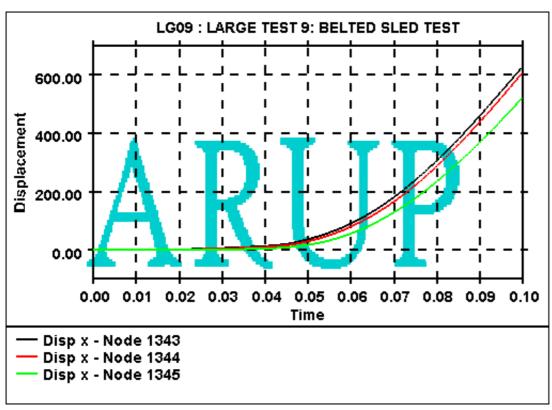

5.16.9 Foreground Foreground

This option can be used to modify the foreground colour (see Section <u>5.6.2</u> for details on the available colours). By default the background colour is set to BLACK and the foreground colour is set to WHITE.

Initially the grid, axes, border and labels are all set to the foreground colour.

5.16.10 **Swap Foreground/Background**

Swap Foreground/Background

This option can be used to swap the currently defined foreground and background colours.

5.16.11 Display Max/Min

In versions of T/HIS prior to 9.4 the display of minimum and maximum curve values was controlled in the **DISPLAY** menu . In versions since 9.4 these options have been moved to the **PROPERTIES** menu (see section 5.21).

5.16.12 Save Preference to file

Launches a popup to quickly save preferences to the oa_pref file. See section 6.6.1.

5.17 SETTINGS

5.17.1 Data Sources

This menu allows the user to specify their preferred order of data sources for the different data types. Upon reading in models T/HIS will read all files regardless of these preferences. When T/HIS extracts data for plotting the source is dependent on that currently set in this menu. If you select a data component or entity that is not available in the first data source T/HIS will automatically try the other data sources in order until the combination is found.

The <u>Model Manager</u> can be used to see what source has been used for each item for models already read into T/HIS

Settings ? X						
Data	Files		General		Layout	
	1st		2nd		3rd	
Global	LSDA	Þ	ASCII	Þ	THF	Þ
Parts	LSDA	Þ	ASCII	Þ	THF	Þ
Nodes	THF	Þ	LSDA	Þ	ASCII	Þ
Solids	THF	Þ	LSDA	Þ		▶
Beams	THF	Þ	LSDA	Þ		•
Shells	THF	Þ	LSDA	Þ		▶
Tk Shells	THF	Þ	LSDA	Þ		Þ
Stonewalls	XTF	Þ	LSDA	Þ	ASCII	Þ
Springs	XTF	Þ	LSDA	Þ	ASCII	Þ
Seatbelts	XTF	Þ	LSDA	Þ	ASCII	Þ
Retractors	XTF	Þ	LSDA	Þ	ASCII	Þ
Sliprings	XTF	Þ	LSDA	Þ	ASCII	Þ
Contacts	XTF	Þ	LSDA	Þ	ASCII	Þ
Reactions	XTF	Þ	LSDA	Þ	ASCII	Þ
Airbags	XTF	Þ	LSDA	Þ	ASCII	Þ
Joints	LSDA	Þ	ASCII	Þ		Þ
X Sections	LSDA	Þ	ASCII	Þ		▶
Subsystems	LSDA	Þ	ASCII	Þ		•
Geo Contacts	LSDA	Þ	ASCII	Þ		▶
Nodal RBs	LSDA	Þ	ASCII	Þ		Þ
Spotwelds	LSDA	Þ	ASCII	Þ		▶
SPCs	LSDA	Þ	ASCII	Þ		▶
BOUNDARYs	LSDA	Þ	ASCII	Þ		▶
FSIs	ASCII	Þ		▶		Þ
SPHs	LSDA	Þ	ASCII	Þ		Þ
Reset						

5.17.2 Files


File Names

By default the file filters in T/HIS are set to look for the file naming convention set for the LS-DYNA output files by the SHELL. This option can be used to swap the file filters back to the default LSTC naming convention. This option can be set in the Preference File

File	ARUP name	LSTC
		name
Time history	"jobname".thf	d3thdt
Extra Time	"jobname".xtf	xtfile
history		

File Output

The HIC, 3ms Clip, ASI, THIV, TTI
Automotive injury criteria functions and
ERR operator function can all send their
output to a file as well as to the screen.
These options can be used to select which
functions send output to a file and to
specify a Root Filename that is used for
all of the output files. The Root Filename
can be set in the Preference File

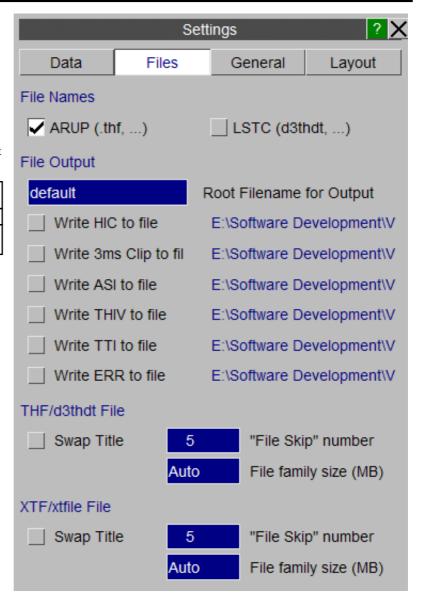

5.17.3 General


Curve Operations

All of the <u>AUTOMOTIVE</u> filters are designed to filter curves using seconds as the time unit. This option can be used to automatically convert the x-axis values of any curves from milliseconds to seconds before applying one of the filters. If a curve is automatically converted then the output curve is also automatically converted back into milliseconds. This option can be set in the <u>Preference File</u>

All of the <u>AUTOMOTIVE</u> filters require curves with constant time intervals. This option can be used to specify a default time interval that will be used to automatically regularise a curve before it is filtered.

By default the <u>HIC</u> and <u>3ms Clip</u> functions calculate and report a value to the screen. These options can be used to make T/HIS display the peak values and the time widows they occur over. These options can be set in the <u>Preference File</u>

At present 2 different methods are used to calculate the VC injury criteria for the ECER95 and IIHS regulations (see Appendix E for more details). This option can be used to set the default value. This option can be set in the Preference File

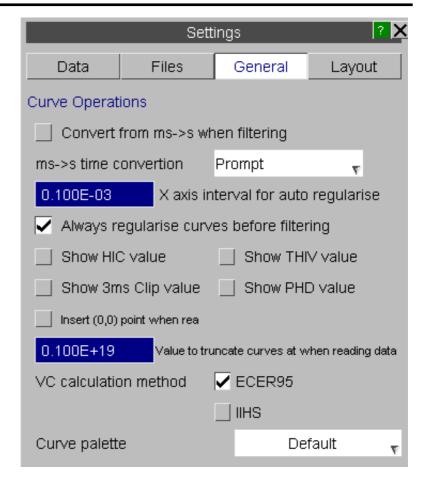

By default T/HIS uses 6 colours (White, Red, Green, Blue, Cyan and Magenta) for any curves that have not had a colour explicitly defined for them. Curves 1,7,13... will be White, 2,8,14... will be Red.

This option can be used to change the default number of colours T/HIS uses.

Default	Use the default 6 colours		
Extended	Use the first 13 colours		
No Grey	Use all 30 predefined colours except the 3 grey ones		
Full	Use all 30 predefined colours plus any user defined ones.		


The default value for the curve palette can also be specified in the "preferences" file (see <u>Appendix H</u> for more details).

5.17.4 Layout

Save Settings

This option can be used to save a T/HIS settings file which can be reloaded later. The settings file uses the same syntax as a FAST-TCF script except it only contains **layout** and **setup** commands.

The settings file can contain all of the commands required to reproduce the current page and graph layout or a subset of the commands.

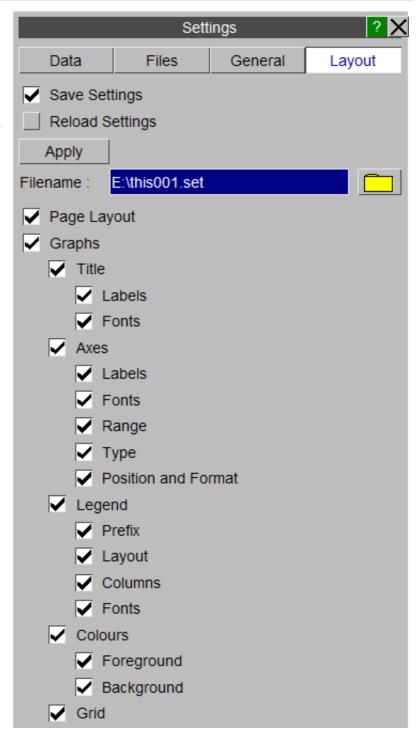


Reload Settings

This option can be used to reload a previously saved settings file. In addition to reloading a file interactively a settings file can also be specified on the commandline

-set=filename

or via the Preference File


this*settings_file: filename

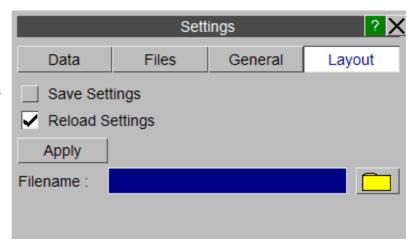

5.18 MEASURE


This menu can be used to make measurements between curve points and/or screen points. It can also be used to annotate graphs.

_	Read	VVrite	Curves	Models
Edi	t	Style	Properties	Images
Оре	erate	Maths	Automotive	Seismic
Mai	cros	FAST-TCF	Title/Axes	Display
Set	tings	Measure	Groups	Graphs
Cor	nmand Fil	Units	JavaScript	Datum

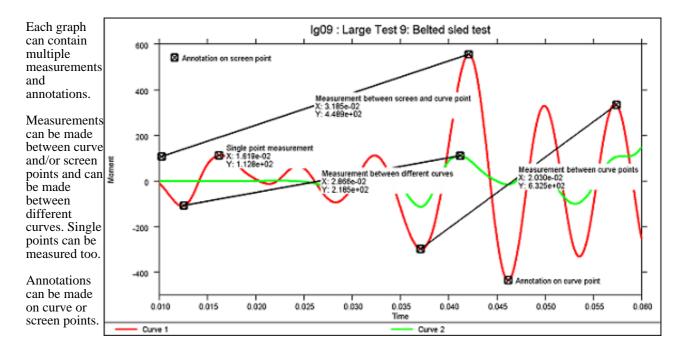


5.18.1 Measure

Use this option to pick points on the graph to measure between.

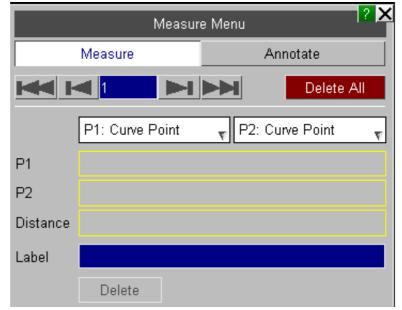

Point Types

Use the popups to select the point type to measure to/from.

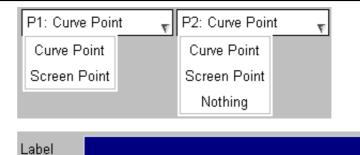

Label

If you specify a label this will be displayed on the measurement.


Delete

Delete

This will delete the current measurement.


5.18.2 Annotate

Use this option to make annotations on the graph.

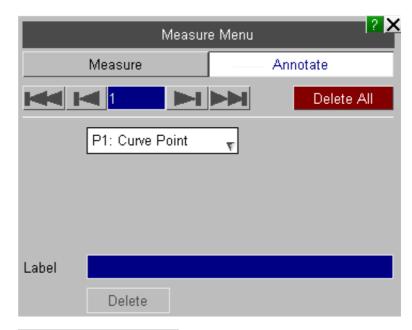

Point Type

Use the popup to select the point type to annotate on.



Label

This is the annotation that will be displayed on the graph.

Delete

Delete

Label

This will delete the current annotation.


5.18.3 Format


These options can be used to control the display of the measurements and annotations.

Values

Measurements can be displayed with both the X and Y values, just the X value, just the Y value or neither.

If only one of the values is shown the line between the two points will be drawn like so:

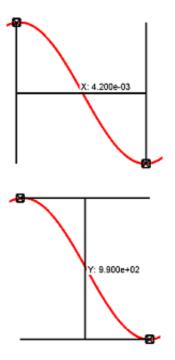

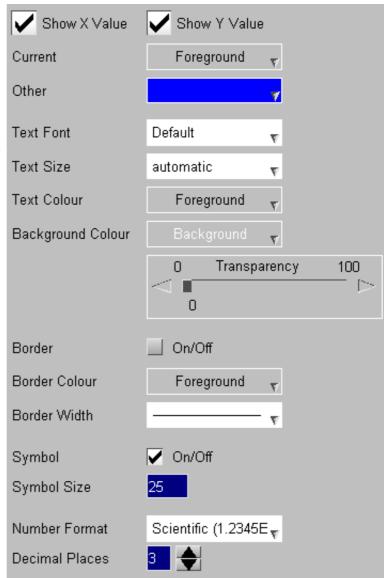

Text

The font, font size and colour of the values can be selected.

Background

To make it easier to read the values a background can also be specified. In addition to specifying the background colour a transparency value can be used to control the visibility of curves under the text.

Border and Border Colour

Specify a border and border colour to be added around the value.

Symbols

The symbols drawn on the measurement points can be turned on/off. The size of the symbol can also be specified.

Number Format


Specify the format of the values displayed on the graph.

5.19 Curve Groups

This panel can be used to create and modify curve groups. T/HIS can contain an unlimited number of curve groups each of which can contain any curve.

Curve groups can be used as input to most T/HIS functions that require one or more input curves (see Section 5.0 for more details)


Each curve group should be given a unique name.

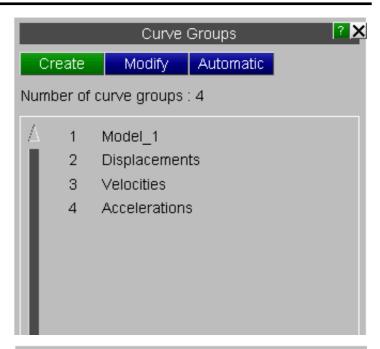

5.19.1 Create

This option can be used to create a new curve group.

By default the group will be called "Curve_group_#" where "#" is the curve group number if an alternate name is not specified.

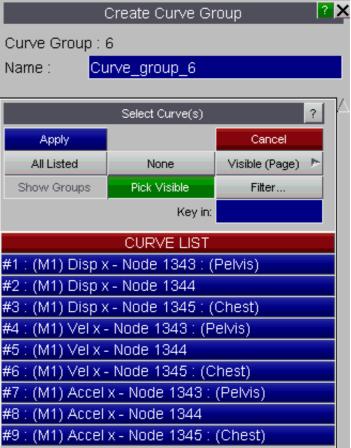

5.19.2 Modify


This option can be used to modify the contents of an existing curve group or it's name.


When a curve group is selected any curves that are already defined in the group are highlighted in the curve list.

The contents of <u>Automatic</u> curves groups can not be modified as <u>T/HIS</u> automatically adds and removes curves from automatic groups.

Curves that belong to an automatic curve group are highlighted in yellow.

The name of an automatic curve group can be changed.

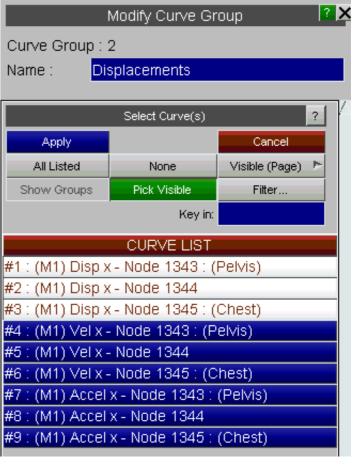


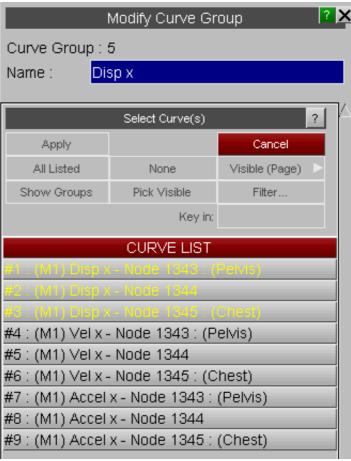

5.19.3 Automatic

By default T/HIS will automatically create a curve group for each model that is read in and will add any curves read in from that model into the curve group.

This option can be used to create other "automatic" curve groups.

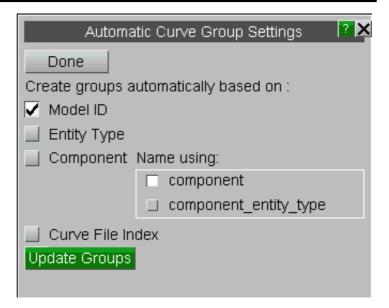

Model ID	The default - one group is created for each model.	
Entity Type	This option will create one group for each Entity type (Modal, Node, Solid etc) that data is read from. If data is read from multiple models then a single group for each entity type will be created containing curves from multiple models.	
Name	This option will create one group for each component (Node X displacement, Contact X Force etc), that data is read from. If data is read from multiple models then a single group for each component will be created containing curves from multiple models. The component groups can be named using either the component name (Disp X, Vel X) or the component name and the entity type (Disp X - Node, Vel X - Node)	
Curve File Index	If curves are read in from curve files (.CUR or CSV) then this option will create one group for the 1st curves read form each file, a second group for the 2nd curve read from each file and so on.	

Multiple options can be selected at the same time.

Update GroupsThis option will create and update the contents of automatic curve groups if the options are changed.

The following preference options can be used to change the default options, (see Appendix H for more details).

group_by_model
group_by_type
group_by_component
group_by_file_index
component_group_name

5.20 GRAPHS


This panel can be used to create additional graphs within T/HIS.

In addition to creating graphs this menu can also be used to control the layout of the graphs and to set up pages of graphs within T/HIS.

See Section 3.0 for more details.

Save Preferences to File


Launches a popup to quickly save preferences to the oa_pref file. See <u>Section 6.6.1</u>

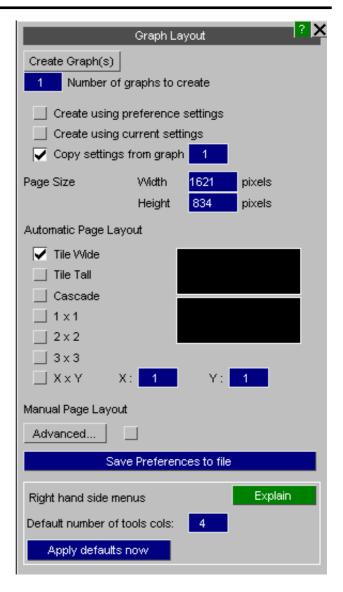

5.21 PROPERTIES

This menu can be used to display additional curves properties.

Minimum and maximum curve values can be highlighted for each curve and the value can also be displayed.

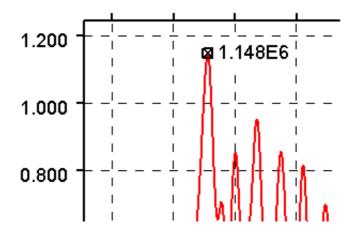


In addition to displaying the value on the curve the values can also be added automatically to the curve label in the graph legend.

Node 1343 (max=1.148E6)

5.21.1 Curves

Curves (Off)

This option will turn off the display of all minimum and maximum values.

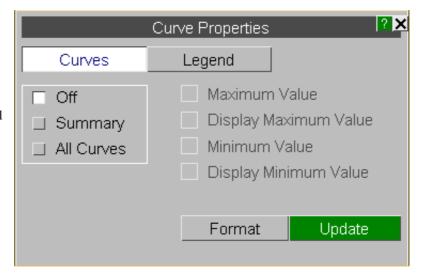

Curves (Summary)

This option will display a single minimum/maximum value from all curves currently displayed..

The following properties can be displayed

Maximum


value value with a cross

Display Display the maximum value

Minimum value Mark the minimum value with a cross

Display Display the minimum value with a cross


Mark the maximum

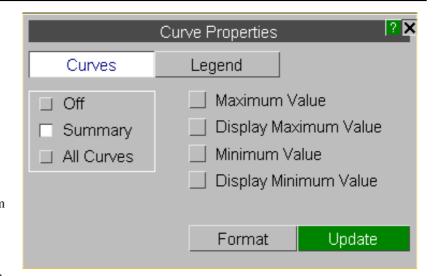


Curves (All curves)

This option can be used to select the properties that are displayed for each individual curve.

When this option is selected the display of injury criteria (HIC,HICd etc) for curves can also be selected.

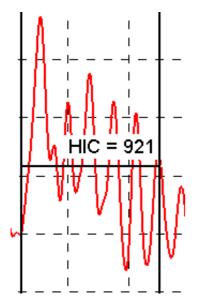

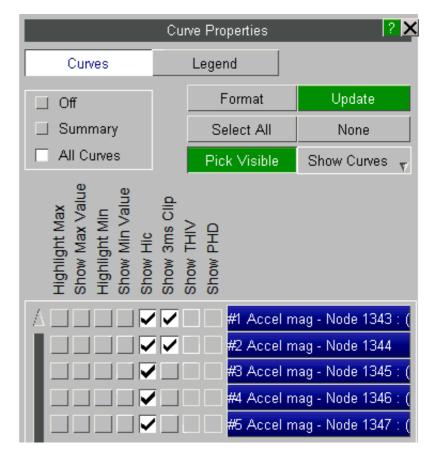

5.21.3 Format

This option can be used to control the display of the minimum/maximum values on the screen.

Text

The font, font size and colour of the values can be selected. Either a single colour can be used for all the values or the values for each curve can be coloured using the same colour as the curve.

Background

To make it easier to read the values a background can also be specified. In addition to specifying the background colour a transparency value can be used to control the visibility of curves under the text.

Border and Border Colour


Specify a border and border colour to be added around the value.

Connecting Line

This option will draw a line connecting the value with the point it relates to on the curve. The connecting line is drawn using the same colour as the border.

Value

The values can be displayed showing just the Y axis value or with both the X and Y axis values. If both values are displayed they can either be displayed separated by a comma or one above the other.

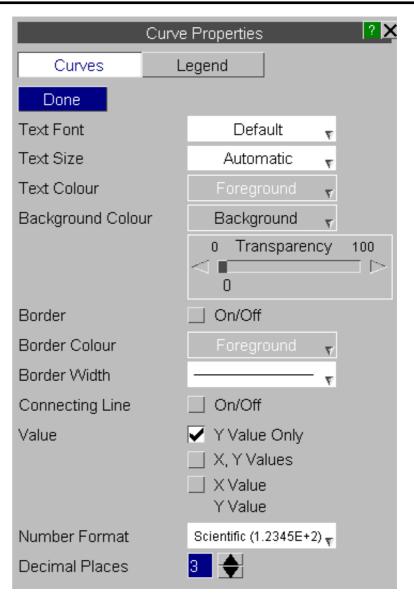

Number Format

The values can be displayed using 3 different formats

Automatic	Values are displayed using exponential format, all values are displayed as values of E0, E3, E6 etc.	
	e.g 11.234E+03	
Scientific	Values are displayed using exponential format.	
	e.g 1.123E+04	
General	Values are displayed as real numbers.	
	e.g 11234.000	

Decimal Places

In addition to specifying the format, the number of decimal places can also be set between 0 and 9.

5.21.3 Legend

This option can be used to automatically added curve properties to the curve labels in the legend area.

The following curve properties can be added to each curve label

Maximum value Minimum value Average value Injury Criteria (HIC, HICd etc)

Other options

Off Ti

Turns off the display of curve properties in the

legend


Append Add the values to

the same line as the curve labels in the legend

2nd Line Display the values using a second line for each curve in


the legend

The format of the numbers added to the curve labels is the same as that used to display values on the curves.

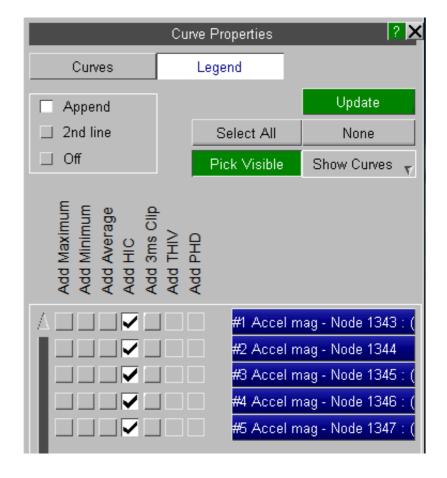

5.21.4 Positioning Values


By default T/HIS will automatically position minimum and maximum values to the right of the point they apply to.

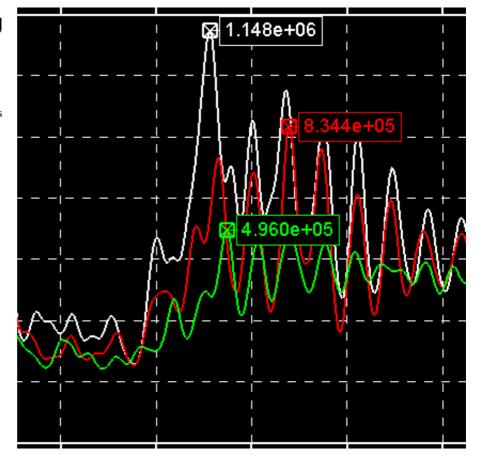

If the default location of the text obscures other curves then the position can be changed by clicking on the value with the left mouse button and then dragging the value to a new position.

If dynamic viewing is used to either zoom in or translate the curves after a value has been moved to a new position then it will maintain it's new position relative to the minimum/maximum value location.

As well as moving the minimum/maximum values the values used to display injury criteria like HIC and HIC(d) can also be moved.

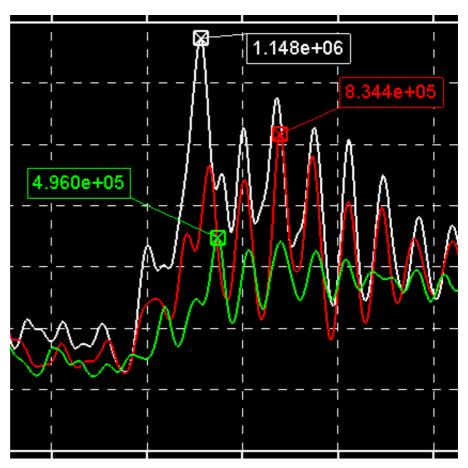

5.22 UNITS

From version 9.4 onwards T/HIS tries to keep track of the units for each curves X and Y axis. For every data component that T/HIS can read from an LS-DYNA results file one of the following basic units is stored for the curves X and Y axis.

Time	Rotation	Momentum	Energy Density
Energy	Rotational Velocity	Density	Mass Flow
Work	Rotational Acceleration	Stress	Frequency
Temperature	Length	Strain	Power
Displacement	Area	Force	Thermal Flux
Velocity	Volume	Moment	Force per unit width
Acceleration	Mass	Pressure	Moment per unit width
Viscosity	Thermal Diffusivity	Vorticity	Q Criterion
Current	Vector Potential	Magnetic Flux Vector	Electric Field Vector
Conductivity		-	

When a curve operation is carried out on curve which has either the X or Y axis unit defined the units for the output curve(s) are also calculated. If a curve operation is carried out using 2 or more input curves with different units and the result is a curve with inconsistent units then the units are set to zero

If one of the inputs is a constant then it assumed to be unitless.


Input 1	Input 2	Operation	Output
Velocity (m/s)	Velocity (m/s)	Add	Velocity (m/s)
Velocity (m/s)	Displacement (m)	Add	Unknown
Velocity (m/s)	Velocity (m/s)	Divide	Constant
Velocity (m/s)	Displacement (m)	Divide	Frequency (1/s)
Velocity (m/s)	Constant	Add	Velocity (m/s)
Velocity (m/s)	Constant	Divide	Velocity (m/s)
Velocity (m/s)	-	Differentiate	Acceleration (m/s^2)

5.22.1 Models

By keeping track of the X and Y axis units for each curve T/HIS can now convert results from one unit system to another.

For each model one of the following 6 unit systems can be defined.

Name	Units
U1	m, kg, seconds (SI)
U2	mm, Tonnes, seconds
U3	mm, kg, milli-seconds
U4	mm, gm, milli-seconds
U5	ft, slug, seconds
U6	m, Tonnes, seconds

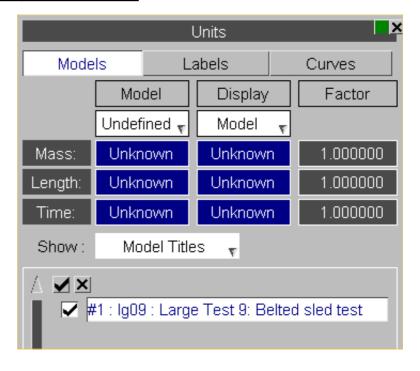


In addition to specifying a unit system for each model a separate unit system can also be selected to use to display results.


If the model unit system and the display unit system are different then T/HIS will automatically calculate the correct factors to apply to the X and Y axis as the curve data is read from the file (All curves are stored inside T/HIS using the currently defined Display unit system).

5.22.2 Labels

This option will display the labels that will be used for each of the built in units. Each Unit System has it's own set of labels which can be modified if required.

The default labels for each unit system are shown below.

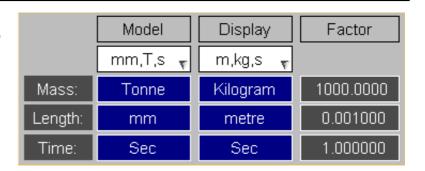

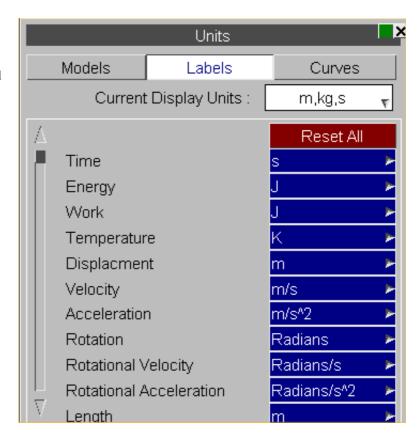


	hia i	шо т .	h10	h.,	115 6 -1	шо т .
	U1: m,kg,s	U2: mm,T,s	U3: mm,kg,ms		U5: ft,slug,s	U6: m,T,s
—				mm,gm,ms		_
Time	S Iı	S m l	ms ı	ms m.l	s ft lbf	S
Energy	μ	mJ	<u>μ</u>	ļ		kJ
Work	U	mJ	U		ft lbf	kJ
Temperature	K	K	K	K	K	K
Displacement	m	mm	mm		ft	m
Velocity	m/s	mm/s	mm/ms		ft/s	m/s
Acceleration	m/s^2	mm/s^2	mm/ms^2		ft/s^2	m/s^2
Rotation	Radians	Radians	Radians		Radians	Radians
Rotational Velocity	Radians/s	Radians/s	Radians/s	Radians/s	Radians/s	Radians/s
Rotational Acceleration	Radians/s^2	Radians/s^2	Radians/s^2		Radians/s^2	Radians/s^2
Length	m	mm	mm	mm	ft	m
Area	m^2	mm^2	mm^2	mm^2	sq ft	m^2
Volume	m^3	mm^3	mm^3	mm^3	cu ft	m^3
Mass	kg	Т	kg		slug	Т
Momentum	kg m/s	T mm/s	kg mm/ms	gm mm/ms	ft slug/s	T m/s
Density	kg/m^3	T/mm^3	kg/mm^3	gm/mm^3	slug/cu ft	T/m^3
Stress	N/m^2	N/mm^2	kN/mm^2	N/mm^2	lbf/sq ft	kN/m^2
Strain	-	-	-	-	_	_
Force	N	N	kN	N	lbf	kN
Moment	Nm	Nmm	kNmm		ft lbf	kNm
Pressure	N/m^2	N/mm^2	kN/mm^2	N/mm^2	lbf/sq ft	kN/m^2
Energy Density	J/m^3	mJ/mm^3	J/mm^3	mJ/mm^3	ft lbf/cu ft	kJ/mm^3
Mass FLow	kg/s	T/s	kg/ms	gm/ms	slug/s	T/s
Frequency	Hz	Hz	kHz	kHz	Hz	Hz
Power	W	mW	kW	W	ft lbf/s	kW
Thermal Flux	W/m^2	mW/mm^2	kW/mm^2	W/mm^2	lbf/ft	kW/m^2
Force per unit width	N/m	N/mm	kN/mm	N/mm	lbf/ft	kN/m
Moment per unit width	Nm/m	Nmm/mm	kNmm/mm	Nmm/mm	ft lbf/ft	kNm/m
Viscosity	kg/m s	T/mm s	kg/mm ms	gm/mm ms	slug/ft s	T/m s
Thermal Diffusivity	m^2/s	mm^2/s	mm^2/ms	mm^2/ms	ft^2/s	m^2/s
Vorticity	Radians/s	Radians/s	Radians/ms	Radians/ms	Radians/s	Radians/s
Q Criterion	1/s	1/s	1/ms	1/ms	1/s	1/s
Current	Α	Α	Α	Α	A	Α
Vector Potential	kg m/A s^2	T mm/A s^2	kg mm/A ms^2	gm mm/A ms^2		T m/A s^2
Magnetic Flux Vector	kg/A s^2	T/A s^2	kg/A ms^2	gm/A ms^2	slug/A s^2	T/A s^2
Electric Field Vector	kg m/A s^3	T mm/A s^3	kg mm/A ms^3	gm mm/A ms^3	slug ft/A s^3	T m/A s^3
Conductivity	A^2 s^3/kg m^3	A^2 s^3/T mm^3	A^2 ms^3/kg mm^3		A^2 s^3/slug ft^3	A^2 s^3/T m^3

If a curve has a user defined unit or if after a curve operation one of the curve axis units is not one of the basic units that T/HIS knows about then T/HIS will build a label from the currently defined length,mass,time,temperature and angle labels.


If for example a velocity/time curve is multiplied by another velocity time curve then the Y axis will have units of Velocity 2 . If the current display unit system is U1 (m,kg,seconds) then the unit label for the curves y axis will be "m 2 /s 2 ".

5.22.3 Curves

This option can be used to display the unit information for each curve.

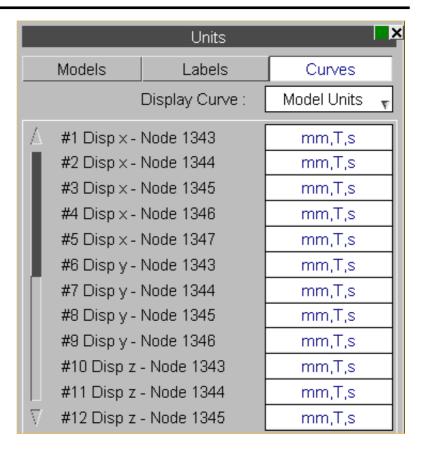


By default the unit system for each curve is displayed but his can be changed to show either the X or Y axis unit using the popup menu.

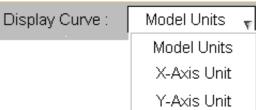

Setting the Unit System for a Curve

If the unit system for a curve has not been defined then it will be displayed as "Undefined" and a popup menu will be available that can be used to select the correct unit system. If the selected unit system is different to the unit system currently being used to display results then the curve values will automatically be converted to the current display unit system.

Note: Once the unit system for a curve has been defined it can not be changed.

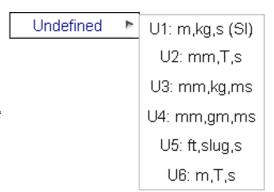


Setting the Axis Units for a Curve

The X and Y axis units of a curve can be defined or changed at any time. The popup menu contains all of the basic Unit types that T/HIS knows about plus an option to setup a user defined unit.

To create a user defined unit for a curve the unit should be defined in terms of it's basic properties. The values for **mass, length, time, angle, tempetrature** and **current** should be the powers that are used to describe the unit in terms of it's fundamental dimensions.

Some examples of common units defined using this method are shown below.

Unit	Mass	Length	Time	Angle	Temperature	Current
Time	0.0	0.0	1.0	0.0	0.0	0.0
Displacement	0.0	1.0	0.0	0.0	0.0	0.0
Velocity	0.0	1.0	-1.0	0.0	0.0	0.0
Acceleration	0.0	1.0	-2.0	0.0	0.0	0.0
Stress	1.0	-1.0	-2.0	0.0	0.0	0.0

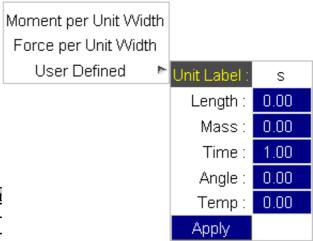

5.23 The Javascript Interface

5.23.1 Introduction

Javascript is a freely available scripting language that is normally found performing the "work" behind interactive web pages, however its syntax and structure also make it an excellent tool for providing an externally programmable interface to programmes in general.

Within T/HIS it is implemented as an Application Programming Interface (API) which provides a range of functions that allow you to edit and create curves, open windows, generate plots, and so on. This is written in a very simple and non-intimidating way, with relatively few functions, that should be easy for non-programmers to use.


Anyone familiar with C or shell script programming will find existing Javascripts are instantly readable, and can be given minor edits without further ado. For those who are more ambitious a good guide to the language is "**Javascript**, **A definitive Guide**" by David Flanagan, published by O'Reilly, ISBN 0596101996.

The sections below describe how to run Javascripts in T/HIS, and summarise its Javascript API. For details of the API and its functions, and also some examples, see the $\underline{\text{Appendix }J}$

5.23.2 Using Javascript in T/HIS.

Human-readable Javscripts need to be *compiled*, meaning turned from something human-readable into a set of instructions that a computer can understand; and then *run* in their compiled form. They can be changed and rerun in their modified form at any time without having to exit and re-enter T/HIS, making the "write, test, modify, re-test" development cycle very quick and easy.

5.23.2.1 Compiling and Running a script

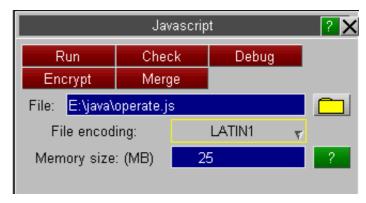

Run Will both compile and run the script unless it contains syntax errors, in which case it stops with an error message when compilation fails.

Check Only compiles the script, reporting any errors found, and does not run it.

Encrypt A script can be encrypted so that the source code is hidden but the script can still be run (when compiling and running the script T/HIS decrypts the file in memory). Once encrypted the source code cannot be retrieved by an ordinary user so make sure that you keep the original file somewhere safe. As a last resort contact OASYS Ltd who can decrypt the script if required.

If a script is split up into separate files by Use the files are all combined together into the main file before encrypting.

Merge If a script is split up into separate files by Use the files are all combined together into a single file. This may be useful if you want to give the script so someone else and you do not want to have to give lots of different files.

Debug Starts the JavaScript debugger, JaDe to debug the script.

Memory size is the memory allocated for garbage collection in the JavaScript engine. Please see the <u>garbage</u> collection section for more details.

5.23.2.2 File encodings for scripts

Version 10.0 of T/HIS introduced the ability for unicode text to be used on widgets created in a script. Previous versions of T/HIS only supported English text so the default ASCII encoding was used for script files (this is still the

default encoding for script files).

If you want to use unicode text in widgets then you must use a file encoding that is capable to representing the unicode 'chracters' you require. The **File encoding** popup allows you to change the file encoding used when reading the script file. T/HIS supports the following file encodings:

Encoding	Description
LATIN-1	Default 'ASCII' encoding
BIG5	Taiwan/Hong Kong (traditional)
EUC-CN	Extended unix code (Simplified Chinese)
EUC-JP	Extended unix code (Japanese)
EUC-KR	Extended unix code (Korean)
GB	Chinese (simplified)
GBK	Chinese
ISO-2022-CN	Chinese
ISO-2022-CN-EXT	Chinese (extended)
ISO-2022-JP	Japanese
ISO-2022-JP-2	Japanese (extended)
ISO-2022-KR	Korean
JOHAB	Korean
SHIFT-JIS	Japanese
UTF-8	Should NOT have a byte order mark (BOM).
UTF-16	Should have a byte order mark (BOM). If not present assumes big endian
UTF-16LE	Little endian with or without byte order mark (BOM)
UTF-16BE	Big endian with or without byte order mark (BOM)
UTF-32	Should have a byte order mark (BOM). If not present assumes big endian
UTF-32LE	Little endian with or without byte order mark (BOM)
UTF-32BE	Big endian with or without byte order mark (BOM)

Please contact Oasys Ltd if you have problems or require another encoding to be supported.

To show the unicode text the appropriate font must be used. This can be set using the preferences this*cjk_unix_font and this*cjk_windows_font.

5.23.2.3 Dealing with errors in scripts

Script errors come in two forms:

Syntax errors

Are mistakes of Javascript grammar or spelling, resulting in error messages during compilation.

These are easy to detect and correct since the line number and offending syntax are both described by the compiler. The script needs to be edited to correct the problem and then recompiled. Sometimes several iterations of the compile/edit cycle are required to eliminate all errors from a script.

Run-time errors

Are errors of context or logic in scripts that are syntactically correct, and thus have compiled, but which fail at some stage when being run.

A typical example of a run-time error is an attempt to divide a value by zero, yielding the illegal result infinity. More subtle errors involve passing an invalid value to a function, accessing an array subscript that is out of range, and so on.

The T/HIS Javascript API has been written in such a way that it handles "harmless" run-time errors by issuing a warning and continuing execution, but that more serious errors which could result in the wrong answers being generated issue an error message and terminate.

5.23.2.4 Setting the Garbage Collection Threshold Size

Memory size: (MB) 25 ?

(This is an advanced topic, and you don't need to understand it.)

JavaScripts execute inside a memory "arena", allocated dynamically from the operating system, which grows in size as storage is requested within the script. This growth occurs due to requests for "new" variables within the script and also when API functions allocate and return values and objects, and it is limited only by what the operating system can deliver.

The nature of JavaScript means that objects frequently become redundant, and it is wasteful not to reuse the storage that they occupy, therefore there is a "Garbage Collection" process running behind the scenes which periodically checks storage and releases that which is no longer needed. This process is automatic and hidden from the user, it just "happens".

However Garbage Collection is quite a CPU-hungry process, so it is only carried out periodically when a certain threshold is reached. This can sometimes be observed during script execution as a periodic "pause for thought", and if you are monitoring memory usage with a system tool you may see it drop during these pauses.

Clearly this threshold value must be large enough not to trigger excessively frequent (and costly) garbage collections, while at the same time not being so large that scripts build up large amounts of excess memory to the detriment of the rest of the programme.

The **Memory size** value in the JavaScript panel is the amount of memory allocated for garbage collection. Every time a new object, array, string or double precision number is used a garbage collection 'thing' is also allocated. The Memory size is the total memory for these 'garbage collection things', **NOT** the total memory for the script. The total memory for the script could be significantly higher than this value. e.g the memory required for a Model object could be several kbytes but the memory for the 'garbage collection thing' for the Model object will something like 10 bytes for a 64bit operating system.

When the memory used for garbage collection 'things' reaches a significant proportion of **Memory Size** (normally about 2/3) then garbage collection will take place to try to reclaim memory. If no memory can be reclaimed and the total memory used for garbage collection reaches **Memory size** then the script will terminate with an error.

If your script has to retain a large number of objects, arrays, strings etc in memory then you may have to increase the value for **Memory size**. This can also be done using the this*javascript_memory_size preference or adding a special memory comment at the top of the script.


To recap:

- This threshold does *not* limit the memory the script can use, that is limited only by the operating system.
- It sets the memory for Garbage Collection 'objects'.
- Scripts which allocate a lot of memory, and which exhibit frequent pauses, *may* run faster with a larger value.
- ... and finally:

If you don't understand this topic don't worry. Most scripts will run quite happily with the default value, and you can ignore this setting unless they appear to be struggling, in which case try raising it. (As good an approach as any is to keep on doubling this value until the script works, but don't use very large sizes unnecessarily.)

5.23.2.5 Assigning Javascripts to Shortcut Keys

If a script is to be run repeatedly it can be convenient to set up a short-cut to it. From within the JavaScript menu ths script can be assigned to one fo the 12 function keys, alternativly the JavaScript can be assigned to any key using the Shortcut menu.

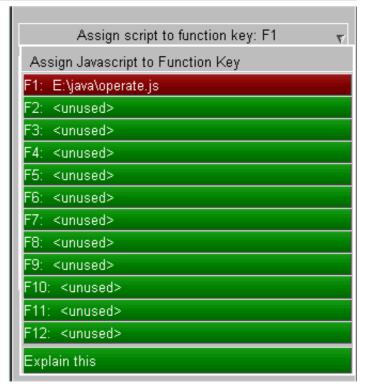

5.23.2.6 Maintaining a library of Javascripts


It is also convenient to have a library of scripts in a defined location.

By default T/HIS looks in **\$OA_INSTALL/this_library/scripts**, but you can define a different directory by setting the preference:

this*script_directory:
some different directory name

In the your oa_pref file.

All scripts found in the relevant directory will be listed in the Javascript panel, as shown in this example.

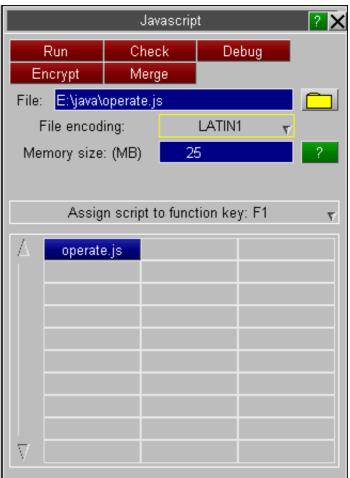

5.23.2.7 Using the "description:" comment at the top of a script to identify its purpose.

To help to identify scripts special comments are searched for in the top 10 lines of each script, and if description:

is found, for example the comment line:

```
// description: Some description of the script's purpose
```

Then the description line is shown as hover text when the mouse is placed over that filename. In the example above the "princ2d" script has the line

```
// description: Colour curve by model number
```

5.23.2.8 Using the "name:" comment at the top of a script to change its name

Normally the name shown for a script will be its filename, stripped of any leading pathname and trailing ".js" extension.

However if the string **name:** is found in the first ten lines of the script, then the following name will be used instead. For example the line:

```
// name: Colour By Model
```

Will result in the script appearing with the name "Colour By Model" in the Javascript panel. This does not affect the actual name of the script, only the name on its library button.

5.23.2.9 Using the "memory:" comment at the top of a script to change the required memory

Sometimes the memory required for garbage collection needs to be changed.

If the string **memory:** is found in the first ten lines of the script, then the size given will be used for the memory (unless the size in the memory textbox is larger than this value). For example the line:

```
// memory: 50
```

Will result in the script using 50Mb for garbage collection memory.

5.23.3 Running a Javascript in "batch" mode.

All the above assumes that Javascripts will be run interactively from the user interface, however it is also possible to run a script in "batch" mode using the command line interface. The relevant command-line commands are:

```
/JAVASCRIPT - +- COMPILE Compiles and checks the script, but does not run it.
+- EXECUTE (Re)compiles and runs the script
+- MEMORY <nnn> Resets the Garbage Collection threshold to <nnn> MBytes
```

To run a Javascript from batch these commands need to be placed in a command file and run using the command line "-cf=command filename" option. For example the command file might be:

```
... some other commands
/JAVA EXEC my_script.js
...some further commands
```

And the command line required to run T/HIS might be something like:

```
$OASYS/this10.exe -d=default -cf=command file -exit analysis name
```

Obviously multiple script invocations may be placed in a command file. For more information see:

<u>Command and Session files</u> Describes command files, and explains how to create and use them

T/HIS command line arguments Describes the various command line arguments, and how to use them

5.23.4 Running a Javascript from within a FAST-TCF script

JavaScripts can also be run from within a FAST-TCF script using the "javascript" option

```
javascript "E:\javascripts\new function.js"
```

Within a FAST-TCF script curves are usually accessed via curve tags. If a JavaScript is used within a FAST-TCF script it is recommended that the Curve.GetFromTag() function is used to access existing curves. If a new curve is created by a JavaScript within a FAST-TCF script then the new curve can be accessed within the FAST-TCF script using the "tag" parameter of the curve creation function

```
new curve = new Curve(id,tag,label,x-axis label,y-axis label);
```

If a tag is not specified in the curve creation function

```
new curve = new Curve(id);
```

then a curve tag will be generated automatically for the curve. The 1st curve created within the script will be tagged "curve_js_1", the 2nd "curve_js_2" ...

5.23.5 The T/HIS Javascript API

All of the T/HIS JavaScript API functions are described in detail in Appendix J.

5.23.6 Examples

By far the easiest way to learn Javascript is by example and, more specifically by modified existing scripts to do what you want.


The software comes supplied with examples in the <code>\$OASYS/programme_library/examples</code> directory (for T/HIS <code>\$OASYS/this_library/examples</code>) and you are free to use and modify these files for your own purposes.

5.24 Datum Lines

Datum lines can be added to graphs to show limits and reference curves. Unlike normal curves DATUM lines are not used to calculate graph limits when auto scaling and are not shown in the curve legend.

_	Read	Write	Curves	Models
Edit	t	Style	Properties	Images
Operate		Maths	Automotive	Seismic
Macros		FAST-TCF	Title/Axes	Display
Settings		Preferences	Groups	Graphs
Command File		Units	JavaScript	Datum

Each graph can contain multiple DATUM lines, all DATUM lines are drawn in the order they have been defined before any curves are plotted.

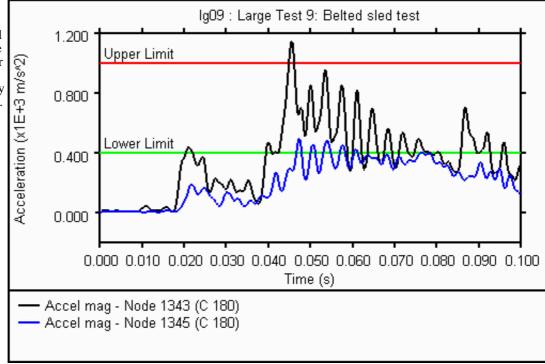


5.24.1 List


This option lists any DATUM line definitions that have been created.

This menu can also be used to select which DATUM lines appear on each graph. Each DATUM line can appear on more than one graph.

A range of DATUM lines can be added/removed from graphs by selecting the first line/graph combination and then holding down SHIFT while selecting the second line/graph.

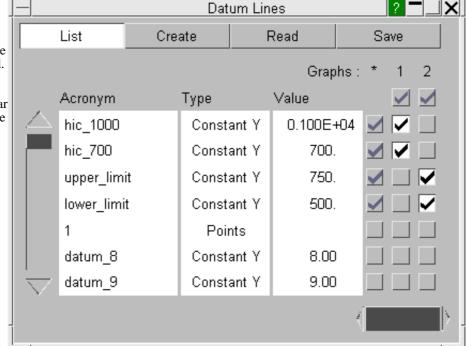

Clicking on any of the DATUM line definitions will highlight it in blue and display a popup menu containing the following options.

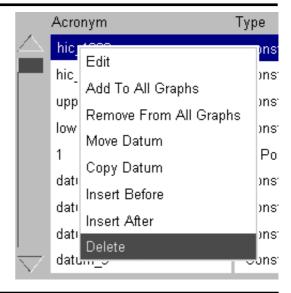

Edit	Edit the selected DATUM line definition. This option will display the CREATE/EDIT menu.
Add to All Graphs	Add the selected DATUM line definition to all the currently defined graphs
Remove From All Graphs	Remove the selected DATUM line definition from all the currently defined graphs
Move Datum	Make a copy of the selected DATUM line, the original definition will be deleted when the copy in inserted.
Copy Datum	Make a copy of the selected DATUM line.
Insert Before	Insert the previously copied/moved DATUM line definition before the selected DATUM line.
Insert After	Insert the previously copied/moved DATUM line definition after selected DATUM line.
Delete	This will delete the selected DATUM line.

5.24.2 Create/Edit

Each DATUM line must be defined with a unique acronym that is used to identify it in FAST-TCF scripts. The

acronym shouldn't contain any spaces.


An optional label that is displayed on the graph next to the DATUM line can also be defined. As well as defining the font, size and colour for the label the position of the label relative to the DATUM line can also be set.

DATUM lines can be defined as


- Constant Y values
- Constant Y2 values
- Constant X values
- Curves of X,Y points


For a constant X,Y or Y2 value the line will automatically extend to the edges of the graph and the areas either side of the line can be filled using any of the standard T/HIS colours.

If a DATUM line is defined using X,Y points then the areas between the curve and the graph axis can also be filled.

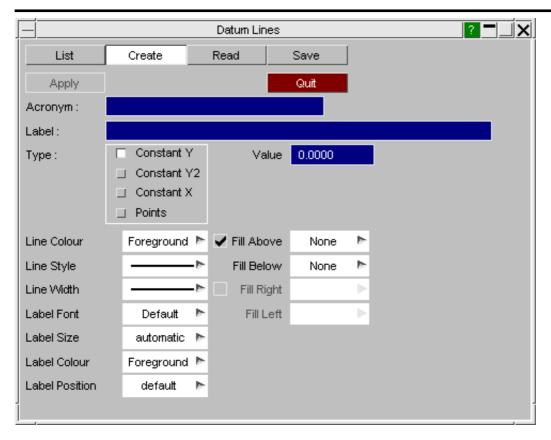

As the DATUM lines are drawn in the order they are defined then care must be taken when applying fill colours

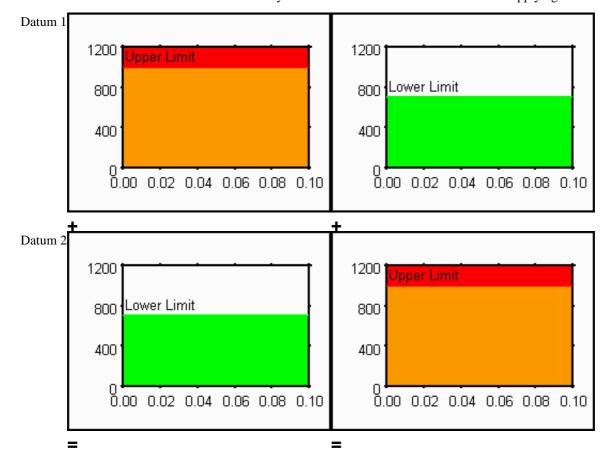

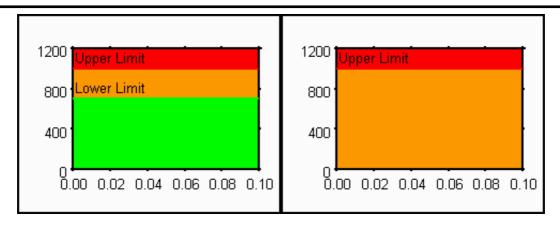


5.24.3 Read

This option can be used to read in a file containing DATUM line definitions that has previously been saved.

All DATUM lines must have a unique acronym. When the file is read the user has the choice to:

- Delete any existing DATUM line definitions before the file is read.
- 2. If a DATUM line in the file being read has the same acronym as an existing DATUM line then the existing definition will be overwritten.
- 3. If a DATUM line in the file being read has the same acronym as an existing DATUM line then the new definition in the file will be ignored.

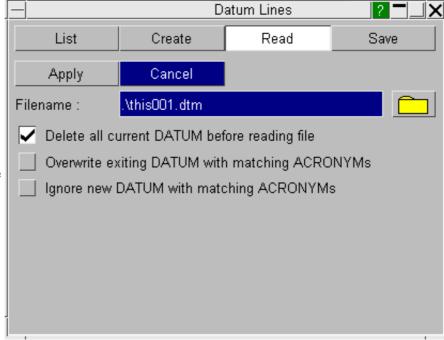


The preference option

this*datum file: C:\datum\this001.dtm

can also be used to define a default file containing DATUM line definitions that is read automatically when T/HIS starts (see Appendix H for more details)

5.24.4 Save

This option can be used to save any DATUM line definitions to a file so that they can be reloaded and used in future T/HIS sessions.

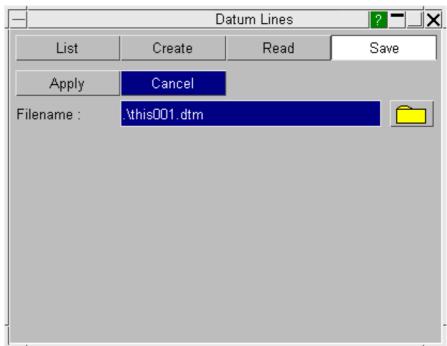

5.25 T/HIS Session Save and Retrieve

T/HIS session save and retrieve saves the current T/HIS session as a session file of format (.tsf) onto the disk which can be read back later on to retrieve the saved T/HIS session. A T/HIS session file can also appended to or overlayed on top of an existing session.

5.25.1 Save Session

A T/HIS session can be saved either through Save/Retrieve Session panel or on Exit.


5.25.1.1 Save Session - Save/Retrieve Session Panel

To save a T/HIS session, select *File -> Session File -> Save* to open *Save/Retrieve Session* panel in the menu area. Enter a name for the session file in the File Name text-box and click *Apply*. Filename can also be entered using file

selection browser

It should be noted that T/HIS session file does not directly store either the LS-DYNA model results or any csv/cur files that have been used for generating the curves inside the session file by default. It will only contain the full address path to these files. As a result of this session file do not occupy much space on disk.

If users want they can embed extra information into the session file so that the saved T/HIS session can be retrieved even if LS-DYNA results/csv/cur files are deleted or lost.

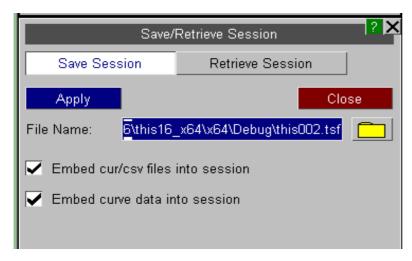

Embed cur/csv files into session This option embeds the cur or csv files that are used for creating the curves. The session file with embedded cur/csv files no longer depend on these files and the session can be retrieved even if these files are deleted or lost. If users want this option to be checked/turned-on always, they can change the preference file (see Appendix H for more details)

this*session_embed_cur_csv_files:

Embed curve data into session

This option embeds the curve xy coordinate data for all curves into the session file. A session file with embedded curve data can be retrieved even if the model files are missing. However, a session retrieved using embedded curve data loses informations such as curve-id and graph properties. If users want this option to checked/turned on always, they can change the preference file (see Appendix H for more details)

this*session embed curve data:

5.25.1.2 Save Session - On Exit


T/HIS session can be saved on exit from T/HIS by selecting *SAVE SESSION* button on the exit *INFORMATION* panel. The session file saved would have a name of the format this__.tsf. The file would be by saved to the location defined in preference file (see <u>Appendix H</u> for more details).

this*session_save_option:

this*session_save_dir:

The session file can also saved automatically every time T/HIS exits by defining in the preference file (see Appendix H for more details).

this*session auto save:

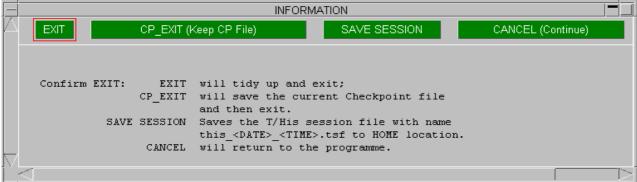

5.25.2 Retrieve Session

A session file (.tsf) that has been saved onto the disk can be opened by simply double-clicking on it.


To open a session file (.tsf) from inside T/HIS, select *File -> Session File -> Retrieve* to open *Save/Retrieve Session* panel in the menu area. Enter the name of the session file which needs to be opened in the File Name text-box and click *Apply*. The session file can also be selected using file selection browser. The retrieve session panel can pop-up on the screen ever time T/HIS is launched by defining in the preference file (see Appendix H for more details).

this*show session retrieve_on_start:

A typical T/HIS session can be retrieved in two possible ways depending on the data saved in session file:

- 1. Using LS-DYNA model(s), cur and csv files
- 2. Using embedded curve xy data

Note:An option to select either of the above types is provided only if the session file contains embedded curve xy data. By default session is retrieved using LS-DYNA model(s), cur and csv files option.

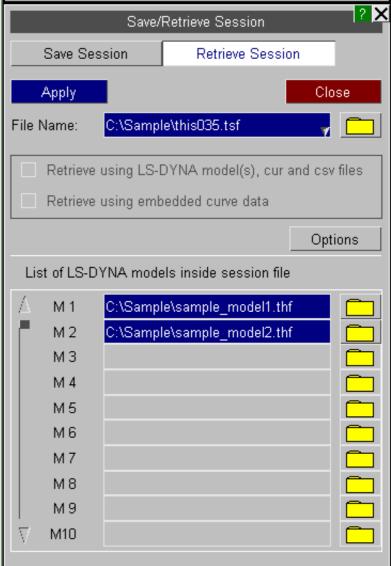

5.25.2.1 Using LS-DYNA model(s), cur and csv files

The session retrieved using LS-DYNA models, cur and csv files can restore all the curve information such as id, blanking status, curve history, curve and graph properties such as color, curve symbol, line width, line style and captions. This option needs LS-DYNA model(s), cur and csv files that are not embedded in the session files to be present in the locations defined inside the session.

If the session files uses any LS-DYNA models then the path of models used by the session file can be found in List of LS-DYNA models inside session file.


If the session file contains any model which is not found in the path defined inside the session file, the background color of the text-box turns

red from blue.

The path of the models used by the session files can be modified either by modifying the path of the file in the text-box or by select the file using the file selection browser.

A T/HIS session file can be opened even if some of the models are missing. The retrieved session will only contain the curves from the models that are present.


When trying to open a new session file with T/HIS already containing model(s) or curve(s), T/HIS session retrieve offers three different options:

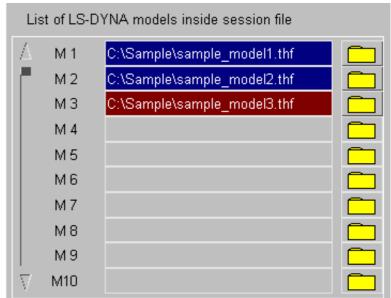

This option retains the current existing

session as it is and the graphs from the

session file will start from the highest available graph id. Total number graphs in the combined session is limited to 32.

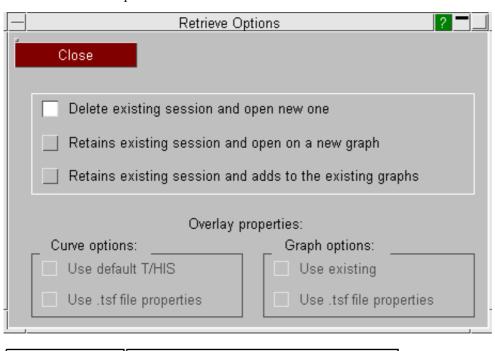

This option deletes the current existing session

new T/HIS session. It should noted that graphs

Retains existing session and open on a

and opens the selected session file as a fresh

and curves ones deleted can not be retrieved

unless they are saved.

new graph

(Append session)

Delete existing

open new one

session and


(New Session)

Retains existing session and adds to the existing graphs (Overlay session)

This option retains the current existing session as it is and the curves from session file will be added to their corresponding graph in the current session.

The above retrieve options can be set by clicking on the *Options* button in the *Save/Retrieve Session* panel. This button becomes available only if T/HIS already contains model(s) or curve(s). Clicking on this button will open up the Retrieve Options pop-up.


The Overlay Properties become available when Retains existing session and adds to the existing graphs option is selected. The overlay properties block will help in defining the curve style for the curves/graphs properties such as curve line type, width, graph title, x-axis and y-axis labels and font that are being overlaid on top of existing session the curve and graph.

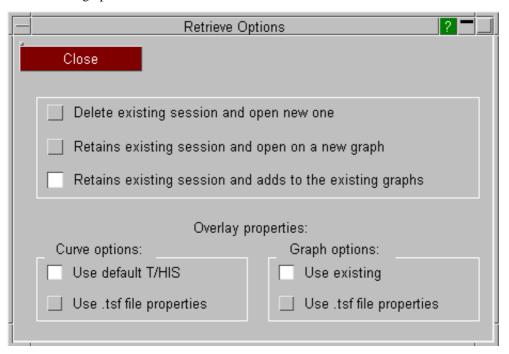

Overlay Curve Options	Use default T/HIS	This option automatically defines the curve style for the curves that are being overlaid.	
Options	Use .tsf file properties	For the curves that are being overlaid, this option will apply the curve style defined inside the session file (.tsf).	
	Overlay Graph Options	Use existing	This option will retain the current existing graph properties such as x-axis and y-axis labels and font as it is.
Use .tsf file properties		This option will apply the graph properties such as x-axis and y-axis labels and font as defined inside the session file (.tsf).	


5.25.2.2 Using embedded curve xy data

If the selected session file contains embedded curve xy data, the option to select retrieve using embedded curve data becomes available. This option retrieves all the curves even when the LS-DYNA model files required for session are missing/lost. However, the session retrieved using embedded curve xy data loses certain curve and graph properties. Hence, session option such as append and overlay are not applicable for a session retrieved using embedded curve data.

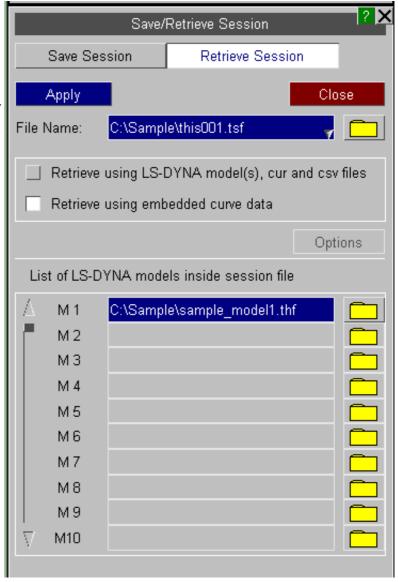

6 Other Options

6.1 Tool Bar



The tool bar is located across the top of the main T/HIS window and provides easy access to all of the main T/HIS menus from a series of drop down menus. In addition to the menus the drop down menus also allow a number of items to be changed dynamically and it provides a constant feedback of the cursor position within the graph area.

Each graph window contains its own tool bar that provides a subset of the functions in the main toolbar (see Section 6.2).

6.1.1 File

The File drop down menu can be used to access the following menus.

Read see Section 5.1 for more details. Write see Section 5.2 for more details. see Section 5.3 for more details. Curve

Manager

Model see Section 5.4 for more details.

Manager

see Section 5.5 for more details Edit

This option is only available on PC's and can be used to access Page Setup

the standard Windows Page Setup menu.

Print This option is only available on PC's and can be used to access

the standard Windows Print menu.

Manual Displays this manual.

6.1.2 Graphs

Options...


The Graphs drop down menu can be used to create new graphs and to change layout options.


Create Create a new graph, see Section 3.1 for more details.

> Modify graph layout options, see Section 3.1 for more details.

This option can be used to automatically hide the tool bar, Auto-hide graph tool bar

see Section 6.2, at the top of each graph window.

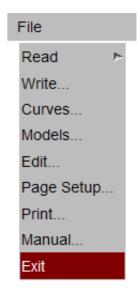



6.1.3 Plotting

The Plotting drop down menu can be used to access the following plotting commands.

Plot see Section 4.1 for more details.

Zoom see Section 4.5 for more details.

Point see Section 4.3 for more details.

Autoscale see Section 4.6 for more details.

Centre see Section 4.7 for more details.

6.1.4 Functions

The Functions drop down menu can be used to access all of the curve functions.

Automotive see Section 5.11 for more details.

Operate see Section 5.9 for more details.

Maths see Section 5.10 for more details.

Seismic see Section 5.12 for more details.

6.1.5 Display

The Display drop down menu can be used to access the Title/Axis and Display menus and to dynamically modify the appearance of graphs. This menu changes all of the currently active graphs (see Section 3.5).

Title/Axis see Section 5.15 for more details.

Legend see Section 5.15.5 for more details.

Display see Section 5.16 for more details.

Grid Turns the gird on/off, see Section 5.16.4 for more details.

Symbols Turns graph symbols on/off, see <u>Section 5.16.3</u> for more

details.

Lines Turns graph lines on/off, see Section 5.16.2 for more details.

Border Turns the plot border on/off, see <u>Section 5.16.6</u> for more

details.

Foreground Sets the foreground colour, see <u>Section 5.16.9</u> for more

details.

Background Sets the background colour, see <u>Section 5.16.8</u> for more

details.


Swaps the current foreground and background colours, see


Fore/Back Section 5.16.10 for more details.

Plot Format Set the current plot format, see Section 5.15.5.2 for more

details.

Plotting
Plot
Zoom
Point
Autoscale
Centre



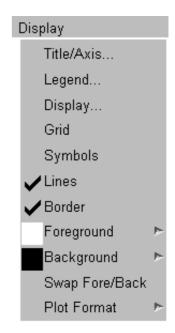

6.1.6 Images

The Images drop down menu can be used to save the current displayed graphs as an image in a number of formats. In addition to saving an image this menu can also be used to read in an image that is used as the background for each graph.

BMP, JPEG... Capture the image as a bitmap or JPEG, see $\underline{\text{Section } 5.8.1}$ for more details.

Generate a Postscript or PDF image, see Section 5.8.2 for more Postscript

details.

This option can be used to set an image as the background for each graph, see $\underline{\text{Section } 5.8.3}$ for more details. Background

Images

BMP, JPEG ... Postscript Background

6.1.7 Options

The Options drop down menu can be used to access all the following functions.

Command File see Section 5.7 for more details.

Settings Change data sources and other settings, see <u>Section 5.17</u> for

more details.

FAST-TCF Generate/playback FAST-TCF scripts, see Section 5.14 for

more details.

Convert a LSDA binout file to ASCII, see Section 5.4.4 for

LSDA>ASCII more details.

Edit Displays the preference editor, see <u>Section 6.6</u> for more

Preferences detail

Menu Modify menu fonts, size and colours, see Section 6.1.7.1 for

Attributes more details.

Auto Update Turn on/off automatic update.

Show Model Turn the model prefix on/off or set it to automatic, see

Prefix <u>Section 5.15.5.1</u> for more details.

Prefix Format Select the prefix format displayed for each model.

This option can be used to set the format used for the curve

prefix. This option has 4 settings

Model Number	The model number will be used as the prefix. e.g (M1)	
Directory	The directory name the model was read from will be used at the prefix. e.g. (/run1)	
THF File	The root name of the THF file will be used as the prefix. e.g (sled_test)	
User Defined	A used defined prefix will be used. The prefix can be defined on a model by model case using the Model Menu.	

Drag with curves

Turn on/off the display of curves when dragging axis borders and legends. On some slow machines the time taken to update the display when a large number of curves is displayed makes the dragging response too slow. This option will automatically turn off the display of curves while the dragging operation is active.

Shortcuts Setup keyboard shortcuts for commonly used function, see

section $\underline{6.5}$ for more details.

Options

Command File

Settings

FAST-TCF

Convert LSDA->ASCII

Edit Preferences

Menu Attributes

Auto Update

(A) Show Model Prefix


Prefix Format

Drag with curves

Shortcuts

6.1.7.1 MENU Attributes

This panel allows you to tune the visual attributes of the screen menus within T/HIS and save them if you wish.

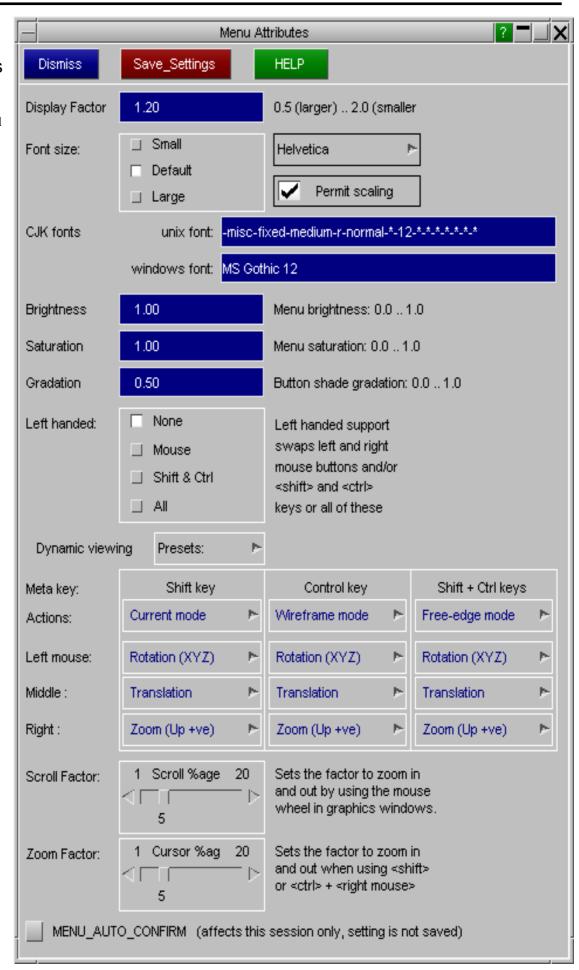


Display Factor

Lies in the range 0.5 to 2.0, default 1.0. Values < 1.0 reduce the apparent size of the screen so that menus and text become larger. Values > 1.0 act in the opposite sense. This is the simplest way of taking into account the display size.

Font Size

Sets the font size independently of the display scale, face which can be useful on wide-screen displays. The font typeface can also be changed.



Font scaling

By default text in menu interface buttons can be scaled downwards to a smaller font size (if one exists) if it is too long for the button. This shows more characters, but it can look messy when the user interface has a mixture of font sizes. Turning font scaling off prevents this happening, giving a more consistent appearance. (However it is generally better to adjust the Display Factor in order to find a menu scale that gives consistent font sizes.)

Brightness

Lies in the range 0.0 to 1.0, default 1.0. Controls the brightness of the menu interface only (it will not affect displayed graphics).

Saturation

Lies in the range 0.0 to 1.0, default 1.0. Controls the colour saturation of the menu interface. (Again it will not affect displayed graphics.)

Left Handed

The software uses mouse buttons and keyboard 'meta settings keys (<shift> & <control>) in a handed way that is set up by default for right-handed use. It is possible to configure either or both for left-handed use.

Save Settings

Once you have adjusted the above to your taste you can save these settings in your 'oa_pref' file for future use with the **Save_Settings** button. If you do not save settings they will be lost when this session exits.


6.1.8 Quick Pick

The Quick Pick menu can be used to perform many common curve operations using just the mouse. The current "Quick Pick" mode is displayed on the tool bar and can be changed using the popup menu.

The current "Quick Pick" option can be applied to a single curve by selecting the curve using the left mouse button. Multiple curves can be selected by holding down the left mouse button and dragging out an area.

Some functions can be undone using the middle mouse button.



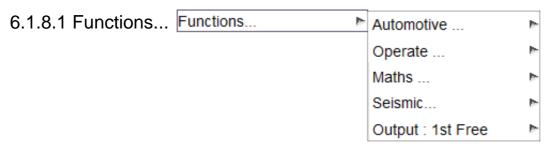

Blank

This option can be used to select any of the curve operations (see Sections $\underline{5.9}$, $\underline{5.10}$, $\underline{5.11}$ and $\underline{5.12}$) that have a single curve as input. In addition to selecting a curve operation this menu can also be used to set the output curve for the curve operation to either the 1st free curve or to overwrite the input curve.

This option can be applied to multiple curves but it can not be undone.



This option can be used to blank curves. The selected curves can be blanked in just the graph they were selected in, all the currently active graphs or all graphs.

This option can be applied to multiple curves and it can be undone using the middle mouse button.



This option can be used to unblank curves. The selected curves can be unblanked in all the currently active graphs, all graphs or a individual graph can be specified.

This option can be applied to multiple curves and it can be undone using the middle mouse button.



This option can be used to blank all curves except for the selected ones. The selection can be applied to just the graph they were selected in, all the currently active graphs or all graphs.

This option can be applied to multiple curves and it can be undone using the middle mouse button.

6.1.8.5 Delete

This option can be used to delete curves. It can be applied to multiple curves but it can not be undone.

6.1.8.6 Properties...

This option will display the current properties for a curve (see Section 6.3.1 for more details). If multiple curves are selected this option is only applied to the one with the lowest curve ID.

6.1.8.7 History...

This option can be used to view and edit the history of operations used to create a curve (see <u>Section 6.4</u> for more details).

6.1.8.8 Edit...

This option can be used to select a curve for editing (see Section 5.5 for more details). If multiple curves are selected this option is only applied to the one with the lowest curve ID.

6.1.8.9 Edit Labels...

This option can be used to edit the label, title and axis labels for a curve (see <u>Section 6.3.2</u> for more details). If multiple curves are selected this option is only applied to the one with the lowest curve <u>ID</u>.

6.1.8.10 Colours...

This option can be used to change the colour of curves. This option can be applied to multiple curves and it can be undone using the middle mouse button.

6.1.8.11 Line Width...

This option can be used to change the line width of curves. This option can be applied to multiple curves and it can be undone using the middle mouse button.

6.1.8.12 Line Style...

This option can be used to change the line style of curves. This option can be applied to multiple curves and it can be undone using the middle mouse button.

6.1.8.13 Symbols...

This option can be used to change the symbol style of curves. This option can be applied to multiple curves and it can be undone using the middle mouse button.

6.1.8.14 Edit Curve in PRIMER...

This option can be used to send the load curves in the linked session of PRIMER, see Section 6.7 for more details.

6.1.8.15 Edit Entity in PRIMER...

This option can be used to send the curve entities in the linked session of PRIMER, see <u>Section 6.7</u> for more details.

6.2 Graph Tool Bar



6.2.1 Graph Selection

This option can be used to make a graph active or inactive, see Section 3.5 for more details.

6.2.2 Plotting

Plotting

This option provided the same functions as the <u>Plotting</u> menu in the main toolbar with the exception that the settings only apply to the graph in the window instead of all of the currently active graphs.

6.2.3 Display

Display


This option provided the same functions as the $\underline{\text{Display}}$ menu in the main toolbar with the exception that the settings only apply to the graph in the window instead of all of the currently active graphs.

6.2.4 Auto_Blank

The **Auto_Blank** function can be used to blank and unblank curves in a graph using either the TAB key or SHIFT+TAB.

By default if you now press the TAB key in a graph T/HIS will automatically blank all the curves except for those belonging to model 1. If you press TAB a 2nd time you will just see the curve belonging to model 2, a third time model 3. When you reach the end of the models you have curves for pressing the TAB key loops back to model 1. If you press SHIFT+TAB then it goes the other way (model 3 > model 2 > model 1 > model 3)

Instead of blanking curves by model the behaviour of the TAB key can be changed.

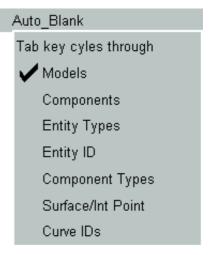

Models Default. Blanks curves by model ID. Blanks curves by component. e.g Node X Displacement > Node Y Displacement > Node Z **Components** Displacement > ... **Entity Types** Blanks curves by entity type e.g. Whole Model > Parts > Nodes > Solids > ... **Entity ID** Blanks curves by ID. e.g Node 1 and Solid 1 > Node 2 and Solid $2 > \dots$ Component This is similar to Component except that it lumps all the displacement curves together then velocity so you get x,y,z and magnitudes. You will also get data for different entity types. So **Types** Energy would show things like Whole Model KE and Contact Energies. Surface/Int Blanks curves by surface or through thickness integration point. e.g Top > Middle > Bottom > **Point** Layer $1 > \dots$ **Curves ID's** Blanks curves by ID

The default **Auto_Blank** mode can be modified using the preference file (see Appendix H for more details)

this*auto_blank_mode:

6.2.5 AB

This option can be used to turn and off the Auto Blank option. The default setting for this option can be modified using the preference file (see <u>Appendix H</u> for more details) this*auto_blank:

6.3 CURVE INFORMATION

Pressing the right mouse button while in the graphics window will display a popup menu listing the ID, label and the data source of the nearest curve.

When data is read from either one of the LS-DYNA output files T/HIS will store the ID and type of the entity that the data applies to. If the curve label is modified this data will remain unchanged so that the curve source can still be identified.

If a curve has been read in from another source then T/HIS will report the data source as being UNKNOWN

If a curve is created from another curve using one of the T/HIS curve operations then the data source for the new curve will be copied from the original curve. If the operation uses more than one curve as input then the data source information will only be copied to the new curve if all of the input curves had the same data source.

Edit will open the curve editor for the selected curve whilst the colour, Line Width, Line style and Symbol pop-up menus allow the user to change these options for the curve (as can be done from the **STYLE** menu).

Model ID: #1 NODE: 1343 Disp x - Node 1343 : (Pelvis) Functions... Blank... Unblank... Only... Save as... Delete Properties... History Units... Edit... Edit Labels... Colour... Line Width... Line Style... Symbol... Dismiss

6.3.1 Properties...

This option displays a number of properties for a curve including minimum and maximum values, average and RMS value.

Xmin	0.0000000	
Xmax	0.0998993	
Ymin	0.0000000	@ X = 0.0000000
Ymax	1217170.8	@ X = 0.0479982
RMS	343394.38	
Average	271682.56	

6.3.2 Edit Labels...

This option can be used to change the title, tag, line label and axis labels for a curve.

Line Label Accel mag - Node 1348

Title LG09 : LARGE TEST 9: BELTED SLE

X-Axis Time

Y-Axis Acceleration

Tag

Apply

Automotive ...

Operate ...

Maths ...

6.3.3 Functions...

The functions popup menu can be used to access any of the curve operations that take a single curve as the only input. As well as applying an operation to a curve this menu can also be used to select between.

- Overwriting the input curve with the output from each function

 Output: 1st Free
- Writing the output to the 1st unused curve


6.4 Curve Histories ...

Internally T/HIS knows about all of the operations used to create a curve and the order that the operations were applied. In addition to knowing the operations used to create each curve T/HIS also knows which curves were used as inputs to operations that created other curves.


6.4.1 Viewing

When a curve is selected and the curve history is displayed a floating window will be displayed that shows all of the operations used to create a curve.


In the example opposite 3 items were read in and then combined using the **VEC**tor operation.

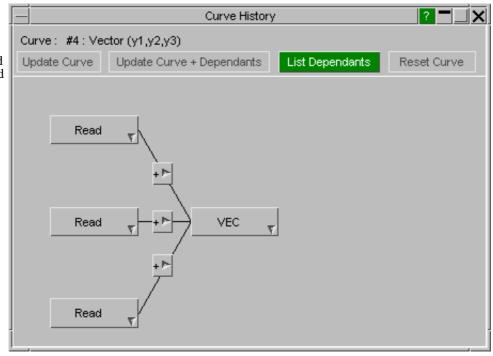

More information on each part of the curve history can be obtained by moving the mouse across each operation.

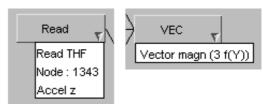

If a curve operation has one or more inputs that are not curves then the hover text will display all of the inputs along with their values.




6.4.2 Modifying


As well as viewing the operations used to create a curve the operations can also be modified by right clicking on them.

For a **READ** operation, the entity ID can be changed to any other ID of the same entity type. T/HIS will automatically check if results are available for the new ID and display a warning if they are not.

As well as changing the entity ID the data component can also be modified by selecting a different component in the popup menu.

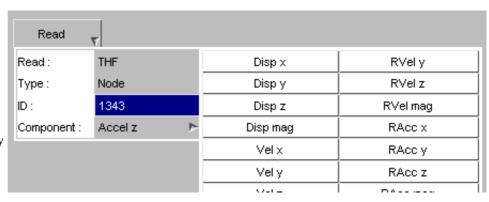


If a curve operation has one or more inputs that are not curves then right clicking on the operation will display a popup menu that will allow all of the values to be modified.



As well as changing the inputs to existing curve operations it is also possible to change a curve operation to any other curve operation that has the same number of input curves.

Right clicking on the popup symbol next to the name of the current curve operation will display a menu containing a list of all of the curve operations that are available which have the same number of input curves.


If for example the current curve operation is **CLIP** then the popup menu of available operations will contain all of the other curve functions that have a single input curve.

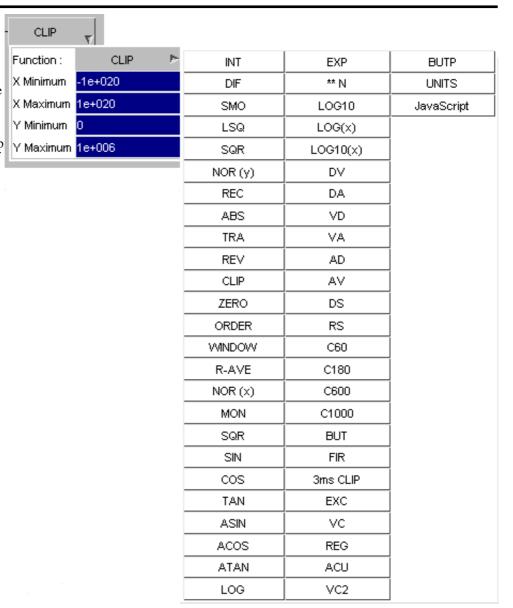

6.4.3 Inserting New Operations

.New operations can be inserted into the chain of curve operations by right-clicking on one of the + symbols between the existing operations.

The popup menu that is displayed will contain all of the curve operations that take a single curve as input and produce a single output curve.



ADD (y)	SQR	BUT
ADD (x)	SIN	FIR
SUB (y)	cos	3ms CLIP
SUB (x)	TAN	EXC
MUL (y)	ASIN	VC
MUL (x)	ACOS	REG
DIV (y)	ATAN	ACU
DIV (x)	LOG	VC2
INT	EXP	BUTP
DIF	** N	UNITS
SMO	LOG10	JavaScript
LSQ	LOG(x)	
SQR	LOG10(x)	
NOR (y)	DV	
REC	DA	
ABS	VD	
TRA	VA	
REV	AD	
CLIP	AV	
ZERO	DS	
ORDER	RS	
WINDOW	C60	
R-AVE	C180	
NOR (x)	C600	
MON	C1000	

6.4.4 Update Curve

Update Curve

.If any of the operations used to create a curve are modified or if a new operation is inserted then this option can be used to automatically update the curve. T/HIS will automatically rebuild the curve using the updated set of curve operations and will replace the old curve with the new one.

6.4.5 Update Curve + Dependants

Update Curve + Dependants

This option will update the selected curve and any dependant curves. As T/HIS stores all of the operations used to create every curve it knows if a curve has been used as an input to any other curves.

The selected curve will be automatically rebuilt and replaced with the new curve and then any curves that use the selected curve as an input will also be rebuilt and replaced.

6.4.6 List Dependants

List Dependants

This option will display a list containing any curves that have been created which use the currently selected curve as an input somewhere in their chain of curve operations.

6.4.7 Reset Curve

Reset Curve

This option can be used to reset all of the curve operations used to create a curve if any of them have been modified.

6.5 Keyboard Shortcuts


Some panels and actions can be accessed through pre-programmed shortcuts and from version 9.4 onwards the keys they are assigned to are customizable.


From version 9.4 onwards a number of new pre-programmed shortcuts have been added, including the top menu panels and window layout options. In addition to these pre-programmed shortcuts Macros and FAST-TCF scripts can also be assigned to a key.

A listing of the available shortcuts and the keys they are assigned to can be brought up by pressing the '?' key (by default) or accessing it through the Options top menu.

This will bring up a panel, from which you may assign the shortcuts, Macros and FAST-TCF scripts to the keys. Note that upper and lower case letters can be assigned different shortcuts.

A list of all the available pre-programmed shortcuts is given at the end of this section with their default key(s) if assigned.

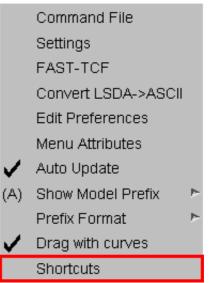

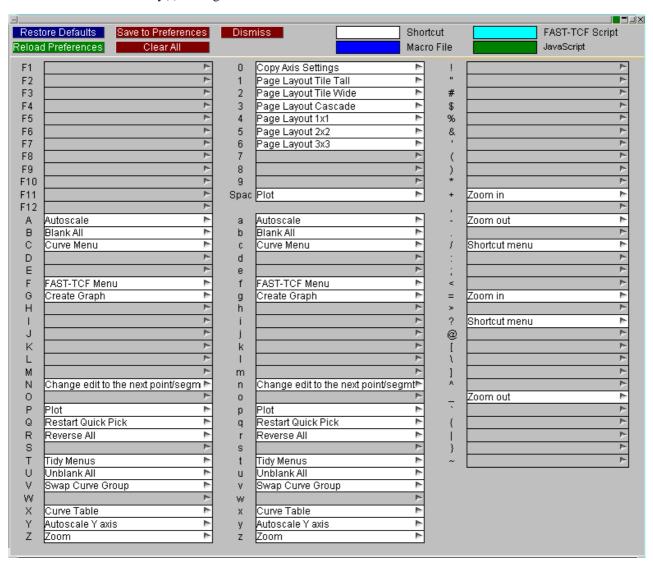

At the top of the panel you will see the following buttons.

Restore Defaults

Restores the shortcuts to their default keys, removing any shortcuts assigned by the user.

Save to Preferences

Saves the shortcuts to the oa_pref file in the home directory. They are saved in the format "this*A_key: AUTOSCALE" where the first part defines which key the shortcut is assigned to and the second part is the shortcut being assigned. Each shortcut has a specific name to use in the oa_pref file, and a list is given below.

When T/HIS is started this is read and the saved shortcuts are restored.


Reload Preferences

Reloads the shortcuts from the oa_pref file in the home directory.

Clear All


Clears all the shortcuts on the panel.

To assign a shortcut, right click on the key you want to assign it to. This will bring up a list of all available shortcuts in T/HIS as well as the option to assign Macros or FAST-TCF scripts.

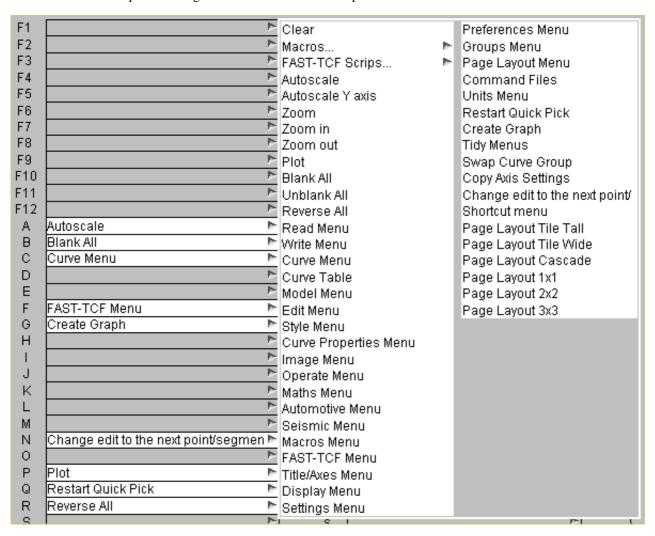


To assign a Macros, FAST-TCF script or JavaScript a to a key, right click on "Macros...", "FAST-TCF Scripts..." or "JavaScripts".

This will bring up another popup from which you can select the Macro or FAST-TCF script. The popup will contain a list of Scripts that T/HIS has picked up from the \$OASYS and home directory. If the script you want is not in this list you can browse for it by clicking on the folder icon.



The listing of assigned keys is colour coded to easily distinguish between pre-programmed shortcuts (white), FAST-TCF scripts (light-blue), Macros (dark-blue) and JavaScripts (dark-green)



Pre-programmed Shortcuts: Defaults shown in bold, oa_pref name shown in brackets

View Controls			
A/a - Autoscale (AUTOSCALE)	Autoscale Y axis (Y_AUTOSCALE)		
P/p - Plot (PLOT)	[SPACE] - Plot (PLOT)		
z/z - Zoom (ZOOM)	"+"/"=" - Zoom in (ZOOM_IN)		
"-"/"_" - Zoom out (ZOOM_OUT)			
Blanking			
B/b - Blank All (BLANK)	R/r - Reverse curve blanking (REVERSE)		
U/u - Unblank all curves (UNBLANK)			
Menus			
Automotive Menu (AUTOMOTIVE_MENU)	Command Files Menu (CFILE_MENU)		
C/c - Curve Menu (CURVE_MENU)	Curve Properties Menu (PROP_MENU)		
Curve Table (CURVE_TABLE)	Display Menu (DISPLAY_MENU)		
Edit Menu (EDIT_MENU)	Groups Menu (GROUPS_MENU)		
Image Menu (IMAGE_MENU)	F/f - FAST-TCF Menu (FAST_TCF_MENU)		
Macros Menu (MACROS_MENU)	Maths Menu (MATHS_MENU)		
Model Menu (MODEL_MENU)	Operate Menu (OPERATE_MENU)		
Page Layout Menu (PAGE_MENU)	Preferences Menu (PREF_MENU)		
Read Menu (READ_MENU)	Shortcut Menu (SHORTCUT)		
Seismic Menu (SEISMIC_MENU)	Settings Menu (SETTINGS_MENU)		
Style Menu (STYLE_MENU)	Title/Axes Menu (TITLE_MENU)		
Units Menu (UNITS_MENU)	Write Menu (WRITE_MENU)		

Page Layout	
1 - Page Layout Tile Tall (TILE_TALL)	2 - Page Layout Tile Wide (TILE_WIDE)
3 - Page Layout Tile Cascade (CASCADE)	4 - Page Layout Tile 1x1 (LAYOUT_1X1)
5 - Page Layout Tile 2x2 (LAYOUT_2X2)	6 - Page Layout Tile 3x3 (LAYOUT_3X3)
Miscellaneous	
G/g - Create a new graph Window (NEW_WINDOW)	T/t - Tidy Menus (TIDY_MENUS)
V/v - Change Curve Picking Group (CURVE_GROUP)	Q/q - Swap to Quick Pick (QUICK_PICK)
PAGE UP - Next Page	PAGE DOWN - Previous Page
HOME - First Page	END - Last Page
Change edit to next point (EDIT_NEXT)	0 - Copy Axis Settings (COPY_AXIS)

6.6 Preferences


The Preference menu provides an interactive editor for setting options for T/HIS in the oa_pref preference file (see Appendix H for more details on the oa_pref file/options)

The preferences editor reads an XML file that contains all possible preferences and their valid options, and allows you to change them at will. In this example the user is changing the background colour in T/HIS.

Note that changes made in the Preferences editor will not affect the current session of T/HIS, they will only take effect the next time it is run.

If you have write permission on the oa_pref file in the \$OASYS directory you will be asked if you want to update that file, otherwise you will only be given the option of updating your own file in your \$HOME / \$USERPROFILE directory.

For more information on the interactive preference editor see Appendix H.

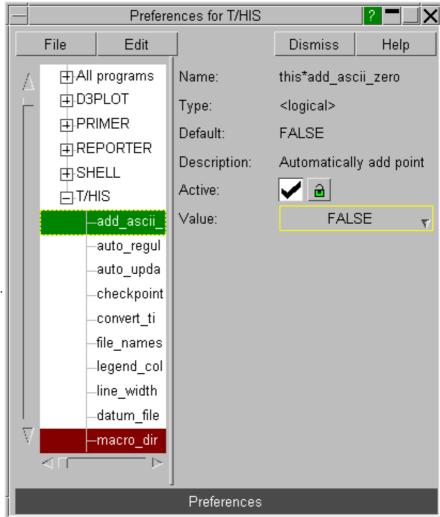

6.6.1 Save Preferences Popup


The Save Preferences menu allows a means to quickly save graph properties straight to the oa_pref file.

The popup works by reading the graph (defaults to Graph 1) properties to take preferences from. When a save button is pressed (Title, X Axis, Y Axis etc..), the menu will look for changes to the relevant preferences and print those preferences to the oa_pref file.

For example, by pressing on "Display" it will save (most of) the options setup in the Display menu from the specified graph into your oa_pref file.

Note that if a preference is a default value then it will not print this preference to the oa_pref file so that your oa_pref file will not be cluttered with redundant preferences. An exception to this rule are with some of the preferences associated with the "Global Preferences" button.

This is located on the Display, Title/Axes and Graphs menus.

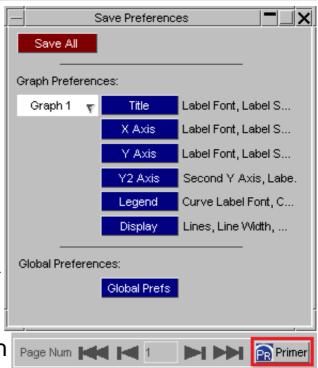

6.7 PRIMER: Sychronising with Page Num | 1

From version 15 onwards T/HIS can be synchronised with PRIMER using a shared memory link. This means that a post-processing model that is open in T/HIS can have its corresponding keyword file open in PRIMER, and information can be exchanged between the two codes.

By default no link takes place, but it can be opened in any of the following ways:

- A running T/HIS session starts a new PRIMER session using the stipulated model.
- A running PRIMER session starts a new T/HIS session using the stipulated model.
 and
- Once a link is established, in either of the modes above, further models can be opened and linked at will.

The link is symmetrical and bid-directional, with no concept of parent or child, and it can be closed at any time leaving both codes running autonomously. What you *can't* do at present is to link an autonomous, already running, T/HIS or PRIMER session with another autonomous session.

6.7.1 The PRE panel

When running linked with PRIMER the Pre panel (invoked by pressing the PRIMER button) shows the current status of the link. In this example we have four models open in T/HIS, and in this example:

- Models 1 and 2 are currently open in PRIMER
- Model 3 is not open in PRIMER, but a keyword file has been found automatically.
- Model 4 is also not open in PRIMER, and T/HIS has not found a keyword file automatically/

The file open/close options are

	Status of model	Action performed
Add to PRIMER		T/HIS has found a keyword file automatically, add this model to PRIMER
Find KVV file		T/HIS cannot find a keyword file, browse for a filename manually
Disconnect		Model is linked with PRIMER session, disconnect it

There is a corresponding Post panel in PRIMER, with the same layout and functionality.

Effects of linking and unlinking models:In all cases:

- Linking or disconnecting a model does not affect that model's status in either programme, both T/HIS and PRIMER will continue to run normally.
- Models may be disconnected and reconnected at will.
- When a model is deleted in T/HIS it is implicitly disconnected in PRIMER, but will not be deleted from PRIMER. Similarly, if a model is deleted in PRIMER is will be disconnected from T/HIS, but not deleted.
- The link logic attempts to keep model numbers the same in both PRIMER and T/HIS, however it is possible to defeat this by opening additional models in one programme but not the other. Doing so may cause the linkage to fail in some respects (so don't do it!)


The PRE panel can be opened or closed at will without affecting the status of linked models, it simply provides feedback about the current status and attributes of linked models.

6.7.2 Synchronising Operations

Load curves and data can be exchanged across the link using the following methods. Like other <u>Quick Pick</u> commands this may be set as the current operations, or selected from a menu of choices (as shown here) in response to a right click



Edit Load Curve in PRIMER

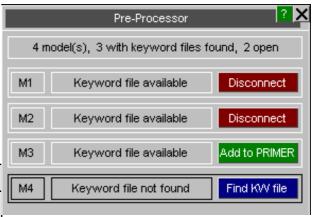

PRIMER session. ☐ CURVE Autoscale Xmin 0.0 Xmax 99776E-3 White Bgd. Text edit Abort Create Reset All ☐ CURVE_SMOOTH Edit (drag) √ Sketch ☐ CURVE_FUNCTION Plot DYN Incl scale & offs □ CURVE_FLC neck Defn Symbols ☐ CURVE_DUPLICATE Include: M1 <Master file> T/HIS 📆 □ FUNCTION □ FUNCTION_TABULATED LCID SEA SFO OFFA OFFO DATTYP LCINT Create DEFINE CURVE (model 1) SIDR Title Disp x - Node 3108 Point X value Y value 1.2 1.05 1.99373E-5 1.90735E-5 3.98746E-5 -1.5259E-5 0.9 5.98117E-5 8.01086E-5 7.97491E-5 4.95911E-5 0.759.96863E-5 -2.2125E-4 0.6 1.19623E-4 -1.564E-4 1.44958E-4 1.39561E-4 0.45 1.59498E-4 -1.6403E-4 0.3 1.79435E-4 2.9373E-4 0.15 Modify Import/Export Ins before curve(s)

Select one or more curve to send load curve in PRIMER. The load curve edit window is launched in the linked PRIMER session

Edit Curve Entity in PRIMER


3 4 5 Unknown_units x 1.0E-3


Select one or more curves to call up the corresponding EDIT panel in PRIMER, so if for example you clicked on a curve that was an acceleration for a node you would get the node card in PRIMER or if you clicked on a contact force curve you would get the contact card in PRIMER.

Ins after

Delete

Goto point

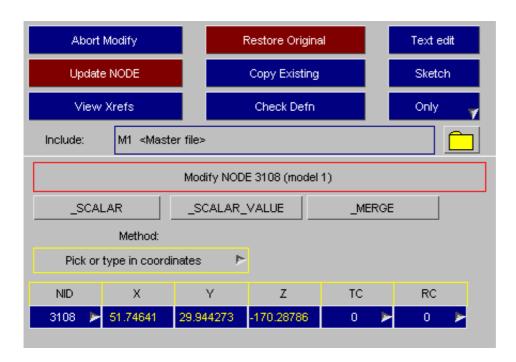

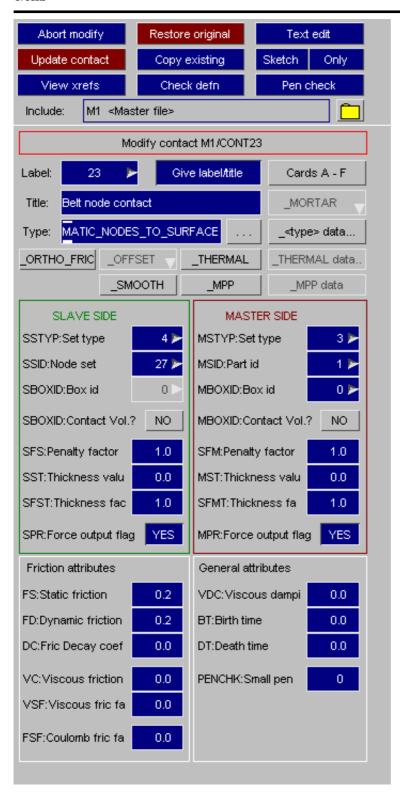

7 FAST-TCF

FAST-TCF CONTENTS

7.0 Overview

7.1 Introduction

7.2 Page / Graph layout and selection 7.3 Input syntax to load other files

7.4 Input for data extraction requests

7.5 Units

7.6 Curve Tags 7.7 Curve Groups

7.8 Performing FAST-TCF curve operations

7.9 Applying extra options to data requests

7.10 Setting properties for curves

7.12 FAST-TCF Image Output options

7.13 Outputting curve properties to text files, variables and REPORTER 7.14 FAST-TCF Curve Output

7.15 FAST-TCF additional

7.0 FAST-TCF OVERVIEW

FAST-TCF is a scripting language for T/HIS. It is designed to be editable and backward-compatible with previous versions of T/HIS. From version 9.2 FAST-TCF scripts can be recorded and played back in T/HIS. The FAST-TCF scripts are plain text files, and are therefore easy to edit and manipulate.

7.0.1 NEW FEATURES

New Features for FAST-TCF version 11.0

Version 11 of T/HIS contains the following new FAST-TCF commands

- Support for DISBOUT data component
- Support for PLLYOUT data components
- style m" command for setting curve styles by model

New Features for FAST-TCF version 10.0

Version 10 of T/HIS contains the following new FAST-TCF commands

- Support for TRHIST data components
- Support for CPM_SENSOR data components
- New wildcard options for specifying curve tags
- Ouputting a range of curves to curve file

New Features for FAST-TCF version 9.4

Version 9.4 of T/HIS contains the following new FAST-TCF commands

- Support for DBFSI data components
- Support for TPRINT data components
- New "plot setup" commands
- New curve style options

New Features for FAST-TCF version 9.3

Because of the multiple graphs and pages available in T/HIS 9.3 additional commands have been added to FAST-TCF 93 to define and position graphs and to generate multiple images containing one or more graphs. Because of these new commands version 9.3 FAST-TCF scripts generated by T/HIS can not be used in previous releases.

- New commands have been added for generating and positioning multiple graphs and pages.
- New commands for generating images containing multiple graphs and pages.
- New variables have been added for accessing the output values of the ERR command. New built in variables "\$run_nameN", "\$run_titleN" and "\$run_dirN" for multiple models.

New built in variable "\$FTCF_PATH"

New Features for FAST-TCF version 9.2

FAST-TCF has been extensively revised to include almost all of the T/HIS commands. The improved functionality does mean that old scripts may have to be changed to meet the new standards.

NOTE: FAST-TCF is not 100% compatible with pre-version 9.1 input scripts:

- Variables have changed to allow more flexibility, but the old rule for filenames (word1 + word2) has now been discontinued, filenames must all be one word
- Rigidwall command must now have "n" for the xtf file output (rather than nothing at all)
 Shell and Solid effective strain must have the fourth word "eff" to distinguish them from other types of strain that have been added
- No FAST-TCF defaults for plot setup defaults are now the T/HIS standard ones

New features since version 9.1:

- Reading of keyword, csv, csv2, and bulk data files, keyboard entry Operation commands "order", "cat", "r_ave", "stress", "logx", "logx10", "translate", "vector2D", "window"
- Variables are processed on a line by line basis
- Variables can be defined using curve properties for example a variable could be set to equal max of a curve, and then used to divide another curve
- Continuation lines added defined using a "\" at the very end of a line
- Tabulation commands "yatmax" and "yatmin" added for Y values at maximum and minimum X
- All extraction commands are supported: Boundary, Geo contacts, FSI, Joints, SPH, Thick shells and so on
- All the missing components for previous data types are now supported
- Multiple data extraction on one line e.g. "node 100:last acc X"
- Multiple generic tagging and labeling of output curves using wildcard "*"
- Multiple curves can be operated upon in one line e.g. "oper ADD acc_* 10.0" Multiple curves can be plotted using wildcards "*" in tag names
- Integration point output can be changed
- Multiple models supported
- Extended plotting syntax for setting up plot defaults (grid colours, offsets, fonts and so on)
- Tabc" command for writing out tabulation data to a csv file
- 'plot" and "auto" commands added for use in interactive playback mode
- macro support for running FAST-TCF files on specific curves

7.1 FAST-TCF INTRODUCTION

7.1.1 General Rules

- Each line in the input file defines one data extraction or plot request 1.
- Long lines can be split into shorter ones using a continuation character "\" at the end of each line 2.
- 3. Space characters are used to divide the line into 'words'
- The input script is NOT case-sensitive.
- Unless detailed elsewhere in this manual, the first few (usually three) characters of the first word on the line 5. discriminate the request of a particular entity, and the syntax which applies to reading in the remaining words on the line
- If the first word on the line is not recognised, the program ignores it it is treated as a comment 6.
- The last words on the data extraction request lines allow options for filtering, Y-axis scaling, HIC, average and a short reference tag (The tags may be used for operation and plotting requests)
- The last words on the plotting request line allow options for title, line style and axis changes
- A successful data extraction always has a curve outputted, if there is no output (e.g. HIC, ERR) then a duplicate curve is outputted. This helps with tagging output curves

7.1.2 Running FAST-TCF

7.1.2.1 Automatic running

FAST-TCF is integrated into the T/HIS executable and can be accessed from the command line or the shell.

Command line syntax:

<this executable> -tcf=<FAST-TCF input file> -start_in=<start directory> -exit -batch <thf file name>

e.g. this93.exe -tcf=side_impact.tcf -start_in=e:\side_impact\run1 -exit
run1.thf

The <thf file file>, -start_in, -exit and -batch syntax are all optional.

NOTES:

- If no THF file is specified then T/HIS will search the directory for the latest one (*.thf).
- If no THF file exists, then T/HIS will look for a d3thdt file (xtf file = xtfile).
- If this does not exist then no thf or xtf input filename is passed to FAST-TCF, and the input file is defaulted to ASCII
- The program runs in any directory you like (via the -start_in command line option). The FAST-TCF output files are created in that directory, and files written out are relative to that directory.

Instead of opening a single model multiple models can be read using the command line option

<this executable> -tcf=<FAST-TCF input file> -start_in=<start directory> -exit -batch -model_list=<file name>

The -model_list expects a text file with a list of filenames (1 per line) to read into model slots within T/HIS.

```
e.g e:\side_imnpact\run1\run1.thf
e:\side_imnpact\run2\run2.thf
e:\side_imnpact\run3\run3.thf
e:\side imnpact\run4\run4.thf
```

Shell operation:

Right click on the SHELLS's T/HIS button, and go to the options menu. Select the FAST-TCF input script and the thf input file if necessary. Return to the main shell menu and press the T/HIS button.

7.1.2.2 Interactive running

In the T/HIS tools menu within T/HIS, select the FAST-TCF option, then click on the "Run" tab in the sub menu that appears. This brings up the following menu:

The user can select the script file then with play the whole file through, or step through each command one by one.

The FAST-TCF line appears in the top dialogue box, and the translated T/HIS line appears in the bottom box. The line about to be sent to T/HIS appears in red text.

To end the script prematurely, hit the "End" button.



7.1.3 Input Files Needed, and Output and Intermediate Files Created

- 1. *input_script* is **required** at the start.
- 2. *input_script*.output is a file that contains the concatenated output from FAST-TCF.
- 3. *input_script*.tmp is a temporary file that FAST-TCF creates for translation. This is merged after completion into *input_script*.output so if you see this file then FAST-TCF didn't finish cleanly.
- 4. *input_script*.rep is a temporary report file of the FAST-TCF run. This is merged after completion into *input_script*.output so if you see this file then FAST-TCF didn't finish cleanly.
- 5. *input_script*.tcf are the commands passed to T/HIS from FAST-TCF. This is merged after completion into *input_script*.output so if you see this file then FAST-TCF didn't finish cleanly. The command lines contain special characters such as \r, \m and \l. These are used internally in T/HIS and should be ignored by the user.
- 6. *input_script*.sngval contains summaries of every curve outputted.

Other files will be made, such as postscript or bitmap plots, but these will have names specified by the user.

7.1.4 Debugging FAST-TCF files

Complicated FAST-TCF files will inevitably go wrong. There are a number of things the user can do to help identify where it is going wrong. Assuming the command line syntax is correct and the correct files are in the run directory, these typical procedures are as follows:

Identifying errors using the interactive playback option in T/HIS:

- Read the model(s) into T/HIS.
- Read the FAST-TCF script into T/HIS under the "FAST-TCF > Run" sub menu.
- Step through the FAST-TCF script manually, keeping an eye on how FAST-TCF is translating the lines, and the output T/HIS is producing.

Identifying if FAST-TCF has found an error:

- If FAST-TCF finds an error, then it is stored and T/HIS then resets the command line and continues to translate the input file. If 10 errors are found then T/HIS will stop at this line. You can set this error amount internally within FAST-TCF.
- Once T/HIS has stopped, the errors are summarised in the command line box and the terminal that T/HIS was run from. The number of warnings found is also printed.
- It should be obvious what is wrong, FAST-TCF checks numerous things, including:
 - Whether T/HIS created the curve from the previous line.
 - That the syntax is correct for all the data input lines (the data extraction requests have additional checking to check the combinations of words inputted is right).
 - If the syntax is correct, whether it applies to the file being requested for output.
 - The output file exists in the directory for the data extraction.
- Correct the input line error utilising the reference tables in this document if applicable.

Identifying what errors T/HIS is giving:

- Identify how many curves were outputted into T/HIS before things went wrong (run T/HIS in graphical mode).
- Place an exit keyword **after the next** input line. This should stop T/HIS just after the line which is causing the file to fail.
- Check what errors T/HIS is giving out. If it's not obvious what went wrong then try another procedure.

Identifying if there are warnings or errors from FAST-TCF:

- The errors are summarised once T/HIS has finished. They are printed in the command line box and the terminal which T/HIS was run from.
- There will be a *input_file*.rep or *input_file*.output file in the directory which contains any warnings or errors that FAST-TCF has detected. Make sure nothing is obviously wrong with the input file using this report file.
- The *input_file*.tmp or *input_file*.output file contains the actual file inputted into FAST-TCF after includes have been found and special characters removed. Check this is correct and all the include files have been accounted for.

Identifying if FAST-TCF is processing the line correctly:

- It's possible that FAST-TCF has processed the line incorrectly. If so, open the *input_file*.tcf or *input_file*.output file to investigate what FAST-TCF is asking T/HIS to do.
- Identify which line is going wrong using the <u>above procedure</u>, and then find this section in the .tcf file. Input the entire tcf request for the line into the T/HIS command box to step through what is being asked from T/HIS. This may highlight where things are going wrong. The command lines contain special characters such as \r, \m and \l. These are used internally in T/HIS and should be ignored by the user.

Using Primer to check a FAST-TCF file:

- Primer has a FAST-TCF check menu under the main check menu. This can be used to check the FAST-TCF file data requests against a certain keyword deck.
- Read the deck into Primer, and select MODEL > CHECK > CHECK FAST-TCF FILE. Select the FAST-TCF file and press APPLY. Details can be found in Section 3.9 of the Primer manual.
- Primer will highlight any errors that have occurred with the input file with regards to the keyword deck.
- The main Primer checks are if the line syntax is valid, whether the correct file is being outputted, whether the relevant DATABASE_HISTORY is present and whether the id. actually exists.
- Any errors will have to be corrected manually in Primer.

NOTE: If FAST-TCF has completed, then it may be necessary to open the *input_file*.output file which has the all the output files concatenated together in different sections.


7.1.5 Creating FAST-TCF files

The most obvious option is to generate a FAST-TCF script using a text editor such as vim or wordpad. However, an easier option is to use T/HIS as normal, then generate a FAST-TCF script to recreate the curves currently displayed on the screen from within T/HIS.

It involves a single button click to produce a FAST-TCF script that can recreate the plot on the screen.

T/HIS internally stores the history behind each curve; noting which curves, operations and data requests were used to create each curve. This means that the user **does not** have to start recording a command file, and carefully record a script. Instead the user can work for as long as they like as normal, then choose to generate a FAST-TCF script to recreate the plot on the screen by using the FAST-TCF > Create menu.

By default the FAST-TCF script that is generated will contain commands to reproduce all of the graphs that are currently defined in T/HIS. Instead of reproducing all of the graphs the FAST-TCF script can also contain the commands to generate a subset or pages or graphs.

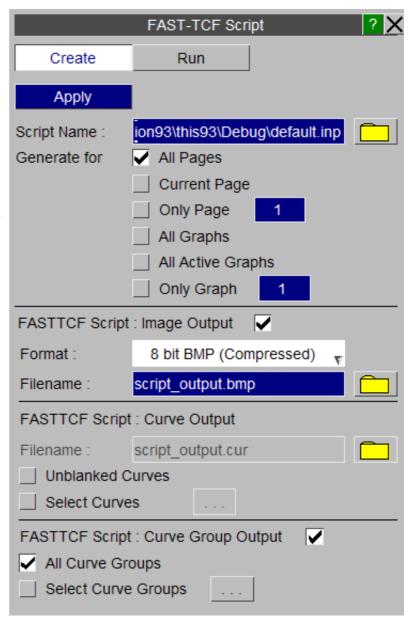

7.1.5.1 FAST-TCF Script: Image Output

This option can be used to add the commands to the FAST-TCF script to generate an image of each graph/page that is selected for output. In addition to selecting the image format a filename can also be specified that is used in the FAST-TCF script as the output filename for images.

7.1.5.2 FAST-TCF Script : Curve Output

This option can be used to add commands to the FAST-TCF script to write curves out to a T/HIS curve file. By default this option will add commands to the FAST-TCF script write any curves that are unblanked in a graph to a curve file. Instead of writing all of the unblanked curves out to a file the "Select Curves" option can be used to select a subset of curves.

7.1.5.3 FAST-TCF Script : Curve Group Output

This option can be used to select additional curves for output to the FAST-TCF script by curve group. If a curve is selected that is also unblanked in one of the graphs the command to regenerate it are only added to the FAST-TCF script once. This option will also add the commands to regenerate the selected curve groups to the FAST-TCF script.

7.2 PAGE / GRAPH LAYOUT AND SELECTION

FAST-TCF scripts can contain commands to create and position multiple graphs. T/HIS Pages can also be created and graphs moved between pages. By default T/HIS will automatically create a single graph on the 1st 'Page' when it starts. If a single graph is required then the script does not need to contain any of the commands in this section. If additional graphs are required then by default they will be created on the 1st Page unless multiple pages have been selected.

Keyword	2nd	3rd	4th	5th word	6th	7th	8th	9th	notes
	word	word	word		word	lword	word	word	

Layout	page	wide		-					Set the page layout to tile wide
Ť	ľ	tall	-	-	-	-	-	-	Set the page layout to tile tall
		cascade	-	-	-	-	-	-	Set the page layout to cascade
		1x1	-	-	-	-	-	-	Set the page layout to 1 by 1 graphs per page
		2x2	-	-	-	-	-	-	Set the page layout to 2 by 2 graphs per page
		3x3	-	-	-	-	-	-	Set the page layout to 3 by 3 graphs per page
		XY	m	n	-	-	-	-	Set the page layout to (m) by (n) graphs per page
		custom	-	-	-	-	-	-	Set the page layout to custom
		n	all	-	-	-	-	-	Add all graphs to page (n)
		n	none	-	-	-	-	-	Remove all graphs from page (n)
		n	add	graph	ID	-	-	-	Add graph (ID) to page (n)
		n	remove	graph	ID	-	-	-	Remove graph (ID) from page (n)
		size	m	n	-	-	-	-	Set the page size to m by n pixels
		size	auto	-	-	-	-	-	Set the page size to automatic
	graph	total	n	-	-	-	-	-	Set the total number of graphs to (n)
		create	-	-	-	-	-	-	Create a new graph
		delete	all	-	-	-	-	-	Deletes all graphs except the first one.
		delete	n	-	-	-	-	-	Delete graph (n)
		position	n	x1,y1	x2,y2	-	-	-	Position graph (n) with the bottom left hand corner at screen location (x1,y1) and the top right hand corner at (x2,y2). All coordinates should be in the range 0.0 to 1.0.
		select	all	-	-	-	-	-	Select all graphs
		select	n	-	-	-	_	-	Select graph (n)
		select	none	-	-	-	-	-	Deselect all graphs
		n	axes	position	left	right	top	bottom	Set the position of the left, right, top and bottom axis for graph (n). The positions given should be in the range 0.0 to 1.0 or the word 'Auto'.
		n / all	legend	position	left	right	top	bottom	Set the position of the left, right, top and bottom of the legend for graph (n) or all graphs. The positions given should be in the range 0.0 to 1.0 or the word 'Auto'
		n / all	legend	format	<type></type>	-	-	-	Set the legend format to one of column/default, full/off, automatic, floating for graph (n)
		n / all	legend	columns	m	-	-	-	Set the number of columns in the legend to m (1 to 3) for graph (n) or all graphs
		n / all	legend	J	standard colour	-	-	-	Set a background colour for the floating legend for graph (n) or all graphs
		n / all		transparency	(0-100)	-	-	-	Set the background transparency for the floating legend for graph (n) or all graphs
		n / all	х	format	<type></type>	-	-	-	Set the x axis unit format to one of automatic, general, scientific for graph (n) or all graphs
		n / all	У	format	<type></type>	-	-	-	Set the y axis unit format to one of automatic, general, scientific for graph (n) or all graphs
		n / all	у2	format	<type></type>	-	-	-	Set the second y axis unit format to one of automatic, general, scientific for graph (n) or all graphs
		n / all	х	precision	m	-	-	-	Set the number of decimal places displayed for the x axis values to (m) in graph (n) or all graphs
		n / all	У	precision	m	-	-		Set the number of decimal places displayed for the y axis values to (m) in graph (n) or all graphs
		n / all	y2	precision	m	-	-	-	Set the number of decimal places displayed for the second y axis values to (m) in graph (n) or all graphs

7.3 INPUT SYNTAX TO LOAD OTHER FILES

FAST-TCF has the option of reading in curve files and other FAST-TCF files nested within the input file. T/HIS now writes out and reads in curve styles and internal tags. FAST-TCF recognizes these tags if the user wishes to refer to them later on in the input file. If they are relative then the include files must be relative to where T/HIS is running from.

Filenames can contain spaces, but if they do then they must be enclosed in quotes

e.g. read "c:\my documents\filename.cur".

Description	,	second word	third word onwards	notes	
Bulk data	readb	bulk data file	-	curves will be read in at this point in the file, and will be numbered accordingly	
CSV 1 (X,Y,X,Y)	readcsv	csv file	Ir <row containing="" labels="" line="" number=""></row>	Subsequent words can be any of these 2 options.	
			ar <row axis="" containing="" labels="" number=""></row>	If no options then assumes reading x from column 1 and no labels.	
CSV 2 (X,Y,Y,Y)	readcsv2	csv file type 2	xg <x start="" value=""> <x interval=""></x></x>	Subsequent words can be any of the 3rd word options. Only one of the options XG and XC can be	
			xc <x column<br="" values="">number></x>	used.	
			Ir <row containing="" labels="" line="" number=""></row>	If no options then assumes reading x from column 1 and no labels.	
			ar <row axis="" containing="" labels="" number=""></row>		
T/HIS Curve file	rea	curve name	-	curves will be read in at this point in the file, and will be numbered accordingly curve tags and styles are stored automatically through the \$TAG and \$STYLE lines NOTE: If the tag in the curve file conflicts with an existing tag, the tag is NOT read in	
Keyword	readk	keyword file name	-	curves will be read in at this point in the file, and will be numbered accordingly	
FAST-TCF Include	inc	include file name	-	FAST-TCF will search for includes within includes etc FAST-TCF pastes the include files into the final input file as soon as they are detected	
LS-PrePost Curve file	readlspost	filename	-	Reads in curves from an LS-PREPOST curve file	
LS-PrePost XY data file	readlsp_xy	filename	-	Reads in curves from an LS-PREPOST XY data file	
DIAdem	read_diadem	header file filename	channel number to read	subsequent words can be either of these 2 options xg <x start="" value=""> <x interval=""> Only one of these 2 options can be used</x></x>	
				xc <channel containing<br="">x-axis></channel>	
JavaScript	java	JavaScript file name	-	Runs a JavaScript. If any curves created by the JavaScript are referenced by following command in the FAST-TCF script then the JavaScript should generate curves tags for the curves whih ccan then be used in the FAST-TCF script.	

Keyboard entry can also be added into the FAST-TCF file, allowing for simple curves to be created in T/HIS. The keyword for this is **keyboard**. The order of the following words is important, and must be adhered to (see below). The continuation line character is useful here "\".

Keyword	following word	following word	notes
Keyboard	xaxis	x axis name	specifies the x axis label
	yaxis	y axis name	specifies the y axis label
	label	curve label	specifies the curve label
		xval,yval xval2,yval2 xval3, yval3 etc	no space between the x and y values, only a space between the pairs of values

for example, to create an acceleration curve with a straight line at value 1.0:

keyboard title straight line \ xaxis time \ yaxis accn \ label straight line at 1.0 \ data 0.000000,1.000000 \ 1.000000,1.000000

7.4 INPUT FOR DATA EXTRACTION REQUESTS

Each data extraction request occupies one line, with the 'words' on the line separated by space characters.

The line starts with a keyword and the required arguments follow, then any optional requests can occur after the arguments (see later on in the manual).

ID can be a number **or a name** (enclosed in quotes ""), depending on whether the LS-DYNA version supports it in the relevant output file.

When writing out FAST-TCF scripts from T/HIS, there is an option in the 'Create' panel to write entity names (when they exist) in place of numeric IDs into any generated script.

Multiple data requests

T/HIS 9.2 onwards supports multiple data output syntax. T/HIS will read the data in one file pass, making it much quicker for larger runs. To use this in FAST-TCF you need to specify the range using a colon (:) and it must be in a single word. As well as the standard numbers you can use, there are some special words namely "all", "first" and "last" (see example).

e.g.	${\tt whole_model}$	te	lsda	
	(whole model)	(total energy)	(force lsda file)	
	node	42	force	y_dir
	(node extraction)	(i.d. 42)	(force in y-direction	n)
	node	"end of roof"	accel	z
	(node extraction)	(i.d. "end of roof")	(z acceleration)	
	node	100:last	force	y_dir
	(node extraction)	all nodes from 100	(force in y-direction	n)
	node	all	force	y_dir
	(node extraction)	all nodes	(force in y-direction	n)

7.4.1 Selecting Models

If T/HIS contains more than one model the data extraction commands will attempt to read data from all the model that are currently selected. To specify which model to read data from the following commands can be used

Keyword	second word	notes		
model	n	Select model "n" for reading data from		
	all	Select all models for reading data from		
	none	Unselect all models		

7.4.2 Data Extraction options

7.4.2.1 Specifying Files for data extraction

For some LS-DYNA data types results can be extracted from multiple files. By default FAST-TCF scripts will extract data from the default T/HIS file type for each entity type (see <u>Section 5.17.1</u>). These defaults can be changed via the <u>preference file</u>.

Instead of using the default file any of the valid files types can be specified by using either the <u>define file</u> keyword (e.g. define file LSDA) or by adding an <u>extra line option</u>. When this occurs, FAST-TCF will take the <u>extraction</u> request from the specified type of file - **but only if T/HIS allows it.**

Keyword		third word	notes
define	file		will always check that t/his can get the output from this file, if not then the original default file will
		ascii	be chosen (see data extraction table). This file can still be overwritten on the actual input line
		xtf	
		thf	
		default	

e.g. node 42 displacement x

(read data from default file)

define file LSDA node 42 displacement x

(read data from LSDA file)

node 42 displacement x ASCII

(read data from ASCII file)

7.4.2.2 Specifying components for Steady State Dynamics (SSD) analysis

For a SSD analysis LS-DYNA generates 2 data values, an amplitude and an angle, for each component in the NODOUT and ELOUT parts of the LSDA (binout) file. By default FAST-TCF will extract the amplitude for each data component but this can be changed if required to extract the angle value.

Keyword	second word	third word	notes
define	ssd_comp amplitude		selects the amplitude value for all following data requests
		angle	selects the angle value for all following data requests

e.g. define ssd comp angle

(read angle value for all SSD analysis data components)

define ssd_comp amplitude

(read amplitude value for all SSD analysis data components)

7.4.3 Defining Groups of Parts

Description	keyword	second word	following words
Group definition	gdef	group id	part ids
Add parts to group	gadd	aroup id	part ids

The line starts with 'gdef' or 'gadd' and is followed by an integer for the group i.d, and then part i.d. numbers separated by spaces, or for a range of parts - separated by a ':'.

No options should be applied to this card, because all the words on the line are written out as integers.

The input is on one line (which may result in a long line ...). If the line is too long (currently ~1000 characters) T/HIS will truncate the command and issue an error message. The 'gadd' command is useful if the 'gdef' command is too long to create a group on a single line.

10:20 30:40 1 2 3 4 e.g. gdef 1 (parts 10 to 20 and 30 to 40) (group define i.d. 1) (parts 1 2 3 and 4) gadd 1 5 6 7 8 50:60 (group add i.d. 1) (parts 5 6 7 and 8) (parts 50 to 60)

7.4.4 Specifying Surfaces, Integration Points and Nodal Locations for data extraction

7.4.4.1 Specifying Surfaces and Integration Points

From version 12.0 onwards the syntax for specifying which surface or integration point to read data from for Shells, Thick Shells and Beams has changed. These options are now appended to data extraction as follows.

Shells and Thick Shells

extra word #1	extra word #2	notes
surface	top	If no surface option is specified then the default (middle) surface will be used.
	middle	
	bottom	
	n	

Beams

extra word #1	extra word #2	notes
ipoint	n	Specifies the beam integration point to read data from

7.4.4.2 Specifying in-plane integration points for Shells and Thick Shells

In recent versions of LS-DYNA it is possible to write out data at multiple in-plane integration points for fully integrated Shells and Thick Shells for each through thickness layer.

For fully integrated solid elements data can also be written out for all 8 integration points.

By default T/HIS will automatically read the average value for each element. If the element isn't fully integrated then the data for the 1st point will be used, if it is fully integrated and has multiple integration points then the average value will be calculated.

	extra word #2	notes
ipoint	n	Specifies the in-plane integration point to read data from.
		If this option isn't specified then the surface centre value will be selected. If the element is fully integrated then the average value will be calculated from all 4 in-plane values

e.g. shell 99 stress xx tag curve_1
 (read x stress for shell 99 middle surface, centre value)
 shell 99 stress xx ipoint 1 tag curve_1
 (read x stress for shell 99 middle surface in-plane integration point 1)

```
shell 99 stress xx surface middle ipoint 1 tag curve_1
(read x stress for shell 99 middle surface in-plane integration point 1)
shell 99 stress xx surface 5 ipoint 2 tag curve_1
(read x stress for shell 99 layer 5 in-plane integration point 2)
```

7.4.4.3 Specifying integration points for Solids

In recent versions of LS-DYNA it is possible to write out data at all 8 integration points or fully integrated solid elements.

By default T/HIS will automatically read the average value for each element. If the element isn't fully integrated then the data for the 1st point will be used, if it is fully integrated and has multiple integration points then the average value will be calculated.

	extra word #2	notes
ipoint	n	Specifies the solid integration point to read data from.
		If this option isn't specified then the centre value will be selected. If the element is fully integrated then the average value will be calculated from all 8 values

7.4.4.4 Selecting data at element nodal positions

In recent versions of LS-DYNA it is possible to write out data for Solid, Shells and Thick Shells that has been extrapolated from the integration points to the elements nodes.

For Shells the values at all through thickness layers can be extrapolated to the nodes. For Thick Shells the bottom surface values are extrapolated to nodes 1-4 and the top surface values are extrapolated to nodes 5-8.

extra word #1	extra word #2	notes
node	n	Specifies the element node number to read data for

```
e.g. shell 99 stress xx node 3
    (read x stress for shell 99 middle surface extrapolated to node 3)
    shell 99 stress xx surface 5 node 1 tag curve_1
    (read x stress for shell 99 layer 5 extrapolated to node 1)
    tshell 99 stress xx node 7 tag curve_1
    (read x stress for thick shell 99 top surface extrapolated to node 7)
    solid 99 stress xx node 4 tag curve_1
    (read x stress for solid 99 extrapolated to node4)
```

7.4.5 Data extraction reference table

Data type	Keyword	Second word	Third word	Fourth word	Description
Airbag	Air	Airbag id	[pr]essure	-	pressure
			[vo]lume	-	volume
			[ie]	-	internal energy
			[in]	-	mass flow rate in
			[ou]	-	mass flow rate out
			[tm]	-	total mass
			[de]nsity	-	Density
			sa	-	Surface area
			[te]mp	-	Gas temperature
			rf	-	Reaction force
			tk	-	Translational Kinetic Energy
			dmp	-	Damping Energy
			рр	-	Average Particle Pressure
			if	-	Inflator Energy
Airbag Part Data	ab_part	Airbag id	Part id	[pr]essure	Pressure
(ABSTAT_CPM)				maf	Mass flow rate through fabric
				mav	Mass flow rate through vent
				ta	Total area
				[te]mperature	Temperature
				ppr	Press s+
				npr	Press s-
				hc	Heat Convection Energy
				ev	Enhanced Vent Flag
				le	Leak Energy
				pvo	Por Volume
				un	Unblocked Area
				ba	Blocked Area
				lk	Leakage
Airbag Chamber Data	ab_chamber	Airbag id	Part id	[pr]essure	Pressure
(ABSTAT_CHAMBER)				[vo]lume	Volume
				[de]nsity	Density
				ie	Internal Energy
				in	Mass flow rate in
				[ou]t	Mass flow rate out
				tm	Total mass
				sa [talaananatuun	Surface area
				[te]mperature	Temperature
				rf tr	Reaction Force Translational Energy
				np	Number of Particles
				рр	Average Particle Pressure
Airhag Sancara	ab_sensor	Sensor id	vo	pp	X coord
Airbag Sensors (CPM_SENSOR)	ab_Selisoi	Sensor id	yc	_	Y coord
·			zc	_	Z coord
			VX	-	X Velocity
			vy	-	Y Velocity
			vz	-	Z Velocity
			vm	-	Velocity Magnitute
			[pr]essure	-	pressure
			[de]nsity	-	Density
			[te]mp	_	Gas temperature
					N Particles
			np		IN FAILUCIES

Beam	Bea	Beam id	[n]ormal	v	Axial force
Deam	Dea	Dealli lu	injonnai	V	Shear force in Y
				7	Shear force in Z
			[m]oment	<u>-</u> V	Moment in Y
				z	Moment in Z
				х	Torsional moment
			[stra]in	1	Axial strain
			[e]nergy	p1	Bending energy: end 1
				p2	Bending energy: end 2
			[r]otation	y1	Y rotation: end 1
				y2	Y rotation: end 2
				z1	Z rotation: end 1
				z2	Z rotation: end 2
				х	Torsional rotation
			[b]ending	y1	Y Bending moment: end 1
				y2	Y Bending moment: end 2
				z1	Z Bending moment: end 1
				z2	Z Bending moment: end 2
			[e]nergy	a	Axial collapse energy
				i	Internal energy
			[stre]ss	х	Axial stress
				ху	XY Shear stress
				ZX	ZX Shear stress
			[eff]	-	Effective plastic strain
			[exx]	-	Axial strain
			[e]xtra	##	Extra data ##
			[di]screte	dx	Axial displacement
				dy	Displacement in Y
				dz	Displacement in Z
				rx	Axial rotation
				ry	Rotation in Y
				rz	Rotation in Z"
Bearing	bear	Bearing id	[fx]	-	X Force
			[fy]	-	Y Force
			[fz]	-	Z Force
			[mx]	-	X Moment
			[my]	-	Y Moment
			[mz]	-	Z Moment
			[dx]	-	X Displacement
			[dy]	-	Y Displacement
			[dz]	-	Z Displacement
			[ax]	1	X Angle
			[ay]	-	Y Angle
			[az]	-	Z Angle
			[lfx]	-	Local X Force
			[lfy]	-	Local Y Force
			[lfz]	_	Local Z Force
			[lmx]	_	Local X Moment
			[lmy]	-	Local Y Moment
			[lmz]	-	Local Z Moment
			[ldx]	-	Local X Displacement
			[ldy]	-	Local Y Displacement
			[ldz]	-	Local Z Displacement
			[lax]	-	Local X Angle
			[lay]	_	Local Y Angle
			[laz]	_	Local Z Angle
			إنسكا		Loodi & Aligio

Devendent	D	Davidan id	[m] and all lands	le	Applied V Fares
Boundary	Bou	Boundary id	[n]odal loads	fx	Applied X Force
				fy	Applied Y Force
				fz	Applied Z Force
				fm	Applied Resultant force
			Fortier of the advantage of a	e	Energy from applied force
			[ri]gid body loads	fx	Applied X Force
				fy	Applied Y Force
				fz	Applied Z Force
				fm	Applied Resultant force
				e	Energy from applied force
			[p]ressure nodal loads	fx	Applied X Force
			loads	fy	Applied Y Force
				fz	Applied Z Force
				fm	Applied Resultant force
				е	Energy from applied force
			[rv]elocity r-body	fx	BC motion X Force
			loads	fy	BC motion Y Force
				fz	BC motion Z Force
				fm on	Resultant BC motion force
				en	Energy from BC motion
				mx mv	BC motion X Moment BC motion Y Moment
				my mz	BC motion Z Moment
				mm	BC Moment Magnitude
			[v]elocity nodal loads		BC motion X Force
			[v]elocity flodal loads	fy	BC motion Y Force
				fz	BC motion Z Force
				fm	Resultant BC motion force
				е	Energy from BC motion
CESE Element or Point		Element / Point id [c]oord [ve]locity	[c]oord	х	Current X coord
	cese_pt			У	Current Y coord
				Z	Current Z coord
			r 21 3	m	Current Vector
			[ve]locity	х	X Velocity
				У	X Velocity
				Z	Z Velocity
				m	Velocity Magnitude
			[vo]rticity	х	X Vorticity
				У	Y Vorticity
				Z	Z Vorticity
				m	Vorticity Magnitude
			[d]ensity	-	Density
			[pr]essure	-	Pressure
			[t]emperature	-	Temperature
CESE FSI Drag	cese_fs	1=solid, 2=shell, 3=sol2D, 4=beam	[dr]ag	рх	X Pressure Force
		0-0012D, 7-00aiii		ру	Y Pressure Force
				pz	Z Pressure Force
				pm	Pressure Force Magnitude
CESE Segment Set Drag	cese_ss	Part id (0 if only one part requested)	[dr]ag	рх	X Pressure Force
Diag		part requesteu)		ру	Y Pressure Force
				pz	Z Pressure Force
				pm	Pressure Force Magnitude
				vx	X Viscous Force
				vy	Y Viscous Force
				VZ	Z Viscous Force
				vm	Viscous Force Magnitude
				area	Total Area

Contact	Con / Sli	Contact id	[flores	l,	Master V force
Contact	COIT/ SII	Contact id	[f]orce	X V	Master X force Master Y force
				ř	Master Z force
				<u>z</u> m	Master Force Magnitude
					Slave X force
				xs ys	Slave Y force
				zs	Slave 7 force
				ms	Slave Force Magnitude
			[mo]ment		Master X moment
			linolinent	X	Master Y moment
				7	Master Z moment
				XS	Slave X moment
				ys	Slave Y moment
				zs	Slave Z moment
			[ma]ss	m	Master Mass
			[majoo	s	Slave Mass
			[e]nergy	t	Total energy (Slave + Master)
				s	Slave side energy
				m	Master side energy
				f	Frictional energy
			[g]eometric	fx	X force
			[9]oomonio	fy	Y force
				fz	Z force
				fm	Force Magnitude
				mx	Moment in X
				my	Moment in Y
				mz	Moment in Z
				mm	Moment Magnitude
Cross section	Cro / Sec	Section id	[f]orce	х	X force
				у	Y force
				Z	Z force
				m	Force Magnitude
			[m]oment	х	Moment in X
				у	Moment in Y
				z	Moment in Z
				m	Moment Magnitude
			[c]entroid	х	X centroid coord
				У	Y centroid coord
				z	Z centroid coord
			[a]rea	-	Area of section

			Í	i	
EM Element, Node or Point		Element / Node / Point id	[co]ord	Х	Current X coord
i onit		iu		У	Current Y coord
				Z	Current Z coord
				m	Current Vector
			[cu]rrent	X	X Current
				У	X Current
				Z	Z Current
				m	Current Magnitude
			[a]field	X	X AField
				У	Y AField
				Z	Z AField
				m	AField Magnitude
			[b]field	х	X BField
				У	Y BField
				z	Z BField
				m	BField Magnitude
			[e]field	х	X EField
				У	Y EField
				Z	Z EField
				m	EField Magnitude
			[I]force	х	X Lorentz Force
				У	Y Lorentz Force
				z	Z Lorentz Force
				m	Lorentz Force Magnitude
			[s]igma	-	Sigma
			[m]ur	-	Mu-R
			[j]hrate	-	JHRate
FSI	FSI		[pr]essure	-	pressure
			[f]orce	х	X force
				У	Y force
				z	Z force
				m	Force Magnitude
			[po]rous	-	Porous Leakage
			[m]ass	-	Mass Flux
ICFD Drag	icfd_dr	Part id / -1 for average /	[dra]g	рх	X Pressure Drag
101 D D 149	lora_a.	0 for sum or if only one	[Gla]g	ру	Y Pressure Drag
		part		pz	Z Pressure Drag
					j
				pm	Pressure Drag Magnitude
				vx	X Viscous Drag
				vy	Y Viscous Drag
				VZ	Z Viscous Drag
				vm	Viscous Drag Magnitude
				pmx	MX Pressure Drag
				pmy	MY Pressure Drag
				pmz	MZ Pressure Drag
				pmm	Pressure Drag Moment Magnitude
				vmx	MX Viscous Drag
				vmy	MY Viscous Drag
				vmz	MZ Viscous Drag
				vmm	Viscous Drag Moment
				VIIIII	Magnitude

		1			ĺ
ICFD Node or Point	icfd_nd / icfd_pt Node / Point id	[c]oord	X	Current X coord	
				У	Current Y coord
				z	Current Z coord
				m	Current Vector
			[ve]locity	х	X Velocity
			У	X Velocity	
				Z	Z Velocity
				m	Velocity Magnitude
			[vo]rticity	х	X Vorticity
				У	Y Vorticity
				z	Z Vorticity
				m	Vorticity Magnitude
			[d]ensity	-	Density
			[pr]essure	-	Pressure
			[t]emperature	-	Temperature
ICFD Temp	icfd_th	Part id / 0 for sum or if	[t_a]rea	average	Temperature Area Average
	- 1 <u>-</u> -	only one part	[t_s]um	average	Temperature Sum Average
			[he]at	flux	Average Heat Flux
			[tot]al	area	Total Area
			[ht]c	_	Heat Transfer Coefficient
Joint	Joi	Joint id	[f]orce	v	X force
John	301	John Id	liloice	V	Y force
				7	Z force
				m	Force Magnitude
			[m]oment	x	Moment in X
			injoinent	V	Moment in Y
				7	Moment in Z
				m	Moment Magnitude
			*CONSTRAINED_J		
			[ph]i	an	Phi angle
			[priji	dt	d(Phi)/dt
				st	Phi stiffness moment
				da	Phi damping moment
				to	Phi total moment
			[th]eta	an	Theta angle
			,	dt	d(Theta)/dt
				st	Theta stiffness moment
				da	Theta damping moment
				to	Theta total moment
			[ps]i	an	Psi angle
				dt	d(Psi)/dt
				st	Psi stiffness moment
				da	Psi damping moment
				to	Psi total moment
			[ge]neralized	en	Total joint energy
			*CONSTRAINED_J	OINT_STIFFNES	SS_FLEXION-TORSION
			[al]pha	an	Alpha angle
			"	dt	d(Alpha)/dt
				st	Alpha stiffness moment
				da	Alpha damping moment
				to	Alpha total moment
			[be]ta	an	Beta angle
			[SO]ia	dt	
					d(Beta)/dt
			st da	Beta stiffness moment	
					Beta damping moment
			[ga]mma	to	Beta total moment
			[ga]mma	an	Gamma angle
				dt	d(Gamma)/dt
			[fllovion	fa	Gamma scale factor
		[fl]exion	en	Total joint energy	

Joint	Joi	Joint id	*CONSTRAINED_JO	DINT_STIFFNES	S_TRANSLATIONAL
			[tr]anslational	xd	X displacement
				dxd	d(X)/dt
				yd	Y displacement
				dyd	d(Y)/dt
				zd	Z displacement
				dzd	d(Z)/dt
				xsf	X stiffness
				xdf	X damping
				xtf	X total
				ysf	Y stiffness
				ydf	Y damping
				ytf	Y total
				zsf	Z stiffness
				zdf	Z damping
				ztf	Z total
				en	Total joint energy
Node	No	Node id	[te]mperature	х	Temperature
			[to]p	temperature	Top Surface Temperature
			[bo]ttom	temperature	Bottom Surface Temperature
			[d]isplacement	х	X Displacement
				у	Y Displacement
				z	Z Displacement
				m	Displacement Magnitute
			[v]elocity	х	X Velocity
			,	У	Y Velocity
				z	Z Velocity
		[a]cceleration		m	Velocity Magnitute
			[a]cceleration	х	X Acceleration
				у	Y Acceleration
				z	Z Acceleration
				m	Acceleration Magnitude
			[c]oord	х	Current X coord
				У	Current Y coord
				z	Current Z coord
			r. 1	m	Current Vector
			[b]asic	<u>x</u>	Basic X coord Basic Y coord
				<u>y</u> _	
				<u>z</u> m	Basic Z coord Basic Vector
			[r]otation	x	X rotation
			[1]	У	Y rotation
				z	Z rotation
				m	Rotation Magnitude
				vx	X rotational velocity
				vy	Y rotational velocity
				vz	Z rotational velocity
				vm	Rotation Vel Magnitude
				ax	X rotational acceleration
				ay	Y rotational acceleration
				az	Z rotational acceleration
				am	Rotation Accel Magnitude
			force	x	X force
				У	Y force
				Z	Z force
			[a]aana	m	Force Magnitude
No de Or	N	0	[e]nergy	-	Energy
Node Group	Ng	Group id	force	<u>x</u>	X force
				у -	Y force
				<u>z</u> m	Z force Force Magnitude
				ļ	- 5766 Magrittude

_	_	<u> </u>			
Part	Pa	Part id	[k]inetic e	-	Kinetic energy
			[i]nternal e	-	Internal energy
			[h]ourglass e	-	Hourglass energy
			[t]otal e	-	Total energy
			[mx]	-	X momentum
			[my]	-	Y momentum
			[mz]	-	Z momentum
			[x] velocity	-	Average X velocity
			[y] velocity	-	Average Y velocity
			[z] velocity	-	Average Z velocity
			[am]	-	Added mass
			[ek]	-	Eroded Kinetic energy
			[ei]	-	Eroded Internal energy
Part group	Gro	Group id	[k]inetic e	-	Kinetic energy
			[i]nternal e	-	Internal energy
			[h]ourglass e	-	Hourglass energy
			[t]otal e	-	Total energy
			[am]	-	Added mass
Particle Blast	Pbl	PBlast id	[a]ir	ie	Air Internal Energy
			[d]etprod	ie	Detn Product Internal Energy
			[o]ut	ie	Outside Domain Internal Energy
			[a]ir	te	Air Translational Energy
			[d]etprod	te	Detn Product Translational
			[a]ctprod	ıc	Energy
			[o]ut	te	Outside Domain Translational Energy
Particle Blast Part	Pbp	Part id	[a]ir	pr	Air Pressure
			[d]etprod	pr	Detn Product Pressure
			[r]es	pr	Resultant Pressure
			[ar]ea	-	Surface Area
			[a]ir	х	Air X Force
			[a]ir	у	Air Y Force
			[a]ir	z	Air Z Force
			[d]etprod	х	Detn Product X Force
			[d]etprod	у	Detn Product Y Force
			[d]etprod	z	Detn Product Z Force
			[r]es	х	Resultant X Force
			[r]es	у	Resultant Y Force
			[r]es	z	Resultant Z Force
Pressure Tube	Prt	Node id	[ar]ea	-	Cross Section Area
			[de]nsity	-	Density
			[pr]essure	-	Pressure
			[v]elocity	-	Velocity
Pulleys	Pul	Pulley id	[fo]rce	-	Force
			[sl]ip	-	Slip
			[ra]te	-	Slip Rate
			[an]gle	-	Wrap Angle
Retractor	Ret	Retractor id	[fo]rce	-	Force
			[p]ullout	-	Pullout
			[fvp]	-	Force v Pullout
Rigid wall	Rig / Wall	Wall id	[n]ormal force	-	Normal force
			[x] force	-	Global X force
			[y] force	-	Global Y force
			[z] force	-	Global Z force
			[e]nergy	-	Energy
Rigid wall Segment	Rigid_seg	Wall id	Segment id	[x] force	Global X force
				[y] force	Global Y force
				[z] force	Global Z force
				L J	

D' ' L (NDD	, ,	D	r 12:		V B: 1
Rigid part / NRB	rpa / nrb	Part id	[d]isplacement	х	X Displacement
				У	Y Displacement
				z	Z Displacement
				m	Displacement Magnitude
			[v]elocity	х	X Velocity
				у	Y Velocity
				z	Z Velocity
				m	Velocity Magnitude
			[a]cceleration	х	X Acceleration
			[-]	V	Y Acceleration
				7	Z Acceleration
				m	Acceleration Magnitude
			[c]oord	х	X coord
			[0]00.0	V	Y coord
				z	Z coord
			[r]otation	x	X rotation
			. ,	У	Y rotation
				z	Z rotation
				m	Rotation Magnitude
				vx	X rotational velocity
				vy	Y rotational velocity
				VZ	Z rotational velocity
				vm	Rotation Vel Magnitude
				ax	X rotational acceleration Y rotational acceleration
				ay az	Z rotational acceleration
				am	Rotation Accel Magnitude
Rigid part / NRB	rpa / nrb	Part id	[dc]os	11	Direction Cosine 11
Kigiu part / NKB	ipa / Ilib	i ait iu	[ac]os	12	Direction Cosine 12
				13	Direction Cosine 13
				21	Direction Cosine 21
				22	Direction Cosine 22
				23	Direction Cosine 23
				31	Direction Cosine 31
				32	Direction Cosine 32
			F1 13: 1	33	Direction Cosine 33
			[ld]isplacement (local)	x	Local X Displacement
			(IOCal)	У	Local Y Displacement
				Z	Local Z Displacement
			[lv]elocity (local)	х	Local X Velocity
				У	Local Y Velocity
				z	Local Z Velocity
			[la]cceleration (local)	х	Local X Acceleration
				У	Local Y Acceleration
				z	Local Z Acceleration
			[Ir]otation (local)	x	Local X rotation
				У	Local Y rotation
				z	Local Z rotation
				vx	Local X rotational vel
				vy	Local Y rotational vel
				VZ	Local Z rotational vel
				ax	Local X rotational accel
				ay	Local Y rotational accel
Soot holt	Soc / Dol	Polt id		az	Local Z rotational accel
Seat belt	Sea / Bel	Belt id	[fo]rce	-	Force
			[s]train	-	Strain
			[fvs]	-	Force v Strain
			[I]ength	-	Current Length

o:	l _o .	lo	l		o
Shell	Sh	Shell id	[stre]ss	xx	Stress in XX
				уу	Stress in YY
				zz	Stress in ZZ
				ху	Stress in XY
				yz	Stress in YZ
				ZX	Stress in ZX
				mx	MAX principal stress
				mn	MIN principal stress
				ms	MAX shear stress
				vm	von Mises stress
				av	Average stress (Pressure)
			[stra]in	xx	Strain in XX
				уу	Strain in YY
				ZZ	Strain in ZZ
				ху	Strain in XY
				yz	Strain in YZ
				ZX	Strain in ZX
				ma	MAX principal strain
				mi	MIN principal strain
				sh	MAX shear strain
				vm	von Mises strain
					Average strain
			[pla]stic	ef	Effective plastic strain
			[m]oment	x	Moment in X
			[mjomont	V	Moment in Y
				xy	Moment in XY
			[f]orce	SX	Shear force in X
				sy	Shear force in Y
				nx	Normal force in X
				ny	Normal force in Y
					Normal force in XY
			[4]h:almana	nxy	
			[t]hickness	-	Thickness
			[i]nternal	-	Internal energy density
			[e]xtra	##	Extra data ##
Slipring	Slp	Slipring id	[p]ullout	-	Pull through
Solid	So	Solid id	[stre]ss	xx	Stress in XX
				уу	Stress in YY
				zz	Stress in ZZ
				ху	Stress in XY
				yz	Stress in YZ
				ZX	Stress in ZX
				mx	MAX principal stress
				mn	MIN principal stress
				ms	MAX shear stress
				vm	von Mises stress
				av	Average stress (Pressure)
			[stra]in	xx	Strain in XX
				уу	Strain in YY
				ZZ	Strain in ZZ
				ху	Strain in XY
				yz	Strain in YZ
				zx	Strain in ZX
					MAX principal strain
					MIN principal strain
				sh	MAX shear strain
				vm	von Mises strain
					Average strain
			[pla]etia	uv	r worago strain
			Inlaletic		
			[pla]stic [e]xtra	ef ##	Effective plastic strain Extra data ##

SPC	SPC	SPC id	[f]orce	x	X force
	0. 0	0. 0.0	[.]0.00	V	Y force
				z	Z force
				m	Force Magnitude
			[m]oment	х	Moment in X
				у	Moment in Y
				z	Moment in Z
				m	Moment Magnitude
SPH	SPH	SPH id	[d]ensity	-	Density
			[stra]in	xx	Strain in XX
				уу	Strain in YY
				ZZ	Strain in ZZ
				xy	Strain in XY
				yz	Strain in YZ
				zx	Strain in ZX
			[stre]ss	ef	Effective Stress
				xx	Stress in XX
				уу	Stress in YY
				ZZ	Stress in ZZ
				xy	Stress in XY
				yz	Stress in YZ
				zx	Stress in ZX
			[I]ength	-	Smoothing Length

Chatwald	C	Chatwold id	[aa]natrainad	[o]viol	Avial force
Spotweld	Sw	Spotweld id	[co]nstrained	[a]xial	Axial force
				[s]hear	Shear force
				[l]ength	Length
				[f]ailure	Failure (failed if > 1.0)
				[ma]ximum	Maximum failure value
				[t]ime	Failure Time
			[ge]neralised	[a]xial	Axial force
				[s]hear	Shear force
				[l]ength	Length
				[f]ailure	Failure (failed if > 1.0)
				[ma]ximum	Maximum failure value
				[t]ime	Failure Time
			[sp]otweld	[a]xial	Axial force
				[s]hear	Shear force
				[l]ength	Length
				[f]ailure	Failure (failed if > 1.0)
				[ma]ximum	Maximum failure value
				[t]ime	Failure Time
				[m]oment	Resultant Moment
			[so]lid	[a]xial	Axial force
			[30]iiu	[s]hear	Shear force
				[I]ength	Length
				[f]ailure	Failure (failed if > 1.0)
				[ma]ximum	Maximum failure value
				[t]ime	Failure Time
				ff	DC Failure Function
				nf 	Normal Failure Term
				sf bf	Shear Failure Trem Bending Failure Term
		[no	[male land	[ar]ea	Spotweld Area
			[no]n-local	[a]xial	Axial force
				[s]hear	Shear force
				[l]ength	Length
				[f]ailure	Failure (failed if > 1.0)
				[ma]ximum	Maximum failure value
				[t]ime	Failure Time
			[ass]embly	[a]xial	Axial force
				[s]hear	Shear force
					Length
				[f]ailure	Failure (failed if > 1.0)
				[m]oment	Resultant Moment
				[t]ime	Failure Time
				ff	DC Failure Function
				nf	Normal Failure Term
				sf	Shear Failure Trem
				bf	Bending Failure Term
	- 15			[ar]ea	Spotweld Area
Spring	Sp / Da	Spring id	[f]orce	-	Force
			[e]longation	-	Elongation
			[fve]	-	Force v Elongation
			[en]ergy	-	Energy
			[m]oment	-	Moment
			[r]otation	-	Rotation
		[mvr]	-	Moment v Rotation	
			[x] force	-	Global X force
			[y] force	-	Global Y force
			[z] force	-	Global Z force
			[mx]	-	Moment in X
			[my]	_	Moment in Y
			[mz]	_	Moment in Z
			[re]nergy		Rotational Energy

Subsystem	Ss	Subsystem id	[k]inetic e	_	Kinetic energy
		Oubsystem id	[i]nternal e	_	Internal energy
			[h]ourglass e		Hourglass energy
			[kr]		Kinetic Energy Ratio
				-	Internal Energy Ratio
			[ir]		•
			[mx]	-	X momentum
			[my]	-	Y momentum
			[mz]	-	Z momentum
Thick Shell	Thi / Tsh	Tshell id	[stre]ss	xx	Stress in XX
				уу	Stress in YY
				ZZ	Stress in ZZ
				ху	Stress in XY
				yz	Stress in YZ
				ZX	Stress in ZX
				mx	MAX principal stress
				mn	MIN principal stress
				ms	MAX shear stress
				vm	von Mises stress
				av	Average stress (Pressure)
			[stra]in	XX	Strain in XX
				уу	Strain in YY
				ZZ	Strain in ZZ Strain in XY
				xy	
				yz	Strain in YZ
				zx ma	Strain in ZX MAX principal strain
				mi	MIN principal strain
				sh	MAX shear strain
				vm	von Mises strain
				av	Average strain
			[pla]stic	ef	Effective plastic strain
			[e]xtra	##	Extra data ##
TRACERS	Tr	Tracer ID	[d]isplacement	x	Current X coord
INACENO		Tracer ib	[u]ispiacement	v	Current Y coord
				z	Current Z coord
				m	Current Vector
			[v]elocity	х	X Velocity
				У	Y Velocity
				z	Z Velocity
				m	Velocity Magnitute
			[stre]ss	xx	Stress in XX
			[66]66	уу	Stress in YY
				zz	Stress in ZZ
				xy	Stress in XY
				yz	Stress in YZ
				zx	Stress in ZX
			EFP	-	3.1330 III 2 7.
			(de)nsity	-	Density
			rvol	-	Relative Volume
			ac[tive]	-	Active

Whole model	Wh	-	[dt]	-	Time step
			[k]inetic e	-	Kinetic energy
			[i]nternal e	-	Internal energy
			[sw]	-	Stonewall energy
			[j]oint e	-	Joint internal energy
			[sp]ring e	-	Spring and damper energy
			[h]ourglass e	-	Hourglass energy
			[sy]stem e	-	System damping energy
			[si]	-	Sliding interface energy
			[ew]	-	External work
			[rb]	-	Rigid Body stopper energy
			[t]otal e	-	Total energy
			[er]	-	Total/initial energy
			[x] velocity	-	Average X velocity
			[y] velocity	-	Average Y velocity
			[z] velocity	-	Average Z velocity
			[cy]cle time	-	Time per zone cycle
			[am]		Added mass
			[pm]	-	%age Mass increase
			[ek]	-	Eroded Kinetic energy
			[ei]	-	Eroded Internal energy
			[eh]	-	Eroded Hourglass energy
			[ewoe]		Energy Ratio w/o Eroded
		[m]ass	-	Mass	

7.4.5.1 Defining Surfaces / Integration points for data extraction

Some data components can be written out at multiple locations.

In recent versions of LS-DYNA it is possible for each element to write out multiple values for some data components.

For fully integrated Shells and Thick Shells values can be written out for all 4 in-plane integration points in each through thickness location. In addition to the integration point values it is also possible to write out data that has been extrapolated from the integration points out to the shells nodes.

For fully integrated solid elements data can also be written out for all 8 integration points and values can also be extrapolated to the elements nodes.

To select these additional values the entity ID's specified in a FAST-TCF scripts can be modified as follows.

Solids	n	Average value for solid (default)			
	n@X	Value at integration point X (0 < X < 8)			
	n@-X	Value at node X (0 < X < 8)			
Shells	n	Average value for shell (default)			
	n@X	Value at integration point X (0 < X < 4)			
	n@-X	Value at node X (0 < X < 4)			
Shells	n	Average value for thick shell (default)			
	n@X	Value at integration point X (0 < X < 4)			
	n@-X	Value at node X (0 < X < 8)			

e.g. solid 10

(solid 10 - average value)

solid 20@5

(solid 20 - data from 5th integration point)

 $\verb|shell 20@-3|$

(shell 20 - data extrapolated to shells 3rd node)

7.5 UNITS

From version 9.4 onwards T/HIS can automatically add unit information to graph labels and it can convert results from one unit system to another.

Each model in T/HIS can have a Unit System defined for it and a separate Unit System can be defined for displaying results. T/HIS will automatically convert results from the model Unit System to the display Unit System. T/HIS has 6 built in unit systems.

Unit System name	Units
U1	m,kg,s
U2	mm,Tonnes,s
	mm,kg,ms
U4	mm,gm.ms
U5	ft,slug,s
U6	m,Tonnes,s

7.5.1 Setting the unit system for a model

To set the unit system for a model

Keyword	second word	third word	fourth word	notes
unit	model	n	U1	Set the unit system for model 'n' to U1
			U2	Set the unit system for model 'n' to U2
				U3
			U4	Set the unit system for model 'n' to U4
			U5	Set the unit system for model 'n' to U5
		U6	U6	Set the unit system for model 'n' to U6
		all	as above	Set the unit system for all models

7.5.2 Setting the DISPLAY unit system

To set the display unit system

Keyword	second word	third word	notes
unit	display	U1	Set the display unit system to U1
		U2	Set the display unit system to U2
		U3	Set the display unit system to U3
		U4	Set the display unit system to U4
		U5	Set the display unit system to U5
		U6	Set the display unit system to U6

7.5.3 Curve Axis units

By default T/HIS will automatically set the Unit System for any curves read from a model to those of the model. In addition to setting the curve Unit System T/HIS will automatically set a unit type for the X and Y axis of the curve. These unit types are maintained through curve operations so that the correct units can be displayed for each curve.

The X and Y Axis units for a curve can be manually set if required.

Keyword	second word	third word	additional words		notes
unit	сх	curve #1	curve #2 to curve #n		 ## ends the curve list Set the X axis unit for curves
		*	##		## ends the curve list Set the X axis unit for all curves
	су	curve #1	curve #2 to curve #n		 ## ends the curve list Set the Y axis unit for curves
		*	##		## ends the curve list Set the Y axis unit for all curves

The Unit name can be any of the following

Time	Rotation	Momentum	Energy Den
Energy	Rot Vel	Density	Mass Flow
Work	Rot Accel	Stress	Frequency
Temperature	Length	Strain	Power
Displacement	Area	Force	Thermal Flux
Velocity	Volume	Moment	Force width
Accel	Mass	Pressure	Moment width
Viscosity	Thermal Diffusivity	Vorticity	Q Criterion
Current	Vec Potential	Magnetic Flux Vec	Elec Field Vec
Conductivity			

7.5.4 Curve Unit Systems

If a curve has been read in from any source other than a model then the Unit System can also be set.

Keyword	second word	third word	additional word	s	notes
unit	cu	curve #1	curve #2 to curve #n	##	## ends the curve list Set the Unit System for curves
		*	##		## ends the curve list Set the Unit System for all curves

7.5.5 Other UNIT options

If a CSV file is written out from within a FAST-TCF script (see <u>Section 7.14</u>) then by default it will contain rows containing UNIT information for the curves if UNITS have been defined.

Some third party applications and scripts can not read T/HIS CSV files containing this additional UNIT information correctly. The following option can be added to FAST-TCF scripts to turn on and off the output of this additional information.

Keyword	second word	third word	notes
unit	csv	on	Turns on the output of UNIT information to CSV files
		off	Turns off the output of UNIT information to CSV files

7.6 CURVE TAGS

In FAST-TCF any operation that uses one or more curves as an input can reference the curve using either the curve number or a curve tag. The use of curve Tags is strongly recommended as it enables scripts to be easily modified and sections added / deleted without having to renumber all the curve references within the script.

Curve tags are defined for a curve by adding the keyword TAG to the data extraction command followed by the tag.

e.g.	node	42	${\tt force y_dir}$	tag curve_1
	(node)	(i.d. 42)	(force in y-direction) (tag the curve as "curve_1")
	node	"end of roof"	accel z	tag point_2
	(node)	(i.d. "end of roof")	(z acceleration)	(tag the curve as "point_2")

Tags cannot begin with a numeric character, e.g. tag 1_curve is not allowed.

If a tag is not specified for a curve then FAST-TCF will automatically generate a tag for the curve using the T/HIS curve number as the TAG.

The TAG for a curve can be redefined at anytime within a script using the "tag" command (see Section 7.10.1) for more details. Once a curve tag has been redefined the original definition should not be used in any following commands - a curve can only have 1 TAG defined at any time.

7.6.1 Tagging curves from a T/HIS curve file

Curves read in from a T/HIS curve file can be tagged by referring to each curve in the file using a negative number:

e.g.	tag	-1	\mathtt{curve}_1
		(1st curve in the curve file)	(tag as "curve_1")
	tag	- 2	curve_2
		(2nd curve in the curve file)	(tag as "curve_2")

If curves are read in from a T/HIS curve file then then the FAST-TCF tag will be generated using the following rules.

- 1. If the data extraction command contains a TAG option then that TAG will be used (as above).
- 2. If the curve file contains curve tags then they will be used if the data extraction command DOES NOT contain a TAG option.
- 3. If no tags are specified in the file or in the data extraction command then T/His will automatically tag each curve as '#' where # is the internal T/HIS curve number.

In the third case, if for example there are three curves already in T/HIS, the curves read in from the curve file will be tagged as '4', '5', '6', '7', etc. This limits how you can refer to these curves since would not be able to multiply two curves together. For example the command 'op mul 4 5 tag new_curve' would multiply the curve tagged as '4' by the number 5, not by the curve tagged as '5'.

To avoid this limitation you will need to tag your curves using either the syntax explained above or by specifying a tag in the curve file.

7.6.2 Tagging multiple curve outputs

From version 9.2 onwards multiple curve outputs can be generated from one FAST-TCF input line. Curve tags and labels can be specified for multiple curves using the following special syntax (note this only works on multiple curves):

• If the user specifies a wildcard in the tag or label (a "*"), then FAST-TCF will substitute the wildcard for the

- If the user specifies a wildcard in the tag or label (a "*"), then FAST-TCF will substitute the wildcard for the number of the curve outputted (starting from 1).
- If the user specifies a "##" then the entity ID is substituted in its place which is useful if the user knows what entities are expected on output.

```
e.g. node 5:last accel mag tag node_* lab Head Accn *

(node IDs. 5 to last) (accel mag) tags = node_1, node_2, etc labels = Head Accn 1, Head Accn 2, etc

node 10:20 accel mag tag node_## lab Head Accn ##

(nodes 10 to 20) (accel mag) tags = node_10, node_11, etc labels = Head Accn 10, Head Accn 11, etc
```

7.6.3 Using Wildcards

A number of T/HIS functions and operations can be applied to multiple curves in a single command by specifying multiple curve tags using wildcards.

From version 10.0 onwards the following wildcards are supported

Wildcard	Matches				
*	1 or more characters				
?	a single character				
[a-e]	matches a single character against a range of characters, 'a','b','c','d' or 'e'				
[abc]	matches a single character against a list of characters, 'a', 'b' or 'c'				

e.g. operate multiple x_disp_* 10 tag x_mul_*

(Multiple all curves with a tag starting with "x_disp_" by 10 and tag the outputs as x_mul_1, x_mul_2 ... - see Section 7.8 for more details)

display x_disp_*

(Display all curves with a tag starting with "x disp" - see Section 7.12.4 for more details)

copy curve_file.cur x_disp_*

(Write all curves with a tag starting with "x_disp_" to a file called "curve_file.cur"- see Section 7.14 for more details)

csv curve file.csv curve 1? curve 3[0-3]

Write curves with tags curve_10, curve_11, curve_12 and curves with tags curve_30, curve_31, curve_32, curve_33 to a CSV file called "curve_file.csv"- see Section 7.14 for more details)

7.6.4 Using Curve Numbers

Although it is not recommended curves can be referenced using the internal curve number instead of the curve tag. If for example the 1st curve generated by a script has the tag "curve_1" then the following 2 commands are identical.

e.g. operate multiple curve_1 10 tag x_mul_*
operate multiple #1 10 tag x mul *

If curve numbers are used within a script then T/HIS will automatically offset the curve numbers in the script by the number of curves T/HIS already has defined before the script is executed.

e.g. operate multiple #1 10 tag x mul *

would multiply internal curve number 1 by 10 if T/HIS didn't contain any curve definitions when the script was run.

If T/HIS already contained 100 curves then the same command would multiple internal curve 101 by 10.

This means it is possible to play a script containing curve numbers multiple times within a session without having to either delete all the existing curves or modify the script each time.

7.6.5 Tagging the most recently created or highest ID curve

The most recently created/edited curve or the curve with the highest ID can be tagged with the specific commands "recent" and "highest".

e.g. tag recent curve_tag_1
tag highest curve tag 2

These commands won't be written out automatically into a FAST-TCF script, so will need to be added manually. It is worth noting that if a curve tag starts with "recent" or "highest", then any command intended to change the tag would instead be interpretted as setting the tag of the most recent or highest ID curve, as in the above example. It is therefore recommended that curve tags should not start with "recent" or "highest".

7.7 CURVE GROUPS

Curve groups can be defined within FAST-TCF scripts using the **cgroup** keyword. After a curve group has been defined in a FAST-TCF script it can then be used as an input to some FAST-TCF commands. Each curve group should be given a unique name within the FAST-TCF script.

Keyword	_		following word	notes
cgroup	create	name	-	Create a curve group called "name". If the name contains any spaces then it should be enclosed in quotes ("name with space")
	add	name		Adds a list of curves to the curve group called "name". If the name contains any spaces then it should be enclosed in quotes ("name with space"). The curve list should be a list of curve tags.
	remove	name		Removes a list of curves from the curve group called "name". If the name contains any spaces then it should be enclosed in quotes ("name with space"). The curve list should be a list of curve tags.

```
cgroup
                      create
                                      group_1
e.g.
       (Create a curve group called "group_1"
       cgroup
                       add
                                      group 1
                                                     curve 1
                                                                   curve 2
       (Add curves with tags "curve_1" and "curve_2" to group "group_1")
                      create
                                      "Group 2"
       cgroup
       (Create a curve group called "Group 2")
       cgroup
                       add
                                      "Group 2"
                                                      curve 1*
       Add all curves with a curve tag containing "curve_1" to group "Group 2"
       cgroup
                      remove
                                      "Group 2"
                                                      curve 11
       Remove curve with tag "curve_11" from group "Group 2"
```

To use a curve group as the input to another FAST-TCF command the curve group name is preceded by an &. If a curve group name contains spaces then the name should be enclosed in double quotes and the & should be before the first ".

```
e.g. operate multiple &group_1 10 tag output_*

(Multiple all curves in curve group "group_1" by 10 and tag the outputs as output_1, output_2 ..._)

operate multiple &"Group 2" 10 tag output_*

(Multiple all curves in curve group "Group 2" by 10 and tag the outputs as output_1, output_2 ..._)
```

Curve Groups can currently be used as

- The first curve input in all of the **operate** commands
- Within the list of curves specified as input to curve range functions.
- To select a group of curves for the display command.
- Outputting curves to T/HIS curve files and CSV files.

7.8 PERFORMING FAST-TCF CURVE OPERATIONS

Description	keyword	following words
Curve operation	oper	oper command + necessary words (depending on operation)

Many curve processing operations and functions are available. The syntax is common for all types of curve operation:

- 1. the first word is 'oper' and is followed by:
- the operation/function name e.g. ADD, INT.
- 3. the required number of arguments for the operation, e.g. ADD requires two arguments, a curve and either a curve or a value.
- 4. the remainder of the line may contain optional requests.
- 5. any optional requests can occur after the arguments.
- 6. curve numbers must be in the format: #<curve number>
- 7. An output curve is always needed for operation commands such as hic, hicd, tti, 3ms, err, the curve will be copied and the operation is executed on the copied curve.
- 8. A curve tag containing a wildcard or a curve group can be specified as the first curve input for any curve operation. If a curve tag contains a wildcard or if a curve group is specified then the curve operation will be repeated for each curve that either the tag matches or is in the curve group.

In T/HIS 9.2 onwards, the user can operate on multiple input curves (only the first curve can be multiple at the moment) using the wildcard "*". For example, to multiply all curves starting with the tag acc:

e.g. oper mul acc* 9810.0 (multiply) (on all curves with tag acc*)

7.8.1 Standard operation commands

Description	keyword	operation command	following word #1	following word #2	additional words	notes
Absolute value	oper	abs	curve #1	-	-	
Add Y	oper	add	curve #1	curve #2 or constant	-	
Add X	oper	adx	curve #1	curve #2 or constant	_	
Clip curve	oper	cli	curve #1	x min value / "auto"	x max value / "auto"	Input requires all 4 values, "auto" sets the value automatically
					y min value / "auto"	
					y max value / "auto"	
Combine	oper	com	curve #1	curve #2	-	
Concatenate	oper	cat	curve #1	curve #2	-	
Derivative	oper	dif	curve #1	-	-	
db	oper	db	curve #1	reference value		Convert a curve to dB
db(A)	oper	dba	curve #1	narrow		Apply narrow band A weighting
				octave		Apply octave band A weighting
Div Y	oper	div	curve #1	curve #2 or constant	-	
Div X	oper	dix	curve #1	curve #2 or constant	-	
Error calculation	oper	err	curve #1	curve #2	-	Value is stored with the output curve
Integral	oper	int	curve #1	-	-	
Least squares	oper	Isq	curve #1	-	-	
Мар	oper	map	curve #1	curve #2	-	
Mul Y	oper	mul	curve #1	curve #2 or constant	-	

	•						
Mul X	oper	mux	curve #1	curve #2 or constant	-		
Normalise	oper	nor	curve #1	-	-		
Octave	oper	oct	curve #1	octave	rms linea db mean linea	ei	onvert a curve from "narrow" band to ther Octave or 1/3rd Octave bands.
					db	V	alue for each band can be calculated sing either mean or RMS values, and the
				third	rms <u>linea</u>		put can either be linear or in dB.
					mean linea	ar	
					db		
Order	oper	ord	curve #1	-	-		
Reciprocal	oper	rec	curve #1	-	-		
Reverse	oper	rev	curve #1	-	-		
Rolling average	oper	r-av	curve #1	averaging window	-	or pool of If th	The averaging window is undefined r set to 0.0 then the y-values at each oint are calculated by averaging all f the proceeding curve points. The averaging window is set to Then the y-values at each point are alculated by averaging between -T/2 and +T/2.
Smooth	oper	smo	curve #1	smoothing factor	-	Fa	actor must be an integer
Stress	oper	str	curve #1	"true" or "engineering"	-		
Sub Y	oper	sub	curve #1	curve #2 or constant	-		
Sub X	oper	sux	curve #1	curve #2 or constant	-		
Translate	oper	tra	curve #1	X value	Y value		
Vector 2D	oper	v2d	curve #1	curve #2	-		
Vector mag	oper	vec	curve #1	curve #2	curve #3		
Window	oper	win	curve #1	"han", "cos", "exp"	lead in (on for "cos" option)	nly W	/rites out 2 curves
Zero curve (X and Y)	oper	zer	curve #1		-	SI	hifts curve to 0,0 (X and Y values)
Zero curve (X only)	oper	zero_x	curve #1	-	-	SI	hift curve to 0,Y (X only)
Zero curve (Y only)	oper	zero_y	curve #1	-	-	SI	hift curve to X,0 (Y only)

7.8.2 Maths operation commands

Description		operation command	following word #1	following word #2	additional words	notes
Arc cosine	oper	acos	curve #1	-	-	
Arc sine	oper	asin	curve #1	-	-	
Arc tangent	oper	atan	curve #1	-	-	
Cosine	oper	cos	curve #1	-	-	
Log base 10	oper	log10	curve #1	-	-	
Log base 10 (X)	oper	log10x	curve #1	-	-	
Natural Exp	oper	ехр	curve #1	-	-	
Natural log	oper	log	curve #1	-	-	
Natural log (X)	oper	logx	curve #1	-	-	
Power	oper	pow	curve #1	nth power	-	
Sine	oper	sin	curve #1	-	-	
Square root	oper	sqr	curve #1	-	_	
Tangent	oper	tan	curve #1	-	-	

7.8.3 Automotive operation commands

Description	keyword	operation command	following word #1	following word #2	additional words	notes
Delta V	oper	acu	curve #1	offset	time period	
Acceleration severity index	oper	asi	Accn x curve #	Accn y curve #	Accn z curve #	word6 = acceleration conversion factor word7 = x limit word8 = y limit word9 = z limit
Butterworth filter	oper	but	curve #1	cut off frequency	order	
C60 filter	oper	c60	curve #1	1	-	
C180 filter	oper	c180	curve #1	-	-	
C600 filter	oper	c600	curve #1	1	-	
C1000 filter	oper	c1000	curve #1	-	-	
Clip value	oper	cva	curve #1	time window	Label displayed on screen (optional)	Value is stored with the output curve
Exceedence	oper	exc	curve #1	auto / pos / neg	-	
Fir filter	oper	fir	curve #1	-	-	
Hic	oper	hic	curve #1	division scale factor	time period	Value is stored with the output curve
Hicd	oper	hicd	curve #1	division scale factor	time period	Value is stored with the output curve
Neck injury criteria	oper	nij	Shear curve #	Axial curve #	Moment curve #	word6 = Fzc tension word7 = Fzc compression word8 = Myc flexion word9 = Myc extension word10 = Distance from joint
Regularise	oper	reg	curve #1	new dt value	-	
THIV	oper	thi	Accn x curve #	Accn y curve #	Yaw rate curve #	word6 = Horizontal distance word7 = Lateral
						distance word8 = Head to vehicle distance
тті	oper	tti	Upper rib curve #	Lower rib curve #	Lower spine curve #	Value is stored with the output curve
Viscous criteria ECER95	oper	vc	curve #1	constant A	constant B	ECER95 method
Viscous criteria IIHS	oper	vc2	curve #1	constant A	constant B	IIHS method
Curve Correlation (strict)	oper	corr	strict	curve #1	curve #2	Value is stored with the output curves
Curve Correlation (loose)	oper	corr	loose	curve #1	curve #2	Value is stored with the output curves
Weighted Integrated Factor Curve Correlation (WIFAC)	oper	wif	curve #1	curve #2	-	Value is stored with the output curve

7.8.4 Seismic operation commands

Description					additional words	notes
Accn to disp spectra	oper	ad	curve #1	-	-	
Accn to vel spectra	oper	av	curve #1	-	-	
Disp to vel spectra	oper	dv	curve #1	-	-	
Disp to accn spectra	oper	da	curve #1	-	-	
Vel to disp spectra	oper	vd	curve #1	-	-	

Vel to accn spectra	oper	va	curve #1	-	-	
Baseline correction	oper	blc	curve #1	-		
Design spectrum	oper	ds	curve #1	broadening factor	1	
FFT	oper	fft	curve #1	ī		
Non cumulative P.R.	oper	ncp	curve #1	curve #2		
Response spectrum	oper	rs	curve #1	damping factor		Sampling must be either 30 or 70

7.8.5 Range of curve operation commands

Description			following word #1	following word #2	additional words	notes
Average	oper	ave	curve #1	curve #2 to curve #n	##	"##" ends the curve list
Envelope	oper	env	curve #1	curve #2 to curve #n	##	"##" ends the curve list
Minimum	oper	min	curve #1	curve #2 to curve #n	##	"##" ends the curve list
Maximum	oper	max	curve #1	curve #2 to curve #n	##	"##" ends the curve list
Resultant	oper	res	curve #1	curve #2 to curve #n	##	"##" ends the curve list
Sum	oper	sum	curve #1	curve #2 to curve #n		"##" ends the curve list
Sum	oper	sum	curve #1	curve #2 to curve #n		"##" ends the curve list

7.9 APPLYING EXTRA OPTIONS TO DATA REQUESTS

Extra options can be used after a data component extraction, or a curve operation. After the basic request for a particular component and particular entity have been made, the following extra data on the line is recognised to manipulate the curve further. This includes options to label a curve, scale it, write it out and so on.

Each request is executed in the order on the line, if the curve label is used, it must be the last input on the line.

```
accel mag xsc 1000 ysc 0.0001
                                                                                      lab Head Accn
      no 54
                                                                 hic
e.g.
       (node i.d. 54)
                      (accel mag)
                                                                 (obtain hic value)
                                                                                      (curve label)
                                   (scale x and y)
                                                                 append output.cur
       no 1
                      accel mag filter c60
                                   (filter with C60)
       (node i.d. 1)
                      (accel mag)
                                                                 (append the curve to a file)
       no 1
                      accel mag tag node 1 acc
                                   (tag the curve "node_1_acc" for ease of use later in the script)
       (node i.d. 1)
                      (accel mag)
```

Description	extra option word	following word #1	following word #2	notes
3ms clip	3ms	-	-	Curve is squared and then square rooted to remove -ve values Curve is truncated around 3ms values - only 3ms part is left
Append into file	арр	filename	-	Appends into curve file, if it doesn't exist - create it
Combine	com	curve #2	-	Y-value curve #1 vs X-value curve #2
Copy into file	сор	filename	-	Copy will overwrite any previous instance of the file
Error function	err	curve #2	-	
HIC	hic, hic15, hicd	-	-	Curve is squared and then square rooted to remove -ve values, an identical curve is outputted
Filtering	fil	fir c60 c180 c600 c1000	<u>.</u>	
X scale factor	xsc	scale factor	-	
Y scale factor	ysc	scale factor	-	
Label	lab	label word #1	label word #2 etc	Keyword and label must be at the end of the line
Reference tag	tag	tag word	-	Invalid words: "style", "xax", "yax", "title"
ASCII file request	ASC	-	-	
LSDA file request	LSD	-	-	
THF file request	THF	-	-	
XTF file request	XTF	-	-	

7.9.1 Using extra options on multiple curve outputs

From version 9.2 onwards multiple curve outputs can be generated from one FAST-TCF input line. Unfortunately most of the extra options displayed below will NOT work on these multiple outputs. However, support has been added to allow tagging and labeling of all the multiple curves outputted in one go (see Section 7.6.2)

7.10 Setting properties for curves

The following options can be used to set up properties for curves.

7.10.1 Setting curve Labels, Titles and tags

Description	keyword	second word	third word	fourth word	notes
Curve Label	lab	curve # or tag	label word 1	label word 2 etc	Specifies a new curve label
Curve Tag	tag	curve # or tag	tag	-	Specifies a new curve tag
Curve Title	tit	curve # or tag	label word 1	label word 2 etc	Specifies a new curve title
Curve X axis label	xla	curve # or tag	label word 1	label word 2 etc	Specifies a new x -axis label
Curve Y axis label	yla	curve # or tag	label word 1	label word 2 etc	Specifies a new y-axis label
1st Y axis	y1	curve # or tag	1	-	puts the curve on the 1st y axis
2nd Y axis	y2	curve # or tag		-	puts the curve on the 2nd y axis
User defined model prefix	prefix	model	model # or 'all'	"prefix string"	sets the user defined model prefix

From version 9.4 onwards curve properties such as the minimum and maximum values can be displayed in the legend area as well as within the graph area.

The following commands use a new properties keyword and can be used to specify the font, colour and background used to display values as well as selecting which values are displayed on each curve.

Keyword	2nd word	3rd word	4th word	5th word	6th word	7th word	notes
properties	ties format	font	hm hb cm cb tm tb default	8 10 12 14 18 24 default	standard colour	-	sets up font used to display curve properties fonts available: hm - helvetica medium cb - courier bold tm - times new roman medium etc font sizes in pt: 8, 10, 12 etc
		background	standard colour	-	-	-	Set a background colour for the text
		transparency	integer (0-100)		-	-	Set the background transparency
		border	standard colour	on/off	-	-	Set a border colour round the text and turn it on/off
		arrow	on/off	-	-	-	Turn on/off a line connecting the text to the min/max value location
		num	y_only	-	=	-	Only display the y value
		num	x_y	-	-	-	Display both the x and y values on a single line
		num	ху	-	-	-	Display both the x and y values on separate lines
		value	<type></type>	-	-	-	Set the unit format to one of automatic, general, scientific for graph (n)
		precision	m	-	-	-	Set the number of decimal places displayed for the y axis values to (m) in graph (n)
properties	legend	format	off	-	-	-	Turn off the display of curve values in the legend area
			append	-	-	-	Append curve values (min,max,average) to the curve labels in the legend.
			2nd	1	-	-	Add a 2nd line to the legned for each curve containing the curve values (min,max,average).
		curve #1	curve #2	##	maximum minimum average other	on/off	Turn on/off the display of one of the following curve properties in the legend. Input one or more curves and terminate the list with ## maximum - display curve maximum value minimum - display curve minimum value average - display curve average value other - display other curve values

	Í	i	i	1	i		
properties	curves	format	off	-	-	-	Turn off the display of cuvre values in the graph area
			summary	-	-	-	Display the minimum/maximum value for all of the curves currently visible
			all	-	-	•	Display minimum/maximum values for each curve that is currently visible
		summary	smaximum sminimum Imaximum Iminimum	on/of	-	-	Turns on/off the display of one of the following curve summary properties smaximum - highlight the maximum value for all the curves displayed sminimum - highlight the minimum value for all the curves displayed lmaximum - label the maximum vlaue for all the curves displayed lminimum - label the minimum vlaue for all the curves displayed
		curve #1	curve #2	##	smaximum sminimum Imaximum Iminimum other	on/off	Turns on/off the display of one of the following curve summary properties. Input one or more curves and terminate the list with ## smaximum - highlight the maximum value for each curves sminimum - highlight the minimum value for each curves Imaximum - label the maximum vlaue for each curves Iminimum - label the minimum vlaue for each curves other - label other curve values

7.11 Defining Datums

7.11.1 Creating Datum Definitions

The following options can be used to setup DATUM definitions

keyword	second word	notes	
start datum		Starts a Datum definition	
acronym	acronym	Specifies the datum acronym	
label	label	Specifies the datum label	
type	constant_x	Defines the datum as a constant x value	
	constant_y	Defines the datum as a constant y value	
	constant_y2	Defines the datum as a constant y2 value	
	Points	Defined the datum as a set of x,y points	
value	value	Specifies the value for a constant x or y datum	
num_points	#points x1,y1 y2,y2	pecifies the number of points used to define a datum, followed by pairs of x,y values.	
line_colour	colour (see Section 7.12.1.2)	Specify the line colour used to display the datum line (or none)	
line_style	style (see Section 7.12.1.1)	Specifies the line style used to display the datum line (or none)	
line_width	width (see Section 7.12.1.3)	Specifies the line width used to display the datum line (or none)	
fill_colour1	colour (see Section 7.12.1.2)	Defines the colour used to fill above/right of the datum line	
fill_colour2	colour (see Section 7.12.1.2)	Defines the colour used to fill below/left of the datum line	
label_font		Define the font used to display the label	
label_size	8,10,12,14,18,24	efine the font used to display the label efine the font point size used to display the label	
label_colour	colour (see Section 7.12.1.2)	Define the colour used to display the label	
label_position	Above Centre	Position label at centre above line	
	Above Left	Position label on left above line	
	Above Right	Position label on right above line	
	Below Centre	Position label at centre below line	
	Below Left	Position label on left below line	
	Below Right	Position label on right below line	
	None	Turn off label display	
	Middle Left	Position label on left in middle	
	Top Left	Position label on left at top	
	Bottom Left	Position label on left at bottom	
	Middle Right	Position label on right in middle	
	Top Right	Position label on right at top	
	Bottom Right	Position label on right in middle	
label_point	point number	Position label at datum point	
end_datum		Ends a Datum definition.	
	N 1 C '	the "stort detum" kayyard and and with a "and detum" kayyard. Any lines	

Each DATUM definition must start with a "start_datum" keyword and end with a "end_datum" keyword. Any lines between a "start_datum" and "end_datum" keyword that do not form part of a datum definition are ignored.

The following creates a DATUM definition at Y=1000.0 with a label "Hic Limit", the area below the line is filled in GREEN and the area above is filled in RED.

START_DATUM
ACRONYM datum_1
LABEL Hic Limit
TYPE constant_y
VALUE 1000.000000
LINE_COLOUR green
LINE_STYLE solid
LINE_WIDTH normal
FILL_COLOUR_1 red
FILL_COLOUR_2 green
LABEL_FONT default
LABEL_SIZE automatic
LABEL_COLOUR foreground
LABEL_POSITION default
END_DATUM

Alternatively a *.dtm file can be read in using the 'inc' keyword, e.g.

inc C:\my datum file.dtm

7.11.2 Adding Datum Lines to Graphs

Multiple DATUM definitions can be added to each graph using the datum acronym

K	eyword	2nd word	3rd word	notes	
da	itum	add	acronym	Adds the datum with the acronym to the currently selected graphs	

datum add maximum Add datum with the acronym "maximum" to all selected graphs

datum add maximum Add datum with the acronym "maximum" to graph 1 (currently selected)

datum add minimum Add datum with the acronym "minimum" to graph 1 (currently selected)

7.11.3 Removing Datum Lines from Graphs

Multiple DATUM definitions can be added to each graph using the datum acronym

Keyword	2nd word	3rd word	notes
datum	remove	acronym	Removes the datum with the acronym from the currently selected graphs

datum remove maximum Remove datum with the acronym "maximum" from all selected graphs

datum remove maximum

Remove datum with the acronym "maximum" from graph 1 (currently selected)

Remove datum with the acronym "minimum" from graph 1 (currently selected)

7.12 FAST-TCF IMAGE OUTPUT OPTIONS

The options to generate images can be split into 5 sections:

Setting Curve Style
Setting Curve Styles by Model
Plot setup
Curve Display
Image Generation

7.12.1 Setting Curve Styles

Description	keyword	second word	following words
Plot style setup	style	style name	style options
Individual curve style	stylec	curve number or tag	style options

This section explains how to set up the styles for the curves in a plot. The two types of syntax available in the table above effect when and how the curves are styled.

The "plot style setup" (keyword style) allows the user to define a plot-specific styling that applies the styles to the curves only when they are requested for a plot. It is independent of the curve id, but dependent on the order the curves are requested in the plot command. The style is given its own "tag" which the user can request on the image FAST-TCF line.

This is useful for producing plots from FAST-TCF that all have the same curve appearance. For the following words, each space represents a new curve style definition. The styles for each curve are defined by the type keywords below, separated by commas.

e.g. style ENERGIES solid, green, norm dash, blue, heavy sol, W5, yel, 500 (style name) (curve #1) (curve #2) (curve #3)

When a plot is requested, FAST-TCF will apply the curve styles to the list of curves (in order) in the plot. So in the example above, the first curve would appear green, the second curve blue and the third yellow.

The "individual curve style" (keyword stylec) is the more traditional way of styling a curve that a T/HIS user would be more familiar with - FAST-TCF styles the single curve id instantly. The user can only define one style at a time.

e.g. stylec #12 solid, green, W9 (style curve number 12) style to apply

7.12.1.1 Line Styles

Style options	word options	default
Line style	solid	solid
	dash	
	none	

7.12.1.2 Line Colours

Style options	word options	default
Line colour	white	dependent on curve #
	red	
	green	
	blue	
	cyan	
	magenta	
	yellow	
	orange	
	turquoise	
	indigo	
	lime	
	sky	
	pink	
	black	
	foreground	
	background	

7.12.1.3 Line Width

Style options	word options	default
Line width	fine	normal
	normal	
	bold	
	heavy	

7.12.1.4 Line Symbols

Style options	word options	default
Line symbols	triangle	dependent on curve #
	square	
	diamond	
	hourglass	
	cross	
	circle	
	star	
	dot	
	null	
Symbol frequency	frequency number	-

7.12.2 Setting Curve Styles by Model

From version 11 onwards a new option can be used to colour all of the curves belonging to a model in a single operation.

Description	keyword	second word	following words
Colour curves by model	style_m	model number	style options

The available style options are exactly the same as for the stylec command (see Section 7.12.1)

e.g. style_m 2 solid,green,norm

model number 2 style to apply

would set all the curves belonging to model 2 to solid, green lines using the default line thickness.

7.12.3 Plot setup

Description	keyword	following words
Plot setup	setup	plot setup words

These options set the appearance of any plots that are created afterwards. They are to do with the general appearance of the plot rather than the curve itself. The curve appearances can be set up with the style definition line and on the image plotting line. All following words must be on the same line. If the "on" or "off" is missed out from the following word (where applicable) then FAST-TCF will take the **opposite** to the default (this helps with backwards compatibility issues but can also make a script more compact).

e.g.	setup	ax bold	grid on	line bold	reverse
		(bold axes)	(grid on)	(bold lines)	(reverse foreground and background)
	setup	double on	border off	show 3ms	size 250
		(double axes on)) (no border)	(3ms window on)	$(size = 1000 \times 650 \text{ pixels})$
	setup	fonts title	hb 24 red		
		(title: helvetica l	bold 24pt, in red)		

Plot setup description	plot setup word	following word(s)	notes
Axis thickness	ax	fine	for colours - see standard list below
		normal	
		bold	
		heavy	
		standard colour	
Background	bac	standard colour	for colours - see standard list below
Border	bo	fine	for colours - see standard list below
		normal	
		bold	
		heavy	
		standard colour	
		on or off	
Double yaxis	do	on or off	
Fix line styles	fix	on or off	this overwrites any style definitions
Fonts	fon	[xl]abel hm hb 10 cm 12 cm 12 km lb	sets up fonts for the image: fonts available: hm - helvetica medium cb - courier bold tm - times new roman medium etc font sizes in pt: 8, 10, 12 etcfor colours - see standard list below
Foreground	for	standard colour	for colours - see standard list below
Format style	fo	default	
		automatic	
		full	
Grid on	gr	fine	
		normal	
		bold	
		heavy	
		on or off	
Line thickness	li	on	Turn on plotting of curve lines
		off	Turn off plotting of curve lines (symbols drawn)
		fine	set the line thickness to 1 pixel
		normal	set the line thickness to 2 pixels
		bold	set the line thickness to 4 pixels

Model numbers on labels.	mn	auto		Adds a "model" prefix to the entity IS.		
Model Humbers on labers.		on		Adds a model prefix to the entity 15.		
		off		If set to the "auto" only puts the model number on when there is more than 1 model in T/HIS		
Model prefix format	prefix	id		Set the model prefix to the model ID		
		dir		Set the model prefix to the job directory		
		thf		Set the model prefix tot eh amne fof the base THF/model file		
		user		Set the modle prefix to the user defined one.		
Reverse black white	re	on or off				
Size of plot	si	integer		xsize = value x 4, ysize = value x 3 (aspect fixed)		
Solid x and y axis	so	on or off				
Symbols on	sy	on or off				
X grid controls	xau	-				
	xin	x grid increment				
	xoff	x grid offset				
Y grid controls	yau	-				
	yin	y grid increment				
	yoff	y grid offset				
Axis type,	xlin	-		Swap the x axis to a linear scale		
Linear/Logarithmic	xlog	-		Swap the x axis to a logarithmic scale		
	ylin	-		Swap the y axis to a linear scale		
	ylog	-		Swap the y axis to a logarithmic scale		
	y2lin	-		Swap the second y axis to a linear scale		
	y2log	-		Swap the second y axis to a logarithmic scale		
Axis display	axis	top	on or off	Turns ON/OFF display of graphs TOP axis		
	axis	bottom	on or off	Turns ON/OFF display of graphs RIGHT axis		

Plot setup description	plot setup word	following word(s)	notes
Graph Ttitle	title	"title string"	Set the title for the graph.
	title_on	-	Turn on the display of the graph title
	title_off	-	Turn off the display of the graph title
X Axis Properties	x_lab	auto	Set the x axis label to be defined automatically
		manual	Set the x axis label to a user defined label
		"label string"	Set the user defined x axis label
		on	Turn on the display of the x axis label
		off	Turn off the display of the x axis label
	x_min x_max	auto	Set the x axis minimum value to automatic
		numerical value	Set the x axis minimum value
		auto	Set the x axis minimum value to automatic
		numerical value	Set the x axis minimum value
	x_unit	auto	Set the x axis unit label to be defined automatically
		manual	Set the x axis unit label to a user defined label
		"unit string"	Set the user defined x axis label
		on	Turn on the display of the x axis unit label
		off	Turn off the display of the x axis unit label

Y Axis Properties	y_lab	auto	Set the views label to be defined automatically			
I Axis Floperties	y_iab	manual	Set the y axis label to be defined automatically Set the y axis label to a user defined label			
		"label string"	Set the user defined v axis label			
		on -#	Turn on the display of the y axis label			
		off	Turn off the display of the y axis label			
	y_min	auto	Set the y axis minimum value to automatic			
		auto_visible	Set the y axis minimum to the automatic value based on the visible part of the x-axis.			
		numerical value	Set the y axis minimum value			
	y_max	auto	Set the y axis maximum value to automatic			
		auto_visible	Set the y axis maximum to the automatic value based on the visible part of the x-axis.			
		numerical value	Set the y axis maximum value			
	y_ranges	auto	Set the y and y2 axis minimum and maximum values to automatic			
		auto_visible	Set the y and y2 axis minimum and maximum to the automatic values based on the visible part of the x-axis.			
		y_auto	Set the y axis minimum and maximum values to automatic			
		y_auto_visible	Set the y axis minimum and maximum to the automatic values based on the visible part of the x-axis.			
	y_unit	auto	Set the y axis unit label to be defined automatically			
	,_	manual	Set the y axis unit label to a user defined label			
		"unit string"	Set the user defined y axis label			
		on	Turn on the display of the y axis unit label			
		off	Turn off the display of the y axis unit label			
2nd Y Axis Properties	y2_lab	auto	Set the second y axis label to be defined automatically			
·	yias	manual	Set the second y axis label to a user defined label			
		"label string"	Set the user defined second y axis label			
		on	Turn on the display of the second y axis label			
		off	Turn off the display of th seconde y axis label			
	y2_min	auto	Set the second y axis minimum value to automatic			
	, _	auto_visible	Set the second y axis minimum to the automatic value based on the visible part of the x-axis.			
		numerical value	Set the second y axis minimum value			
	y2_max	auto	Set the second y axis maximum value to automatic			
	,	auto_visible	Set the second y axis maximum to the automatic value based on the visible part of the x-axis.			
		numerical value	Set the second y axis maximum value			
	y_ranges	auto	Set the y and y2 axis minimum and maximum values to automatic			
)_ * 3**	auto_visible	Set the y and y2 axis minimum and maximum to the automatic values based on the visible part of the x-axis.			
		v2 auto	Set the second y axis minimum and maximum values to automatic			
		y2_auto_visible	Set the second y axis minimum and maximum to the automatic values based on the visible part of the x-axis.			
	y2_unit	auto	Set the second y axis unit label to be defined automatically			
	_	manual	Set the second y axis unit label to a user defined label			
		"unit string"	Set the user defined second y axis label			
		on	Turn on the display of the second y axis unit label			

7.12.3.1 Deprecated Plot Setup Options

The following setup commands are still supported in Version 9.4 but they have been superseded by the new "properties" keyword (see $\underline{\text{Section } 7.10}$)

Plot setup description	plot setup word	following word(s)		notes
Set colour of min/max value	min_max	standard colour		for colours - see standard list below
Show max value	show	max		Turn on/off the highlight of the Maximum Value
Show max value	show	min	off	Turn on/off the highlight of the Maximum Value
Display X value at max	show	xmax		Display x value at Maximum
Display X value at min	show	xmin		Display x value at Maximum
Display Y value at max	show	ymax		Display y value at Maximum
Display Y value at min	show	ymin		Display y value at Maximum
Show 3ms Clip Widow	show	3ms		

Show HIC Widow	show	hic	

7.12.4 Curve Display

The list of curves displayed in each graph is controlled by the **display** keyword. The list of curves can contain a mixture of curve tags, curve numbers (prefixed with #) or curve groups. If curve tags are specified in the curve list then they can contain wildcards.

keyword	second word	notes
display		The curve list can contain a mixture of curve tags, curve numbers (prefixed with #) or curve groups. If curve tags are specified in the curve list then they can contain wildcards.

The following option can be appended to the display keyword after the curve list.

Additional format	format word	following word #1	following word #2	notes
Style application	sty	style name	-	Curves have styles applied in the order they were defined

In version 9.4 the the following additional options that can be appended to the **display** keyword after the curve list are still supported although there use is not recommended. Equivalent commands have been added to the <u>Plot Setup</u> commands along with a number of new options.

Additional format		following word #1	following word #2	notes
Title	tit	title word #1		Takes following words as a title until another keyword is found
X axis options			if numeric #2 - xaxis max	Takes following words as a label until another keyword is found
		otherwise xaxis label	otherwise xaxis label	
Y axis options	ľ	if numeric #1 - yaxis min	if numeric #2 - yaxis max	Takes following words as a label until another keyword is found
		otherwise yaxis label	otherwise yaxis label	
2nd Y axis options		l . ,	if numeric #2 - yaxis max	Takes following words as a label until another keyword is found
		otherwise yaxis label	otherwise yaxis label	

```
e.g. display curve_2
curve_1

(display "curve_1" and "curve_2")

display &"Curve group 3" title SLED TEST \
curve_2 xax Time \
yax Displacement
```

(display "curve_2" and all the curves in "Curve group 3". Set the plot title and x and y axis labels.)

7.12.5 Image Generation

Many different types of image format can be outputted from FAST-TCF.

In T/HIS15.0 onwards the FAST-TCF image output options have been revised to allow multiple graphs and pages to be selected for output. The old pre 9.3 syntax (see Section 7.12.6) is still supported for existing scripts but users are strongly advised to move to the new command format where all options are prefixed with either the "display" or "image" keyword.

Description	keyword	following words
Image output	image	image options

The available image output options are

Option	keyword	format word	second word	third word	fourth word	notes
Bitmap (8 bit)	image	bit / bmp	filename	graph	all / active / 'n'	Generate an image containing all graphs / all active graphs / graph number 'n'
				page	all / current / 'n'	Generate an image for each page / the current page / page number 'n'
Bitmap (8 bit uncompressed)	image	bit_u / bmp_u	filename	graph	all / active / 'n'	Generate an image containing all graphs / all active graphs / graph number 'n'
				page	all / current / 'n'	Generate an image for each page / the current page / page number 'n'
Gif (8 bit)	image	gif	filename	graph	all / active / 'n'	Generate an image containing all graphs / all active graphs / graph number 'n'
				page	all / current / 'n'	Generate an image for each page / the current page / page number 'n'
Png (8 bit)	image	png	filename	graph	all / active / 'n'	Generate an image containing all graphs / all active graphs / graph number 'n'
				page	all / current / 'n'	Generate an image for each page / the current page / page number 'n'
Bitmap (24 bit)		bit24 / bmp24	filename	graph	all / active / 'n'	Generate an image containing all graphs / all active graphs / graph number 'n'
				page	all / current / 'n'	Generate an image for each page / the current page / page number 'n'
Pixel map (24 bit)	image	ppm / pix	filename	graph	all / active / 'n'	Generate an image containing all graphs / all active graphs / graph number 'n'
				page	all / current / 'n'	Generate an image for each page / the current page / page number 'n'
Jpeg (24 bit)	image	jpg / jpeg	filename	graph	all / active / 'n'	Generate an image containing all graphs / all active graphs / graph number 'n'
				page	all / current / 'n'	Generate an image for each page / the current page / page number 'n'
Png (24 bit)	image	png24	filename	graph	all / active / 'n'	Generate an image containing all graphs / all active graphs / graph number 'n'
				page	all / current / 'n'	Generate an image for each page / the current page / page number 'n'
Postscript	image	ps	filename	graph	all / active / 'n'	Generate an image containing all graphs / all active graphs / graph number 'n'
				page	all / current / 'n'	Generate an image for each page / the current page / page number 'n'
PDF	image	pdf	filename	graph	all / active / 'n'	Generate an image containing all graphs / all active graphs / graph number 'n'
				page	all / current / 'n'	Generate an image for each page / the current page / page number 'n'

In addition to the image formats the following image output options can also be specified

Description	keyword	second word	notes
Image resolution			Set the resolution to either the same as the screen or 2 or 4 times the screen resolution for image ouptut
Postscript /PDF resolution			Set the resolution to either the same as the screen or 2 or 4 times the screen resolution for Postscript and PDF ouptut
Plot title	ti	title string	Specify the plot title (postscript / PDF output only)
Figure Number	fi	figure number	Specify the figure number (postscript / PDF output only)
Orientation	ori	land / port	Specify the paper orientation (postscript / PDF output only)

 image ti Run number 2

(set the plot title to "Run number 2" for any following postscript or PDF images)

image ori landscape

(set the page layout to landscape for any following postscript or PDF images)

7.12.6 Pre 9.3 Image Output

The following pre T/HIS 9.3 image output commands are still supported but users are recommended to use the new format described above.

Curve styles that have been previously defined can be applied to the curves in the plot, and various other settings can be made with regards to the axes and titles.

Images that require a second yaxis need to determine which curves go on which axis. To do this, use a "##" in the curve listing to switch to the second axis. The options are described in the tables below.

Curve files can be included within the curves to plot. FAST-TCF detects a curve file to read in using the pattern string ".cur" at the end of the name. The curves are read in, styles are applied, and the image is plotted. The curves are then deleted.

The user can use wildcards ("*") in the tag names to select multiple curves for plotting.

bit d.bmp	#1 #3 CRV2	Title 2nd axis example					
	(2 curves on 1st	(2 curves on 1st yaxis and 3 on 2nd yaxis)					
bit h.bmp	#1 #3 CRV2	style ONE	xax 0 5E-3	Time	Title Head		
	(curves)	(style to apply)	(xaxis min and max)	(XLabel)	(Title)		
bit 1.bmp	#1 #100 ref	#1 #100 reference.cur line.cur #1000					
	(curves and curv	ve files to plot)		(style to ap	oply)		
bmp test.bmp	accn*						

Description	keyword	second word	following words	following words	
Bitmap	bit / bmp	filename	curve(s)	additional formatting	
Bitmap (uncompressed)	bit_u / bmp_u	filename	curve(s)	additional formatting	
Jpeg	jpg / jpeg	filename	curve(s)	additional formatting	
Pixel map	ppm	filename	curve(s)	additional formatting	
B & W postscript	post	filename	curve(s)	additional formatting	
Colour postscript	cpost	filename	curve(s)	additional formatting	

(all curves with tags beginning with "accn")

Additional format	format word	following word #1	following word #2	notes
Style application	sty	style name		Curves have styles applied in the order they were defined
Title	tit	title word #1		Takes following words as a title until another keyword is found
X axis options	xax	if numeric #1 - xaxis min		Takes following words as a label until another keyword is found
		otherwise xaxis label	otherwise xaxis label	
Y axis options	yax	if numeric #1 - yaxis min		Takes following words as a label until another keyword is found
		otherwise yaxis label	otherwise yaxis label	
2nd Y axis options	2ya	if numeric #1 - yaxis min	if numeric #2 - yaxis max	Takes following words as a label until another keyword is found
		otherwise yaxis label	otherwise yaxis label	

7.13 Outputting curve properties to text files, variables and REPORTER

These requests output a curve property (eg its maximum Y value) into a specified tabulation file, to a REPORTER variable in a text file, or into a variable within FAST-TCF.

Output type	keyword		3rd word			_		description words	Notes
Tabulation file	tab	filename		property to output	format		variable name	description	
Tabulation file append	taba	filename		property to output	format	varf	variable name	description	
Tabulation file (csv)	tabc	filename		property to output	format	varf	variable name	description	Each output is appended to the current line in the file.
Tabulation file (csv)	tabcr	filename		property to output	format	varf	variable name		Each output is appended to the current line in the file, followed by a carrage return so that the next output starts a new line.
FAST-TCF variable		variable name		property to output	format	-	-	description	
REPORTER variable		variable name		property to output	format	varf	variable name	description	
REPORTER variable append		variable name		property to output	format	varf	variable name	description	

7.13.1 Available Curve Properties

Various advanced requests can be performed (e.g. first non-zero Y, maximum in a window) and the table below describes them in more detail. Requests which require inputs (e.g. t1 and t2 of a window) take the default values in the table if the following words do not appear to be numbers, or if no following words exist.

Property to output	property word	value words	notes
Minimum x	minx	-	-
Maximum x	maxx	-	-
Minimum y	min	-	-
X at minimum y	xatmin	-	-
Y at minimum x	yatmin	-	-
Minimum y in window t1 t2	minw	t1 and t2	default t1=-1E19 and t2=+1E19
X at minimum y in window t1 t2	xminw	t1 and t2	default t1=-1E19 and t2=+1E19
Maximum y	max	-	-
X at maximum y	xatmax	-	-
Y at maximum x	yatmax	-	-
Maximum y in window t1 t2	maxw	t1 and t2	default t1=-1E19 and t2=+1E19
X at maximum y in window t1 t2	xmaxw	t1 and t2	default t1=-1E19 and t2=+1E19
Average in window t1 t2	ave	t1 and t2	default t1=-1E19 and t2=+1E19
Hic	hic	-	_
t1 of Hic window	hict1	-	-
t2 of Hic window	hict2	-	-
Hicd	hicd	-	-
t1 of Hicd window	hicdt1	-	-
t2 of Hicd window	hicdt2	-	-
3ms	3ms	-	-
t1 of 3ms window	3mst1	-	-
t2 of 3ms window	3mst2	-	-

Y at X	vatx	x value	default xvalue=-1E19
X when Y is passed after gate time	<u> </u>	y value & gate	default yvalue=-1E19,
A when it is passed after gate time	xygate	time	gate=+1E19
X at first non-zero Y	xnonz	-	nonzero = 1/1000000th of curve max
X at last non-zero Y	xfail	-	nonzero = 1/1000000th of curve max
Y value at last non-zero Y	yfail	-	nonzero = 1/1000000th of curve max
TTI	tti	-	-
Error Function - Max difference & time	max_err	-	-
Error Function - Difference as a %age of reference	pc_err	-	-
Error Function - Difference as a %age of peak reference	pc_max_err	-	-
Error Function - Average Difference	av_err	-	-
Error Function - Average Difference as a %age of peak reference	av_max_err	-	-
Error Function - Area weighted difference	area_err	-	-
Error Function - Max difference & time	err	-	_
Curve Correlation Function	correlate		Returns curve correlation value

The are also variables which relate to properties of all curves rather than specific curves. In this case the 3rd word "curve #" should be replaced by "all".

Property to output	property word	value words	notes
Minimum x over all curves	all_minx	-	-
Maximum x over all curves	all_maxx	-	-
Minimum y over all curves	all_miny	-	-
X at minimum y over all curves	all_xatmin	-	-
Maximum y over all curves	all_maxy	-	-
X at maximum y over all curves	all_xatmax	-	-
Curve number of curve containing minimum y over all curves	all_catmin	-	-
Curve number of curve containing maximum y over all curves	all_catmax	-	-

7.13.2 Writing out curve properties to a text "tabulation" file

This is achieved using the "tabulation" command. This automatically overwrites any existing file in the output directory, but only on the **first occurrence** in the input script. If this is not desired then use the "taba" command which will append an existing file on the first tab call.

A 9.2 onwards option is the "tabc" command, which appends the data into csv format on the last line in the file. The first call to this command writes a **new line** to the file, and the subsequent calls append the end of this line. This enables the user to compare runs on a line by line basis in software such as Excel.

Some examples of writing out curve properties to a text file are below:

```
tab output.txt #1
e.g.
                                                             max y of curve #1
                                            max
      (file output.txt)
                          (curve number)
                                            (maximum Y)
                                                             (description)
       tab output.txt
                         node head accn maxw
                                                              1.00E-03 30.00E-3
                                            (max Y in window) (window t1) (window t2)
       (file output.txt)
                          (curve tag)
       taba output.txt node head accn min
      (append output.txt)
                          (curve tag)
                                            (minimum Y)
```

Properties for multiple curves can be output by specifying either multiple "tab" commands or by using a curve tag containing wildcards or a curve group.

7.13.3 Writing out REPORTER variables

REPORTER can write curve properties to its reports, so FAST-TCF needs to output a text file that REPORTER can interrogate to find out the curve properties it needs. To tell FAST-TCF to output a REPORTER variable, the keyword "varr" is used (for backwards compatibility "var" is sufficient). Use "vara" to append to an existing file.

```
e.g. varr head_hic #1 hic hic result for head node
   (REPORTER variable %head_hic%) (curve number 1) (output request) (description)
e.g. vara max_y #1 max maximum y value
   (REPORTER variable %max_y%) (curve number 1) (output request) (description)
```

7.13.4 Setting up new FAST-TCF variables to contain curve properties

If you wish to use a curve property as a new variable within FAST-TCF - there are two ways you can achieve this.

- 1. Use the keyword "varf". This should be used when the user doesn't also require the value to be outputted into a text file or a REPORTER file.
- 2. Within a "tab", "taba", "tabc" or "varr" line, use the word "varf" just **before** the description words. The variable name is defined as the word after "varf".

The variable value is equal to the return value of the request. The variable can then be used in any subsequent lines of FAST-TCF.

For instance, the simplest way to set the variable MAX ACCN to the max of curve #1 is:

varf MAX ACCN #1 max

However, if the user wishes to combine writing a property to a text file and defining a variable in FAST-TCF, this syntax could be used:

tab output.txt #1 max varf MAX ACCN

7.13.5 Format

From Version 9.3 onwards the format used to display the value can be controlled by adding an optional "format" keyword after the property to be output and any additional inputs that property requires. The format should be specified directly after the "format" keyword and should use standard "C" programming syntax to specify a floating point format using either f,e,E,g or G format specifiers.

e.g.	tab output.txt	head	max	max y c	of.	curve #	1				
	(file output.txt)	(curve tag)	(maximum Y)	(description	on)						
	tab output.txt	head	max	format	%6	.3f	max	У	of	curve	#1
	(file output.txt)	(curve tag)	(maximum Y)	(format)			(desc	crip	tion)		
	tab output.txt	head	max	format	%.	3 f	max	У	of	curve	#1
	(file output.txt)	(curve tag)	(maximum Y)	(format)			(desc	erip	tion)		

Example formats

Number	Format	Output
12.3456	%5.2f	12.35
12.3456	%7.3e	1.2345e+01
12.3456	%7.3E	1.2345E+01
2345678.9	%.0f	2345678
2345678.9	%6.5g	2.3457e+06
2345678.9	%6.5G	2.3457E+06
-0.000013583	%4.3e	-1.358E-05

7.13.6 Description

From Version 9.3 onwards the description specified as part of the output for a curve property can contain the following keywords that will automatically be replaced with the corresponding curve property.

keyword	Curve Property
{tag}	FAST-TCF curve tag
{label}	Curve label
{id}	Entity ID that the curve was created from
{Model}	Model ID curve was created from

e.g.	tab output.txt	head	max	Max a	accl	of	node {	(id)			
	(file output.txt)	(curve tag)	(maximum Y)	(descri	iption)						
	tab output.txt	head	max	Model	1 {mc	del	.} max	accl	of	node	$\{id\}$
	(file output.txt)	(curve tag)	(maximum Y)	(descri	iption)						

7.14 FAST-TCF CURVE OUTPUT

Curves can be written out to either T/HIS curve files or CSV files from within a FAST-TCF script by using either the "app", "cop", "csv" or "csv2" keyword.

Description	_	second word	third word		notes
Copy into file	сор	filename	curve list	-	will overwrite any previous file
Append into file	арр	filename	curve list	-	will append any previous file
CSV file TYPE 1	CSV	filename	curve list		will overwrite any previous csv file. CSV has the format X1,Y1,X2,Y2,X3,Y3
CSV file TYPE 2	csv2	filename	curve list		will overwrite any previous csv file. CSV has the format X1,Y1,Y2,Y3 x axis interval is taken from curve #1 if all curves are chosen
				start time	will overwrite any previous csv file. CSV has the format X1,Y1,Y2,Y3 start time and interval are defined in the line

The curve list for all of these commands can contain either curve tags (with or without wildcards), curve numbers (prefixed with #), curve groups or '*' to select all curves.

```
e.g. copy output_file.cur curve_1 &"group 1"
    (Write "curve_1" and all the curves in curve group "group 1"
    to a new file "output_file.cur")
    append output_file.cur curve_1 &"group 1"
    (Append "curve_1" and all the curves in curve group "group 1" to the file "output_file.cur")
    csv output.csv curve_1* curve_2*
    (Write all curves with tags that start with "curve_1" or
    "curve_2" to a CSV called "output.csv")
```

NOTE: There is no limit to the number of curves that can be output to a file but there is a limit to the number of items that can be specified in the curve list (currently 100). If more than 100 curves are to be output to a file then a <u>curve</u> group containing all of the curves should be created and used within the curve list. Alternatively if the curves are being written to a T/HIS curve file then the first 100 curves can be output using the "cop" keyword and then additional curves can be appended to the file using the "app" keyword.

7.14.1 Specifying curves using Curve Numbers

When outputting curves to a file a range of explicit curve numbers can be specified using the syntax #start:#end. This option only applies to curve numbers because curve tag can be defined in an arbitrary order.

7.14.2 CSV files

If a CSV/CSV2 file is written out from within a FAST-TCF script then by default it will contain rows containing UNIT information for the curves if UNITS have been defined. This additional information can be turned off if it isn't required (see Section 7.5.5)

7.15 FAST-TCF ADDITIONAL

7.15.1 T/HIS preferences and additional commands

There are a number of additional commands that improve the functionality of FAST-TCF such as labeling, resetting values, tagging curves and defining variables. All following words must be on the same line. The variables section is explained in more detail <u>below</u>.

e.g. report 3ms err hic

(FAST-TCF.clp written to) (FAST-TCF.err written to) (FAST-TCF.hic written to)

define file lsda

(define lsda as default file)

copy output.cur #:

(file name) (copy curve #1 into file name)

define var date 30_Nov_2005

(define variable) (variable name) (variable value)

Description	keyword	second word	third word	fourth word	notes
Autoscale plot	ac	-	-	-	for use in interactive playback
Auto update plot	auto	on or off	-	-	whether to auto update the plot on data read / font updates and so on. Please note this is reset to ON after any font definition.
Plot graphs	plot	1	-	-	for use in interactive playback
Append into file	арр	filename	curve name	-	will append any previous file
Condense	condense	-	-	-	Condense the curve numbers
Convert	convert	on or off			Automatically convert curves from ms units to s(econds) before applying any filters and then convert back again.
Define FAST-TCF variable	def	var	name (without "\$")	value	see FAST-TCF variables section
Define error fail value	def	err	error value (integer)	-	default is 10 errors before T/HIS will stop
Define default	def	file	Isda	-	will always check that t/his can get the output from
file			ascii	-	this file, if not then the original default file will be chosen (see data extraction table). This file can still
			xtf		be overwritten on the actual input line
			thf		·
Define default	def	1:1	default title word 1	title word	
title	aer	tit	title word 1	2 etc	
Define user line	def	user	user line number (1 to 6)	font size (8 to 24)	rest of line is the label
Define surface integration	def	surf	shell / beam / thickshell	layer number	t = top, m = middle, b = bottom, or use a number for the integration point (see Section 7.4.4.3)
Define ssd component	def	ssd_comp	amplitude / angle	-	Define which value is read for each data component in a Steady State Dynamics (ssd) analysis (see Section 7.4.2.2)
CSV field	def	csv_separator	comma		used to change the field separator before reading a
separator			tab		CSV file.
			space		
Delete	del	curve #1 to curve #n	-	-	Delete curves
Exit reading file	exit	-	-	-	stops reading file here
Model set	mod	model # or "no" or "all"	-	_	sets the model number for extracting curve data
Regularise filtering	reg	time interval, or "off"	_	-	sets the auto regularise interval and turns it on, or turns it off

Report files written		3ms asi err hic thiv tti	-	-	To turn off see the reset2 keyword
Reset	reset1	-	-	-	All curves and curve tags deleted
	reset2	-	-	-	Plot setup defaulted and all style definitions removed. Report files not written
	reset3	-	-	-	Variable names and default title removed
User-defined colours			RRGGBB (6-digit hexadecimal)	_	6-digit hexadecimal format for rgb colour values.
	col_rgb	(1-6)	r g b (3 integers in range 0-255, separated by spaces)	-	Seperate integer format for rgb colour values.

7.15.2 Limits

Description	limit		
word limit per line	80 words		
include file name	150 characters		
tag length	60 characters		

7.15.3 Variables

Variable names can only have "a-z", "0-9" and "_" in them. Variables can be inserted anywhere in the script, FAST-TCF will replace any variables with their corresponding values before processing the line, for example:

```
define var output displacement
define var nod_id 12345678
define var xscale 0.001
node $nod id $output x xscale $xscale
```

converts into:

```
node 12345678 displacement x xscale 0.001
```

Variable definitions can contain several words or other variables, and these will be joined together to form the final variable value, for example:

```
define var day 31st
define var month january
define var year 2099
define var date $day _ $month _ $year
```

creates the variable date with value 31st january 2099

Because variables cannot have anything other than "a-z", "0-9" and "_" in them, it is possible to use variables within strings:

```
define var analysis run01_vers2
    read january_$analysis.cur
converts into
    read january run01 vers2.cur
```

However, sometimes the user may want to insert a variable within other alphanumeric words, in these circumstances use a "\$\$" terminator to designate the end of the variable name:

```
define var analysis xyz_run01
read $analysis$$_x.cur
```

converts into

read xyz run01 x.cur

There are several built in variables, and these depend on the system and command line used to run FAST-TCF, they can be checked on the dialogue T/HIS prints before starting:

\$run_name This is the basename of the key file in for the 1st model directory (should there be one). If a

script refers to multiple models then \$\frac{\text{run_name}N}{\text{n}}\$ (where \quad \text{N} is the model number) can be

used for each model.

\$run dir This is the full pathname of the directory containing the output files for a model. If a script refers

to multiple models then **\$run_dir**N (where **N** is the model number) can be used for each model.

\$run_title This is the title of the analysis found in the output files. If a script refers to multiple models then

\$run titleN (where N is the model number) can be used for each model.

\$ftcf_script This is the name of the FAST-TCF that is being run

\$ftcf_script_dir This is the name of the directory containing the FAST-TCF that is being run

\$ftcf_dir This is the name of the current working directory.

\$ftcf_path This is the full pathname of the current working directory.

\$ftcf_startin_dir This is the full pathname of the directory that T/HIS was started in.

FASTTCF called

Fasttcf script: C:\example\test.inp

\$FTCF_SCRIPT variable: test.inp
\$FTCF_SCRIPT_DIR variable:C:\example\
\$FTCF DIR variable: other folder

\$FTCF_PATH variable: C:\example\other_folder

\$RUN TITLE var: 1g09 : Large Test 9: Belted sled test

\$RUN_NAME var: new_lg09 \$RUN DIR var: E:\test\sled

\$RUN TITLE1 var: 1g09 : Large Test 9: Belted sled test

7.15.4 Notes and Presumptions

- Curves must be in the format: #<curve number> to differentiate between curves and constants
- · Any image will be overwritten if it already exists in the run area
- Curves are always labeled and then written to files, any other options are done in the order of input on the line
- If your line is getting too long, use a "\" to designate a continuation line FAST-TCF will then join the lines together before processing


8 Quick Find

Introduction


Quick Find can be used to search for and quickly:

- · Go to menus / functionality
- Open tutorials

It can be accessed by clicking on the magnifying glass above the model functions menu or by pressing the '#' key.

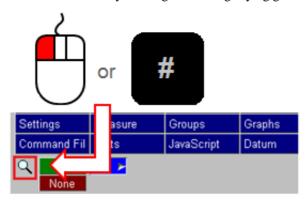

Typing in the textbox brings up a list of found items that match the entered text. Items in the list can be selected by clicking on them or by using the up and down arrow keys and pressing enter. The selected item will then perform the task, e.g. open a menu.

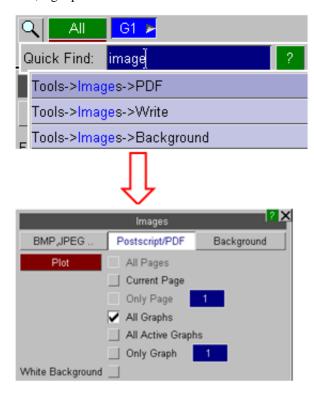

Fuzzy Matching

A 'fuzzy' matching method is used to match the entered text with the searchable items. It judges that something has matched when the characters of the entered text appear in the same order as the item that can be searched for.

For example if you type 'c60' then 'Tools->Automotive->C60' would be a match, but 'Tools->Automotive->C1000'

wouldn't because the '6' doesn't match. (Note that the search is case insensitive).



Additionally, if the entered search pattern contains spaces and the characters do not all match in the same order then T/HIS will look to see if the words can be swapped to find a match.

For example 'back image' would find 'Image->Background' even though the words do not appear in that order.


This hopefully makes it easier to find items as you do not need to know the precise search term.

The found items are listed in order of how closely they match the entered text so items that more closely match appear nearer the top of the list. It determines this by assigning a score to each match, with higher scores given to items that contain consecutively matched characters and if the characters appear at the start of words.

Search Terms

The default search term associated with a menu item is the trail of menus/buttons you would need to manually open/press, e.g. to get to the C60 filter you would need to go to Tools, then Automotive then C60, hence the search term 'Tools->Automotive->C60'.

In addition, some menus have alternative search terms associated with them. For example C60 can also be found from the alternative text 'SAE class 60 filter':

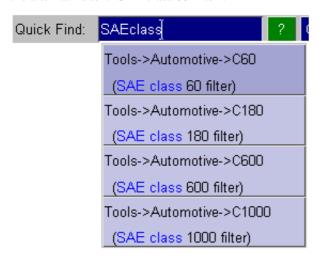


This can be useful for cases where you don't know or can't remember under which menu some functionality lives.

Note that the alternative text appears in brackets under the default search term so you can see how you would get to the menu manually.

If you can't find menus that you know exist in T/HIS it is likely that you are using different terminology to what we expect. If so, please contact Oasys Ltd and we can add alternative text based on what you are entering as your search text.

Alternative text associated with a menu may also describe some of the features on a menu. For example the text colour is set in the Display menu, but if you didn't know this it would be hard to find.


In this case the alternative text 'Text Colour' is associated with this menu:



Tutorials

The full installation of the Oasys Ltd software contains some pdf tutorials for various features within the software. They are installed in the \$OA_INSTALL/manuals/tutorials/this directory and can be found and opened using Quick Find.




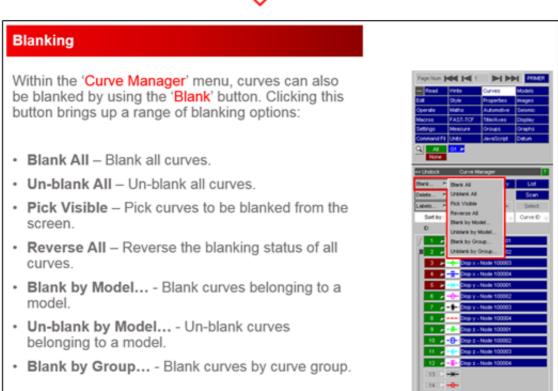

Options

There are a few options that can be set to alter how Quick Find works. These can be accessed by pressing the 'Options >>'' button.

- Save settings to the oa_pref file
- Set the text colours for matched and unmatched characters
- Recently selected items are saved by T/HIS and appear higher in the list of available options. By default the last ten selected items are saved, but this can be changed here. To turn it off set it to zero.
- Set the maximum number of found items to display in the list

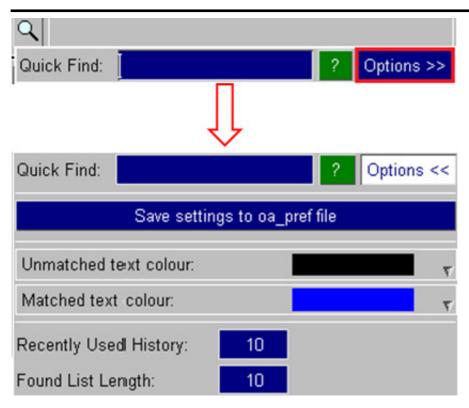

APPENDICES

- A LS-DYNA Data Components
- B T/HIS Curve File Format
- C T/HIS Bulk Data File Format
- D Filtering
- E Injury Criteria
- F Curve Correlation
- **G** The ERROR Calculation
- <u>H The "oa_pref" Preference File</u>
- I Windows File Associations
- J T-HIS JavaScript API
- K Typed Commands

APPENDIX A - LS-DYNA Data Components

A.1 Model Data Components

The following global data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
DT	Time Step	yes		yes	yes
KE	Kinetic energy	yes		yes	yes
IE	Internal energy	yes		yes	yes
SWE	Stonewall energy			yes	yes
SPE	Spring and damper energy			yes	yes
HG	Hourglass energy			yes	yes
SDE	System damping energy			yes	yes
JE	Joint internal energy			yes	yes
SIE	Sliding interface energy			yes	yes
EW	External work		yes	yes	yes
RBE	Rigid Body stopper energy			yes	
TE	Total energy	yes		yes	yes
TER	Total/initial energy ratio			yes	yes
VX	Average X velocity	yes		yes	yes
VY	Average Y velocity	yes		yes	yes
VZ	Average Z velocity	yes		yes	yes
TZC	Time per zone cycle			yes	yes
AM	Added mass			yes	yes
PM	% age Mass increase			yes	yes
EKE	Eroded Kinetic energy			yes	yes
EIE	Eroded Internal energy			yes	yes
EHG	Eroded Hourglass energy			yes	yes
ER	Energy Ratio w/o Eroded			yes	yes
DRCE	Current Distortional Kinetic Energy				yes
DRMX	Maximum Distortional Kinetic Energy				yes
DRCO	Convergence Factor				yes
DRKE	Total Kinetic Energy				yes

A.2 Part Data Components

For Parts the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
KE	Kinetic energy	yes		yes	yes
IE	Internal energy	yes		yes	yes
HG	Hourglass energy			yes	yes
TE	Total energy	yes		yes	yes

XM	X momentum		yes	yes
YM	Y momentum		yes	yes
ZM	Z momentum		yes	yes
VX	Average X velocity	yes	yes	yes
VY	Average Y velocity	yes	yes	yes
VZ	Average Z velocity	yes	yes	yes
MA	Mass	yes	yes	yes
EIE	Eroded Internal energy		yes	yes
ER	Energy Ratio w/o Eroded		yes	yes

A.3 Part Group Data Components

For Part Groups the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
KE	Kinetic energy	yes		yes	yes
IE	Internal energy	yes		yes	yes
HG	Hourglass energy	yes		yes	yes
TE	Total energy	yes		yes	yes
MA	Mass	yes		yes	yes

A.4 Nodal Data Components

For nodes the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
TE	Temperature	yes		yes	yes
DX	X Displacement	yes		yes	yes
DY	Y Displacement	yes		yes	yes
DZ	Z Displacement	yes		yes	yes
DM	Displacement Magnitude	yes		yes	yes
VX	X Velocity	yes		yes	yes
VY	Y Velocity	yes		yes	yes
VZ	Z Velocity	yes		yes	yes
VM	Velocity Magnitude	yes		yes	yes
AX	X Acceleration	yes		yes	yes
AY	Y Acceleration	yes		yes	yes
AZ	Z Acceleration	yes		yes	yes
AM	Acceleration Magnitude	yes		yes	yes
CX	X Co-ordinate			yes	yes
CY	Y Co-ordinate			yes	yes
CZ	Z Co-ordinate			yes	yes
RX	X Rotation			yes	yes
RY	Y Rotation			yes	yes
RZ	Z Rotation			yes	yes
RM	Rotation Magnitude			yes	yes

RVX	X Rotational Velocity	yes	yes
RVY	Y Rotational Velocity	yes	yes
RVZ	Z Rotational Velocity	yes	yes
RVM	Rotational Velocity Magnitude	yes	yes
RAX	X Rotational Acceleration	yes	yes
RAY	Y Rotational Acceleration	yes	yes
RAZ	Z Rotational Acceleration	yes	yes
RAM	Rotational Acceleration Magnitude	yes	yes
FLX	X Thermal Flux	yes	yes
FLY	Y Thermal Flux	yes	yes
FLZ	Z Thermal Flux	yes	yes
FLM	Thermal Flux Magnitude	yes	yes

Frequency Domain Analysis

For a steady state dynamic analysis (SSD) the following nodal data components are available. For each data component both amplitude and phase angle data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
DX	X Displacement			yes	
DY	Y Displacement			yes	
DZ	Z Displacement			yes	
VX	X Velocity			yes	
VY	Y Velocity			yes	
VZ	Z Velocity			yes	
AX	X Acceleration			yes	
AY	Y Acceleration			yes	
AZ	Z Acceleration			yes	

For a random vibration analysis (PSD) the following nodal data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
DX	X Displacement	yes		yes	yes
DY	Y Displacement	yes		yes	yes
DZ	Z Displacement	yes		yes	yes
DM	Displacement Magnitude	yes		yes	yes
VX	X Velocity	yes		yes	yes
VY	Y Velocity	yes		yes	yes
VZ	Z Velocity	yes		yes	yes
VM	Velocity Magnitude	yes		yes	yes
AX	X Acceleration	yes		yes	yes
AY	Y Acceleration	yes		yes	yes
AZ	Z Acceleration	yes		yes	yes
AM	Acceleration Magnitude	yes		yes	yes

Only nodes that have been declared in "nodal time-history blocks" will be available for processing. To get a list of available node numbers in command line mode use the M(enu) command.

Coordinate system of results

All nodal results are in the global cartesian coordinate system **except** at nodes which have been defined as accelerometers: these report accelerations in the local coordinate system of the accelerometer subject to any rotations its "parent" rigid body has undergone.

A.5 Solid Data Components

For solids the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
Stress com	ponents		-	-	
SXX	Stress in XX	yes		yes	
SYY	Stress in YY	yes		yes	
SZZ	Stress in ZZ	yes		yes	
SXY	Stress in XY	yes		yes	
SYZ	Stress in YZ	yes		yes	
SZX	Stress in ZX	yes		yes	
SMX	Maximum Principal Stress	yes		yes	
SMN	Minimum Principal Stress	yes		yes	
SMS	Maximum Shear Stress	yes		yes	
SVM	Von Mises Stress	yes		yes	
SAV	Average Stress (Pressure)	yes		yes	
STR	Stress Triaxiality Factor	yes		yes	
Strain com	ponents				
EFF	Effective Plastic Strain	yes		yes	
EXX	Strain in XX	yes		yes	
EYY	Strain in YY	yes		yes	
EZZ	Strain in ZZ	yes		yes	
EXY	Strain in XY	yes		yes	
EYZ	Strain in YZ	yes		yes	
EZX	Strain in ZX	yes		yes	
EMX	Maximum Principal Strain	yes		yes	
EMN	Minimum Principal Strain	yes		yes	
EMS	Maximum Shear Strain	yes		yes	
EVM	Von Mises Strain	yes		yes	
EAV	Average Strain	yes		yes	
"Extra" co	mponents				
SOEn	Extra Data Component	yes		yes	

Frequency Domain Analysis

For a steady state dynamic analysis (SSD) the following nodal data components are available. For each data component both amplitude and phase angle data components are available.

		THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII			
Stress componen	Stress components							

SXX	Stress in XX		yes	
SYY	Stress in YY		yes	
SZZ	Stress in ZZ		yes	
SXY	Stress in XY		yes	
SYZ	Stress in YZ		yes	
SZX	Stress in ZX		yes	
Strain com	ponents			
EXX	Strain in XX		yes	
EYY	Strain in YY		yes	
EZZ	Strain in ZZ		yes	
EXY	Strain in XY		yes	
EYZ	Strain in YZ		yes	
EZX	Strain in ZX		yes	

For a random vibration analysis (PSD) the following nodal data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
Stress com	ponents				
SXX	Stress in XX			yes	
SYY	Stress in YY			yes	
SZZ	Stress in ZZ			yes	
SXY	Stress in XY			yes	
SYZ	Stress in YZ			yes	
SZX	Stress in ZX			yes	
SVM	Von Mises Stress			yes	
Strain com	ponents				
EXX	Strain in XX			yes	
EYY	Strain in YY			yes	
EZZ	Strain in ZZ			yes	
EXY	Strain in XY			yes	
EYZ	Strain in YZ			yes	
EZX	Strain in ZX			yes	

Coordinate systems of results

The stress and strain tensors are reported in the global cartesian system unless the option to output results in the part coordinate system has been used. Writing the directional strain tensor is optional in LS-DYNA: it will only appear in the menu if it is present.

"Extra" data components

The "extra" data components (SOEn) are also optional and only appear if present in the database. They are material dependent results, and are treated as scalar data of unknown type by T/HIS.

A.6 Beam Data Components

For beams the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
Basic data com	ponents		•		•
NX	Axial force	yes		yes	
NY	Shear force in Y	yes		yes	
NZ	Shear force in Z	yes		yes	
MY	Moment in Y	yes		yes	
MZ	Moment in Z	yes		yes	
MX	Torsional moment	yes		yes	
"Plastic" data	components				
EAX	Axial strain	yes			
PE1	Plastic bending energy : end 1	yes			
PE2	Plastic bending energy: end 2	yes			
RY1	Y rotation : end 1	yes			
RY2	Y rotation : end 2	yes			
RZ1	Z rotation : end 1	yes			
RZ2	Z rotation: end 2	yes			
RX	Torsional rotation	yes			
MY1	Y bending moment : end 1	yes			
MY2	Y bending moment : end 2	yes			
MZ1	Z bending moment : end 1	yes			
MZ2	Z bending moment : end 2	yes			
ACE	Axial collapse energy	yes			
IE	Internal energy	yes			
Integration Poi	nt Data				
SXX	Axial stress	yes		yes	
SXY	XY shear stress	yes		yes	
SZX	ZX shear stress	yes		yes	
EFF	Effective plastic strain	yes			
EXX	Axial strain	yes		yes	
Discrete Beams	- Only available if DISBOUT ASCII fil	e has bene writ	ten to LSDA	(binout) file.	
AXD	Axial displacement			yes	
YD	Displacement in Y			yes	
ZD	Displacement in Z			yes	
AXR	Axial rotation			yes	
YR	Rotation in Y			yes	
ZR	Rotation in Z			yes	

Frequency Domain Analysis

For a steady state dynamic analysis (SSD) the following nodal data components are available. For each data component both amplitude and phase angle data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII				
Basic data components									
NX	Axial force			yes					

NY	Shear force in Y		yes	
NZ	Shear force in Z		yes	
MY	Moment in Y		yes	
MZ	Moment in Z		yes	
MX	Torsional moment		yes	
Integration po	int data			
SXX	Axial stress		yes	
SXY	XY shear stress		yes	
SZX	ZX shear stress		yes	
EFF	Effective plastic strain		yes	
EXX	Axial strain		yes	

For a random vibration analysis (PSD) the following nodal data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII				
Basic data comp	Basic data components								
NX	Axial force			yes					
NY	Shear force in Y			yes					
NZ	Shear force in Z			yes					
MY	Moment in Y			yes					
MZ	Moment in Z			yes					
MX	Torsional moment			yes					
Integration poir	nt data								
SXX	Axial stress			yes					
SXY	XY shear stress			yes					
SZX	ZX shear stress			yes					
EFF	Effective plastic strain			yes					
EXX	Axial strain			yes					

Additional Beam Results: written if requested from LS-DYNA

In addition to the basic data components additional beam results may be output to the .THF file for both Belytschko-Schwer and Hughes-Lui beam elements. As no indication of the element type is written to the .THF file it is impossible for T/HIS to work out whether a specific element is a Belytschko-Schwer or a Hughes-Liu beam. As the element type is unknown the user must know which element type a beam is in order to extract the correct results.

Belytschko-Schwer Beams

If you have used Belytschko-Schwer beams with a resultant plastic material model the following "plastic" results will also be written out to .THF file: (Note that these data are written even if the *DATABASE_EXTENT_BINARY card field <beamip> is not set - the presence of a resultant beam material triggers their output automatically. This is not the case for Hughes-Liu data components, for which output must be requested explicitly, see below.)

Coordinate systems of results

Beam results are always output in the element local coordinate system. Only beams declared in "beam element time-history blocks" will be available.

"Extra" data components

Where "extra" results are written, and T/HIS cannot resolve unambiguously whether they are Belytschko-Schwer plastic data, or Hughes-Liu stress/strain data, it is your responsibility to interpret the results correctly.

A.7 Shell Data Components

For shells the following data components are available. These combine with directions for the data component, and in some cases a location through the shell thickness.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
Stress com	ponents			-	
SXX	Stress in XX	yes		yes	
SYY	Stress in YY	yes		yes	
SZZ	Stress in ZZ	yes		yes	
SXY	Stress in XY	yes		yes	
SYZ	Stress in YZ	yes		yes	
SZX	Stress in ZX	yes		yes	
SMX	Maximum Principal Stress	yes		yes	
SMN	Minimum Principal Stress	yes		yes	
SMS	Maximum Shear Stress	yes		yes	
SVM	Von Mises Stress	yes		yes	
SAV	Average Stress (Pressure)	yes		yes	
STR	Stress Triaxiality Factor	yes		yes	
Strain com	ponents	•		-	
EFF	Effective Plastic Strain	yes		yes	
EXX	Strain in XX	yes		yes	
EYY	Strain in YY	yes		yes	
EZZ	Strain in ZZ	yes		yes	
EXY	Strain in XY	yes		yes	
EYZ	Strain in YZ	yes		yes	
EZX	Strain in ZX	yes		yes	
EMX	Maximum Principal Strain	yes		yes	
EMN	Minimum Principal Strain	yes		yes	
EMS	Maximum Shear Strain	yes		yes	
EVM	Von Mises Strain	yes		yes	
EAV	Average Strain	yes		yes	
Force / Mo	ment components				
MX	Moment in X	yes			
MY	Moment in Y	yes			
MXY	Moment in XY	yes			
QX	Shear force in X	yes			
QY	Shear force in Y	yes			
NX	Normal force in X	yes			
NY	Normal force in Y	yes			
NXY	Normal force in XY	yes			
Miscellane	ous components	•			

T	Thickness	yes				
Ι	Internal energy density	yes				
"Extra" components						
An	Extra Data Component	yes		yes		

Frequency Domain Analysis

For a steady state dynamic analysis (SSD) the following nodal data components are available. For each data component both amplitude and phase angle data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
Stress com	ponents				
SXX	Stress in XX			yes	
SYY	Stress in YY			yes	
SZZ	Stress in ZZ			yes	
SXY	Stress in XY			yes	
SYZ	Stress in YZ			yes	
SZX	Stress in ZX			yes	
Strain com	ponents	·		-	
EXX	Strain in XX			yes	
EYY	Strain in YY			yes	
EZZ	Strain in ZZ			yes	
EXY	Strain in XY			yes	
EYZ	Strain in YZ			yes	
EZX	Strain in ZX			yes	

For a random vibration analysis (PSD) the following nodal data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
Stress com	ponents	(ustriut)			
SXX	Stress in XX			yes	
SYY	Stress in YY			yes	
SZZ	Stress in ZZ			yes	
SXY	Stress in XY			yes	
SYZ	Stress in YZ			yes	
SZX	Stress in ZX			yes	
SVM	Von Mises Stress			yes	
Strain com	ponents	•	•		
EXX	Strain in XX			yes	
EYY	Strain in YY			yes	
EZZ	Strain in ZZ			yes	
EXY	Strain in XY			yes	
EYZ	Strain in YZ			yes	
EZX	Strain in ZX			yes	

A.7.1 THF (d3thdt) File

Stress	Stress tensors are in the global cartesian system unless the option to use material axes has been invoked for orthotropic materials (CMPFLG on *DATABASE_EXTENT_BINARY). By default results are available at top and bottom integration points and mid-surface but values can be output for all through thickness integration points by using MAXINT on *DATABASE_EXTENT_BINARY
Strain	The Strain tensors output is optional. Values are in the global cartesian system unless the option to use material axes has been invoked for orthotropic materials (CMPFLG on *DATABASE_EXTENT_BINARY). Only values at the top and bottom integration points are output. T/HIS will average these values for the mid surface.
Forces & Moments	Force and moment resultants are <data> per unit width, and are written in the element local axis system. Refer to "Theory of Plates and Shells", Timoshenko, for a precise definition of these values.</data>
Extra	The "Extra History" data components will only appear in the menu if they have been selected for output (NEIPS on *DATABASE_EXTENT_BINARY). These are output for the same surfaces / integration points as the stress tensor values.

Through Thickness Integration Points (surfaces/layers)

NOTE: The top and bottom "surfaces" are **not** the outer fibres if the default Gaussian integration rules are used, but rather the outer and inner integration points. The relationship between integration point location and shell thickness depends on the number of integration points used.

The following diagram shows locations of integration points with respect to shell half-thickness (t/2) assuming the default Gaussian integration rules have been used:

No of PointsDistance of outer fibres from neutral axis as a proportion of t/2

1 0.0 (membrane)

0.906

- 2 0.577 t/2
- 3 0.775
- 4 0.861 t/2

The "top" (or outer) point is on the positive local Z side of the element neutral axis. The output of shell data from LS-DYNA will fall into one of two categories, and the "surface" options available in T/HIS depend on this.

NOTE: It is possible to use non-default integration schemes in LS-DYNA which may locate the integration points at different places. This is an advanced topic: contact Oasys Ltd for advice.

Default output case: 3 "surfaces"

In this case, regardless of how many integration points the shell elements may actually have through their thickness, LS-DYNA writes out:

Top surface: Top integration point

Centre surface: Computed neutral axis value

Bottom surface: Bottom integration point

Note that the "centre" surface here is the neutral axis value. For membrane elements all three sets of values will be the same.

Optional output case: user-defined number of integration points (maxint other than 0 or 3)

The number of through thickness integration points written to the THF file can be modified using the value of MAXINT on the *DATABASE_EXTENT_BINARY card. If this parameter is changed then all thin and thick shell output written to the THF file will have MAXINT data "slots" for integration points in the file, regardless of how many integration points a given element may have through its thickness.

If MAXINT is not 3 then the order in which data is written to the THF file is controlled by the actual number of integration points of integration points in a shell's formulation. The following table illustrates output for the case of MAXINT not equal to 3

Data slot in file	Shell with 3 Integration points		Shell with any other nunber of integration points
#1	Middle	Middle	Bottom
#2	Bottom	Bottom	
#3	Тор	Bottom + 1	
#4	zero	Top - 1	
#5	zero	Тор	Тор
#6	zero	zero	

NOTE: The THF file does NOT contain any information on the number of integration points each shell was defined with.

No explicit neutral axis value is calculated or output.

The outcome of writing more integration points than have been used in a shell formulation is undefined.

There is no guarantee that the "centre" surface in this context is the neutral axis value: this will depend upon the element integration scheme. In addition where the "centre" value has been averaged from a pair of points, when the number of layers is an even number, it will definitely not be the neutral axis value: consider plastic strain in a section in pure bending!

The ZTF file generated by PRIMER can help to resolve some of these problems.

THF File + ZTF File

If a ZTF file had been generated using PRIMER then T/HIS can use additional information from the ZTF to correctly work out the number of integration points each shell element was defined with. If an attempt is made to output data for a surface that does not exist in the THF file then T/HIS will generate a warning message and a NULL curve will be generated.

In addition to working out the correct number of through thickness integration points for each element T/HIS can also use the information in the ZTF to identify models where MAXINT has been set to a -ve number in order to generate data for multiple in-plane integration points.

Effect of plotting "Top" surface on models with MAXINT = 6 and MAXINT = 9 whit and without a ZTF file.

	01.1	MAXINT = 6, ZTF file present		MAXINT = 9, ZTF file present
Shell 1 has 4 integration points	Undefined (#int points < 6)		Undefined (#int points < 9)	Correct (int point #4)
Shell 2 has 6 integration points	Correct (int point #6)	Correct (int point #6)	Undefined (#int points < 9)	Correct (int point #6)
	Incorrect (6th integration point)	Warning message as #int points < 6	Correct (int point #9)	Correct (int point #9)

In-plane Integration Points

In some versions of LS-DYNA it is now possible to write out data for all 4 in-plane integration points for fully integrated shells by setting MAXINT on the *DATABASE_EXTENT_BINARY card to a -ve number. For example specifying a value of -8 will generate data for 8 layers each with 4 in-plane integration points. If this option is used then all the elements will be written out using this option regardless of whether they are fully integrated or not.

As there is no information in the THF to indicate that data for 4 in-plane integration points has been written to the file then the file format will be exactly the same as for an analysis with a +ve value of MAXINT 4 times larger. For example MAXINT = -8 and MAXINT = 32 will both produce THF files with 32 integration points worth of data and

there is no way for T/HIS to know which value of MAXINT was used to generate the data. The ZTF file generated by PRIMER can help to resolve this problem.

If multiple in-plane integration points are written to the THF file then they are written in the following order.

Layer 1 - in-plane int point #1 Layer 2 - in-plane int point #1 Layer n - in-plane int point #1 Layer 1 - in-plane int point #2 Layer 2 - in-plane int point #2

Layer n - in-plane int point #2 Layer 1 - in-plane int point #3

••••

NOTE: If non fully integrated shells are included in the list of elements written to the THF file then in some versions of LS-DYNA the 2nd, 3rrd and 4th in-plane values will all be zero. Care should therefore be taken if the 4 in-plane values are averaged.

In some versions of LS-DYNA the 1st in-plane integration point is correctly written out using the global axis system while the 2nd, 3rd and 4th in-plane values are written using the elements local coordinate system. Care should therefore be taken if the 4 in-plane values are averaged.

A.7.2 LSDA (binout) File

Stress	By default stress tensors are in the local element coordinate system. Values are written out for all the through thickness and in-plane integration points.
Strain	The Strain tensors output is optional. By defaul the values are in the local element coordinate systems and only values at the top and bottom integration points are output. T/HIS will average these values for the mid surface.
Forces & Moments	These are not written to the LSDA file.
Extra	By default "Extra" data components are not written to the LSDA file. Some recent versions of LS-DYNA can now write the "Extra" data components to the LSDA file if the parameters OPTION1, OPTION2, OPTION3 and OPTION4 are set on the *DATABASE_ELOUT card.

Global v Local coordinate system results

The LSDA file can contain both ELOUT and ELOUTDET data components. By default T/HIS uses the data from ELOUTDET as ELOUT only contains a subset of the data in ELOUDET.

In some versions of LS-DYNA it is possible to change the Shell and ThickShell data components written to the ELOUT so that they are defined using the Global coordinate system (see EOCS on *CONTROL_OUTPUT) instead of the default local element coordinate system If this option is used then only the ELOUT file is modified, the ELOUDET file is still written using the local element coordinate system.

If T/HIS detects that the LSDA file contains both ELOUT and ELOUDET and that they are using different coordinate systems then T/HIS will display an additional option can be used to force T/HIS to use the ELOUT file data instead of the ELOUTDET data.

Through Thickness Integration Points (surfaces/layers)

Unlike the THF file the LSDA file can contain different numbers of integration points for each element. This means that if "Top" surface is selected T/HIS can correctly identify which integration point it needs to read data from.

By default strain tensors are only written out for the top and bottom surfaces and T/HIS averages these for the mid surface values. In recent versions of LS-DYNA the parameter INTOUT on the *DATABASE_EXTENT_BINARY

card can change this so that strain tensor values are written out for all the through thickness integration points. T/HIS does not currently support these additional values.

In-plane Integration Points

By default the LSDA file will contain data for all 4 in-plane integration points for any fully integrated shells. As with the THF file by default there is no information in the LSDA file to tell the difference between a shell with 32 through thickness integration points and a shell with 8 through thickness layers and 4 in-plane points per layer. If a ZTF file written by PRIMER is present then T/HIS can use the extra information on the ZTF to work out which elements have multiple in-plane points.

If the parameter INTOUT on the *DATABASE_EXTENT_BINARY card is set then the format of the LSDA file is changed and the LSDA file then contains enough information for T/HIS to identify the shells with multiple in-plane integration points without the ZTF file.

In addition to changing the format of the LSDA file setting INTOUT on the *DATABASE_EXTENT_BINARY card also outputs strain tensor values at each in-plane integration point as well as all the through thickness layers. T/HIS does not currently support strain values from multiple in-plane integration points.

Extrapolated Stress / Strain Values

The parameter NODOUT on the *DATABASE_EXTENT_BINARY card "gaa" can be used to generate stress and strain values that have been extrapolated to the nodal positions instead of values at the elements integration points. T/HIS does not currently support these extrapolated values.

A.8 Thick Shell Data Components

For thick shells the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
Stress com	ponents	•			
SXX	Stress in XX	yes		yes	
SYY	Stress in YY	yes		yes	
SZZ	Stress in ZZ	yes		yes	
SXY	Stress in XY	yes		yes	
SYZ	Stress in YZ	yes		yes	
SZX	Stress in ZX	yes		yes	
SMX	Maximum Principal Stress	yes		yes	
SMN	Minimum Principal Stress	yes		yes	
SMS	Maximum Shear Stress	yes		yes	
SVM	Von Mises Stress	yes		yes	
SAV	Average Stress (Pressure)	yes		yes	
STR	Stress Triaxiality Factor	yes		yes	
Strain com	ponents				
EFF	Effective Plastic Strain	yes		yes	
EXX	Strain in XX	yes		yes	
EYY	Strain in YY	yes		yes	
EZZ	Strain in ZZ	yes		yes	
EXY	Strain in XY	yes		yes	
EYZ	Strain in YZ	yes		yes	
EZX	Strain in ZX	yes		yes	
EMX	Maximum Principal Strain	yes		yes	
EMN	Minimum Principal Strain	yes		yes	
EMS	Maximum Shear Strain	yes		yes	
EVM	Von Mises Strain	yes		yes	
EAV	Average Strain	yes		yes	
''Extra'' co	omponents				
An	Extra Data Component	yes		yes	

Frequency Domain Analysis

For a steady state dynamic analysis (SSD) the following nodal data components are available. For each data component both amplitude and phase angle data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII		
Stress componen	Stress components						
SXX	Stress in XX			yes			
SYY	Stress in YY			yes			
SZZ	Stress in ZZ			yes			
SXY	Stress in XY			yes			

SYZ	Stress in YZ				yes		
SZX	Stress in ZX				yes		
Strain com	Strain components						
EXX	Strain in XX				yes		
EYY	Strain in YY				yes		
EZZ	Strain in ZZ				yes		
EXY	Strain in XY				yes		
EYZ	Strain in YZ				yes		
EZX	Strain in ZX				yes		

For a random vibration analysis (PSD) the following nodal data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
Stress com	ponents				
SXX	Stress in XX			yes	
SYY	Stress in YY			yes	
SZZ	Stress in ZZ			yes	
SXY	Stress in XY			yes	
SYZ	Stress in YZ			yes	
SZX	Stress in ZX			yes	
SVM	Von Mises Stress			yes	
Strain com	ponents				
EXX	Strain in XX			yes	
EYY	Strain in YY			yes	
EZZ	Strain in ZZ			yes	
EXY	Strain in XY			yes	
EYZ	Strain in YZ			yes	
EZX	Strain in ZX			yes	

A.8.1 THF (d3thdt) File

Stress tensors are in the global cartesian system unless the option to use material axes has been invoked for orthotropic materials (CMPFLG on *DATABASE_EXTENT_BINARY). By default results are available at top and bottom integration points and mid-surface but values can be output for all through thickness integration points by using MAXINT on *DATABASE_EXTENT_BINARY
The Strain tensors output is optional. Values are in the global cartesian system unless the option to use material axes has been invoked for orthotropic materials (CMPFLG on *DATABASE_EXTENT_BINARY). Only values at the top and bottom integration points are output. T/HIS will average these values for the mid surface.
The "Extra Historyl" data components will only appear in the menu if they have been selected for output (NEIPS on *DATABASE_EXTENT_BINARY). These are output for the same surfaces / integration points as the stress tensor values.

Through Thickness Integration Points (surfaces/layers)

NOTE: The top and bottom "surfaces" are **not** the outer fibres if the default Gaussian integration rules are used, but rather the outer and inner integration points. The relationship between integration point location and shell thickness depends on the number of integration points used.

The following diagram shows locations of integration points with respect to shell half-thickness (t/2) assuming the

default Gaussian integration rules have been used:

No of PointsDistance of outer fibres from neutral axis as a proportion of t/2

- 1 0.0 (membrane)
- 2 0.577 t/2
- 3 0.775
- 4 0.861 t/2 5 0.906

The "top" (or outer) point is on the positive local Z side of the element neutral axis. The output of shell data from LS-DYNA will fall into one of two categories, and the "surface" options available in T/HIS depend on this.

NOTE: It is possible to use non-default integration schemes in LS-DYNA which may locate the integration points at different places. This is an advanced topic: contact Oasys Ltd for advice.

Default output case: 3 "surfaces"

In this case, regardless of how many integration points the shell elements may actually have through their thickness, LS-DYNA writes out:

Top surface: Top integration point

Centre surface : Computed neutral axis value

Bottom surface: Bottom integration point

Note that the "centre" surface here is the neutral axis value. For membrane elements all three sets of values will be the same

Optional output case: user-defined number of integration points (maxint other than 0 or 3)

The number of through thickness integration points written to the THF file can be modified using the value of MAXINT on the *DATABASE_EXTENT_BINARY card. If this parameter is changed then all thin and thick shell output written to the THF file will have MAXINT data "slots" for integration points in the file, regardless of how many integration points a given element may have through its thickness.

If MAXINT is not 3 then the order in which data is written to the THF file is controlled by the actual number of integration points of integration points in a shell's formulation. The following table illustrates output for the case of MAXINT not equal to 3

Data slot in file	Thick Shell with 3 Integration points	Thick Shell with any other nunber of integration points
#1	Middle	Bottom
#2	Bottom	
#3	Тор	
#4	zero	
#5	zero	Тор
#6	zero	

NOTE: The THF file does NOT contain any information on the number of integration points each shell was defined with.

No explicit neutral axis value is calculated or output.

The outcome of writing more integration points than have been used in a shell formulation is undefined.

There is no guarantee that the "centre" surface in this context is the neutral axis value: this will depend upon the element integration scheme. In addition where the "centre" value has been averaged from a pair of points, when the number of layers is an even number, it will definitely not be the neutral axis value: consider plastic strain in a section in pure bending!

The ZTF file generated by PRIMER can help to resolve some of these problems.

THF File + ZTF File

If a ZTF file had been generated using PRIMER then T/HIS can use additional information from the ZTF to correctly work out the number of integration points each shell element was defined with. If an attempt is made to output data for a surface that does not exist in the THF file then T/HIS will generate a warning message and a NULL curve will be generated.

In addition to working out the correct number of through thickness integration points for each element T/HIS can also use the information in the ZTF to identify models where MAXINT has been set to a -ve number in order to generate data for multiple in-plane integration points.

Effect of plotting "Top" surface on models with MAXINT = 6 and MAXINT = 9 whit and without a ZTF file.

		MAXINT = 6, ZTF file present		MAXINT = 9, ZTF file present
	Undefined (#int points < 6)	` 1 /	Undefined (#int points < 9)	Correct (int point #4)
Thick Shell 2 has 6 integration points	Correct (int point #6)		Undefined (#int points < 9)	Correct (int point #6)
	Incorrect (6th integration point)		Correct (int point #9)	Correct (int point #9)

In-plane Integration Points

In some versions of LS-DYNA it is now possible to write out data for all 4 in-plane integration points for fully integrated shells by setting MAXINT on the *DATABASE_EXTENT_BINARY card to a -ve number. For example specifying a value of -8 will generate data for 8 layers each with 4 in-plane integration points. If this option is used then all the elements will be written out using this option regardless of whether they are fully integrated or not.

As there is no information in the THF to indicate that data for 4 in-plane integration points has been written to the file then the file format will be exactly the same as for an analysis with a +ve value of MAXINT 4 times larger. For example MAXINT = -8 and MAXINT = 32 will both produce THF files with 32 integration points worth of data and there is no way for T/HIS to know which value of MAXINT was used to generate the data. The ZTF file generated by PRIMER can help to resolve this problem.

If multiple in-plane integration points are written to the THF file then they are written in the following order.

Layer 1 - in-plane int point #1

Layer 2 - in-plane int point #1

····

Layer n - in-plane int point #1

Layer 1 - in-plane int point #2

Layer 2 - in-plane int point #2

. . . .

Layer n - in-plane int point #2

Layer 1 - in-plane int point #3

. . . .

NOTE: If non fully integrated shells are included in the list of elements written to the THF file then in some versions of LS-DYNA the 2nd, 3rrd and 4th in-plane values will all be zero. Care should therefore be taken if the 4 in-plane values are averaged.

In some versions of LS-DYNA the 1st in-plane integration point is correctly written out using the global axis system while the 2nd, 3rd and 4th in-plane values are written using the elements local coordinate system. Care should therefore be taken if the 4 in-plane values are averaged.

A.8.2 LSDA (binout) File

Stress

By default stress tensors are in the local element coordinate system. Values are written out for all the through thickness and in-plane integration points.

S		The Strain tensors output is optional. By default values are in the local element coordinate systems and only values at the top and bottom integration points are output. T/HIS will average these values for the mid surface.				
E	xtra	By default "Extra" data components are not written to the LSDA file.				
		Some recent versions of LS-DYNA can now write the "Extra" data components to the LSDA file if the parameters OPTION1, OPTION2, OPTION3 and OPTION4 are set on the *DATABASE_ELOUT card.				

Global v Local coordinate system results

The LSDA file can contain both ELOUT and ELOUTDET data components. By default T/HIS uses the data from ELOUTDET as ELOUT only contains a subset of the data in ELOUDET.

In some versions of LS-DYNA it is possible to change the Shell and ThickShell data components written to the ELOUT so that they are defined using the Global coordinate system (see EOCS on *CONTROL_OUTPUT) instead of the default local element coordinate system If this option is used then only the ELOUT file is modified, the ELOUDET file is still written using the local element coordinate system.

If T/HIS detects that the LSDA file contains both ELOUT and ELOUDET and that they are using different coordinate systems then T/HIS will display an additional option can be used to force T/HIS to use the ELOUT file data instead of the ELOUTDET data.

Through Thickness Integration Points (surfaces/layers)

Unlike the THF file the LSDA file can contain different numbers of integration points for each element. This means that if "Top" surface is selected T/HIS can correctly identify which integration point it needs to read data from.

By default strain tensors are only written out for the top and bottom surfaces and T/HIS averages these for the mid surface values. In recent versions of LS-DYNA the parameter INTOUT on the *DATABASE_EXTENT_BINARY card can change this so that strain tensor values are written out for all the through thickness integration points. T/HIS does not currently support these additional values.

In-plane Integration Points

By default the LSDA file will contain data for all 4 in-plane integration points for any fully integrated shells. As with the THF file by default there is no information in the LSDA file to tell the difference between a shell with 32 through thickness integration points and a shell with 8 through thickness layers and 4 in-plane points per layer. If a ZTF file written by PRIMER is present then T/HIS can use the extra information on the ZTF to work out which elements have multiple in-plane points.

If the parameter INTOUT on the *DATABASE_EXTENT_BINARY card is set then the format of the LSDA file is changed and the LSDA file then contains enough information for T/HIS to identify the shells with multiple in-plane integration points without the ZTF file.

In addition to changing the format of the LSDA file setting INTOUT on the *DATABASE_EXTENT_BINARY card also outputs strain tensor values at each in-plane integration point as well as all the through thickness layers. T/HIS does not currently support strain values from multiple in-plane integration points.

Extrapolated Stress / Strain Values

The parameter NODOUT on the *DATABASE_EXTENT_BINARY card can be used to generate stress and strain values that have been extrapolated to the nodal positions instead of values at the elements integration points. T/HIS does not currently support these extrapolated values.

A.9 Rigid Wall Data Components

For rigid walls the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
FN	Normal force		yes	yes	yes
FX	Global X force			yes	yes
FY	Global Y force			yes	yes
FZ	Global Z force			yes	yes

A.10 Discrete Element (Spring/Damper) Data Components

For springs and dampers the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
FT	Force		yes	yes	yes
ET	Elongation		yes	yes	yes
FE	Force versus Elongation		yes		
EN	Energy		yes		
MT	Moment		yes	yes	yes
RT	Rotation		yes	yes	yes
MR	Moment versus Rotation		yes		
FX	Global X force			yes	yes
FY	Global Y force			yes	yes
FZ	Global Z force			yes	yes
MX	Moment in X			yes	yes
MY	Moment in Y			yes	yes
MZ	Moment in Z			yes	yes

A.11 Seat Belt Data Components

For seat belts the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
FT	Force		yes	yes	yes
ST	Strain		yes		
FS	Force versus Strain		yes		
CL	Current Length			yes	yes

A.12 Retractor Data Components

For retractors the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
FT	Force		yes	yes	yes
PT	Pullout		yes	yes	yes
FP	Force versus Pullout		yes		

A.13 Slipring Data Components

For sliprings the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
PT	Pull through		yes	yes	yes

A.14 Contact Data Components

For contacts the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
FX	Master X force		yes	yes	yes
FY	Master Y force		yes	yes	yes
FZ	Master Z force		yes	yes	yes
FM	Master Force Magnitude		yes	yes	yes
FXS	Slave X force		yes	yes	yes
FYS	Slave Y force		yes	yes	yes
FZS	Slave Z force		yes	yes	yes
FMS	Slave Force Magnitude		yes	yes	yes
TEN	Total energy (Slave + Master)		yes	yes	yes
MX	Master X moment			yes	yes
MY	Master Y moment			yes	yes
MZ	Master Z moment			yes	yes
MXS	Slave X moment			yes	yes
MYS	Slave Y moment			yes	yes
MZS	Slave Z moment			yes	yes
MM	Master Mass			yes	yes
MS	Slave Mass			yes	yes
SEN	Slave side energy		yes	yes	yes
MEN	Master side energy		yes	yes	yes
FRI	Frictional energy		yes	yes	yes

A.15 Nodal Reaction Force Data Components

For nodal reactions the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
FX	X Force		yes	yes	yes
FY	Y Force		yes	yes	yes
FZ	Z Force		yes	yes	yes
FM	Force Magnitude		yes	yes	yes
EN	Energy			yes	yes
LFX	Local X force			yes	yes
LFY	Local Y force			yes	yes
LFZ	Local Z force			yes	yes

A.16 Airbag Data Components

For airbags the following data components are available. Versions of LS-DYNA 971 can also generate PART based data for AIRBAGS that use the PARTICLE airbag methods.

If $*DATABASE_CPM_SENSOR$ has been used to define sensors then the output for the sensors will also be available under the AIRBAG data components.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
Airbag con	nponents	<u>'</u>	•	•	•
PR	Pressure		yes	yes	yes
VO	Volume		yes	yes	yes
IE	Internal energy		yes	yes	yes
IN	Mass flow rate in		yes	yes	yes
OU	Mass flow rate out		yes	yes	yes
TM	Total mass		yes	yes	yes
DE	Density			yes	yes
SA	Surface area			yes	yes
TE	Gas temperature			yes	yes
RF	Reaction force			yes	yes
TK	Translational Kinetic Energy			yes	
IF	Inflator Energy			yes	
DMP	Damping Energy			yes	
PP	Average Particle Pressure			yes	
Part compo	onents				
PR	Pressure			yes	
MAF	Flow rate through fabric			yes	
MAV	Flow rate through vent			yes	
TA	Total area			yes	
UN	Unblocked area			yes	
TE	Gas temperature			yes	
PPR	Pressure s+			yes	
NPR	Pressure s-			yes	
HC	Heat Convection Energy			yes	
EV	Enhanced Vent			yes	
LE	Leak Energy			yes	
PVO	Por Volume			yes	
Airbag Cha	amber components				
PR	Pressure			yes	
VO	Volume			yes	
IE	Internal energy			yes	
IN	Mass flow rate in			yes	
OU	Mass flow rate out			yes	
TM	Total mass			yes	
DE	Density			yes	
SA	Surface area			yes	
TE	Gas temperature			yes	
RF	Reaction force			yes	
TR	Translational Energy			yes	
NP	Number of Particle			yes	

PP	Average Particle Pressure		yes	

CPM Sensor Components (*DATABASE_CPM_SENSOR)

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
X	X Co-ordinate of Sensor			yes	yes
Y	Y Co-ordinate of Sensor			yes	yes
Z	Z Co-ordinate of Sensor			yes	yes
VX	X Velocity			yes	yes
VY	Y Velocity			yes	yes
VZ	Z Velocity			yes	yes
VM	Velocity Magnitude			yes	yes
PR	Pressure			yes	yes
DE	Density			yes	yes
TE	Temperature			yes	yes
NP	N Particles			yes	yes

A.17 Joint Data Components

For joints the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
Basic Joint	ts ·	•	•	•	•
FX	Global X force			yes	yes
FY	Global Y force			yes	yes
FZ	Global Z force			yes	yes
FM	Force Magnitude			yes	yes
MX	Moment in X			yes	yes
MY	Moment in Y			yes	yes
MZ	Moment in Z			yes	yes
MM	Moment Magnitude			yes	yes
General St	iffness Joints			7	
РНА	Phi angle			yes	yes
DPH	d(Phi)/dt			yes	yes
PHS	Phi stiffness moment			yes	yes
PHD	Phi damping moment			yes	yes
PHT	Phi total moment			yes	yes
THA	Theta angle			yes	yes
DTH	d(Theta)/dt			yes	yes
THS	Theta stiffness moment			yes	yes
THD	Theta damping moment			yes	yes
THT	Theta total moment			yes	yes
PSA	Psi angle			yes	yes
DPS	d(Psi)/dt			yes	yes
PSS	Psi stiffness moment			yes	yes
PSD	Psi damping moment			yes	yes
PST	Psi total moment			yes	yes

EN	Total joint energy	yes	yes					
	Flexion Torsion Joints							
AA	Alpha angle	yes	yes					
DA	d(Alpha)/dt	yes	yes					
ALS	Alpha stiffness moment	yes	yes					
ALD	Alpha damping moment	yes	yes					
ALT	Alpha total moment	yes	yes					
BA	Beta angle	yes	yes					
DB	d(Beta)/dt	yes	yes					
BES	Beta stiffness moment	yes	yes					
BED	Beta damping moment	yes	yes					
BET	Beta total moment	yes	yes					
GA	Gamma angle	yes	yes					
DG	d(Gamma)/dt	yes	yes					
GSF	Gamma scale factor	yes	yes					
EN	Total joint energy	yes	yes					
Translation	nal Joints							
XD	X displacement	yes	yes					
DXD	d(X)/dt	yes	yes					
YD	Y displacement	yes	yes					
DYD	d(Y)/dt	yes	yes					
ZD	Z displacement	yes	yes					
DZD	d(Z)/dt	yes	yes					
XSF	X stiffness	yes	yes					
XDF	X damping	yes	yes					
XTF	X total	yes	yes					
YSF	Y stiffness	yes	yes					
YDF	Y damping	yes	yes					
YTF	Y total	yes	yes					
ZSF	Z stiffness	yes	yes					
ZDF	Z damping	yes	yes					
ZTF	Z total	yes	yes					
EN	Total joint energy	yes	yes					

A.18 Cross Section Data Components

For cross sections the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
FX	X Force			yes	yes
FY	Y Force			yes	yes
FZ	Z Force			yes	yes
RM	Force Magnitude			yes	yes
MX	Moment in X			yes	yes
MY	Moment in Y			yes	yes
MZ	Moment in Z			yes	yes
MM	Moment Magnitude			yes	yes
CX	X centroid coordinate			yes	yes
CY	Y centroid coordinate			yes	yes
CZ	Z centroid coordinate			yes	yes
AR	Area of Cross Section			yes	yes

A.19 Subsystem Data Components

For subsystems the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
KE	Kinetic energy			yes	yes
IE	Internal energy			yes	yes
HG	Hourglass energy			yes	yes
KR	Kinetic energy ratio			yes	yes
IM	Internal energy ratio			yes	yes
XM	X momentum			yes	yes
YM	Y momentum			yes	yes
ZM	Z momentum			yes	yes

A.20 Geometric Contact Data Components

For geometric contact entities the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
FX	X Force			yes	yes
FY	Y Force			yes	yes
FZ	Z Force			yes	yes
RM	Force Magnitude			yes	yes
MX	Moment in X			yes	yes
MY	Moment in Y			yes	yes
MZ	Moment in Z			yes	yes
MM	Moment Magnitude			yes	yes

A.21 Nodal Rigid Body Data Components

For nodal rigid bodies the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
DX	X Displacement			yes	yes
DY	Y Displacement			yes	yes
DZ	Z Displacement			yes	yes
DM	Displacement Magnitude			yes	yes
VX	X Velocity			yes	yes
VY	Y Velocity			yes	yes
VZ	Z Velocity			yes	yes
VM	Velocity Magnitude			yes	yes
AX	X Acceleration			yes	yes
AY	Y Acceleration			yes	yes
ΑZ	Z Acceleration			yes	yes
AM	Acceleration Magnitude			yes	yes
CX	X Co-ordinate			yes	yes
CY	Y Co-ordinate			yes	yes
CZ	Z Co-ordinate			yes	yes
RX	X Rotation			yes	yes
RY	Y Rotation			yes	yes
RZ	Z Rotation			yes	yes
RM	Rotation Magnitude			yes	yes
RVX	X Rotational Velocity			yes	yes
RVY	Y Rotational Velocity			yes	yes
RVZ	Z Rotational Velocity			yes	yes
RVM	Rotational Velocity Magnitude			yes	yes
RAX	X Rotational Acceleration			yes	yes
RAY	Y Rotational Acceleration			yes	yes
RAZ	Z Rotational Acceleration			yes	yes
RAM	Rotational Acceleration Magnitude			yes	yes
D11	Direction Cosine 11			yes	
D12	Direction Cosine 12			yes	
D13	Direction Cosine 13			yes	
D21	Direction Cosine 21			yes	
D22	Direction Cosine 22			yes	
D23	Direction Cosine 23			yes	
D31	Direction Cosine 31			yes	
D32	Direction Cosine 32			yes	
D33	Direction Cosine 33			yes	
LDX	Local X Displacement			yes	yes
LDY	Local Y Displacement			yes	yes
LDZ	Local Z Displacement			yes	yes

LVX	Local X Velocity	yes	yes
LVY	Local Y Velocity	yes	yes
LVZ	Local Z Velocity	yes	yes
LAX	Local X Acceleration	yes	yes
LAY	Local Y Acceleration	yes	yes
LAZ	Local Z Acceleration	yes	yes
LRX	Local X Rotation	yes	yes
LRY	Local Y Rotation	yes	yes
LRZ	Local Z Rotation	yes	yes
LRVX	Local X Rotational Velocity	yes	yes
LRVY	Local Y Rotational Velocity	yes	yes
LRVZ	Local Z Rotational Velocity	yes	yes
LRAX	Local X Rotational Acceleration	yes	yes
LRAY	Local Y Rotational Acceleration	yes	yes
LRAZ	Local Z Rotational Acceleration	yes	yes

A.22 Spotweld Data Components

For spotwelds the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
AX	Axial force			yes	yes
SH	Shear force			yes	yes
LE	Length			yes	yes
FT	Failure Time			yes	yes
FA	Failure			yes	yes
MM	Moment Magnitude			yes	yes
ТО	Torsion			yes	yes
The follow DCFAIL f	ving additional data components are als ile is written.	o available for Solid Sp	otwelds and S	potweld Assembl	ies if the
FF	DC Failure Function			yes	yes
NF	Normal Failure Term			yes	yes
SF	Shear Failure Term			yes	yes
BF	Bending Failure Term			yes	yes
AR	Spotweld Area			yes	yes

The DCFAIL file contains additional data for spotweld solids and clusters models using the _DAIMLERCHRYSLER version of *MAT_SPOTWELD (this version of the material does not support beam elements). The file contains additional failure data showing how close to failure the spotweld is in tension, shear, bending and torsion, in addition it contains another copy the normal spotweld forces written to the SWFORC file.

The new data components appear under the SOLID and ASSEMBLY sub types within the SPOTWELD menu. If the SWFORC file is also present then the normal forces and read from the SWFORC file, if the SWFORC file doesn't exist but the DCFAIL file does then the data components (Normal, shear forces etc) that are mirrored in the DCFAIL file are read from there instead.

As the DCFAIL file only contains the ID's and not the types or each connection then it is not possible to tell from the DCFAIL file alone which items are solids and which ones are spotweld clusters. If the SWFORC file is present then T/HIS used the information in this file to match up the ID's and work out the type of each item in the DCFAIL file. If the SWFORC file isn't present then it attempts to use the data in the ZTF file to work out the types.

A.23 SPC Data Components

For SPC's the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
FX	X Force			yes	yes
FY	Y Force			yes	yes
FZ	Z Force			yes	yes
FM	Force Magnitude			yes	yes
MX	Moment in X			yes	yes
MY	Moment in Y			yes	yes
MZ	Moment in Z			yes	yes
MM	Moment Magnitude			yes	yes

A.24 Boundary Condition Data Components

For SPC's the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
For Press	sure and Force Boundary conditions the following	g components a	re available.		
FX	Applied X Force			yes	yes
FY	Applied Y Force			yes	yes
FZ	Applied Z Force			yes	yes
FR	Applied Resultant force			yes	yes
EN	Energy from applied force			yes	yes
For Noda	al Velocity Boundary conditions the following co	omponents are a	vailable.		
FX	Boundary condition motion X Force			yes	yes
FY	Boundary condition motion Y Force			yes	yes
FZ	Boundary condition motion Z Force			yes	yes
FR	Resultant Boundary condition motion force			yes	yes
EN	Energy from Boundary condition motion			yes	yes
For Rigio	d Body Velocity Boundary conditions the follow	ing components	are available.		
FX	Boundary condition motion X Force			yes	yes
FY	Boundary condition motion Y Force			yes	yes
FZ	Boundary condition motion Z Force			yes	yes
FR	Resultant Boundary condition motion force			yes	yes
EN	Energy from Boundary condition motion			yes	yes
MX	Boundary condition motion X Moment			yes	yes
MY	Boundary condition motion Y Moment			yes	yes
MZ	Boundary condition motion Z Moment			yes	yes
MM	Boundary condition moment Magnitude			yes	yes

A.25 FSI Data Components

For Fluid structural interactions the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
PR	Pressure				yes
FX	X Force				yes
FY	Y Force				yes
FZ	Z Force				yes
FM	Force Magnitude				yes
PL	Porous Leakage				yes
MF	Mass Flux				yes
LFX	Leakage X Force				yes
LFY	Leakage X Force				yes
LFZ	Leakage X Force				yes
LFM	Leakage Force Magnitude				yes
TE	Part Temperature				yes
X	X Co-ordinate of Sensor				yes
Y	Y Co-ordinate of Sensor				yes
Z	Z Co-ordinate of Sensor				yes
PR	Pressure				yes
SO	Cpld Solid ID				yes
TE	Temperature at Sensor				yes

A.26 SPH Data Components

For SPH's the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
DE	Density			yes	yes
EXX	Strain in XX			yes	yes
EYY	Strain in YY			yes	yes
EZZ	Strain in ZZ			yes	yes
EXY	Strain in XY			yes	yes
EYZ	Strain in YZ			yes	yes
EZX	Strain in ZX			yes	yes
EFS	Effective Stress			yes	yes
SXX	Stress in XX			yes	yes
SYY	Stress in YY			yes	yes
SZZ	Stress in ZZ			yes	yes
SXY	Stress in XY			yes	yes
SYZ	Stress in YZ			yes	yes
SZX	Stress in ZX			yes	yes
SM	Smoothing Length			yes	yes

A.27 Tracer Data Components

For tracers the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
CX	X Co-ordinate			yes	yes
CY	Y Co-ordinate			yes	yes
CZ	Z Co-ordinate			yes	yes
CV	Current vector			yes	yes
VX	X Velocity			yes	yes
VY	Y Velocity			yes	yes
VZ	Z Velocity			yes	yes
VM	Velocity Magnitude			yes	yes
SXX	Stress in XX			yes	yes
SYY	Stress in YY			yes	yes
SZZ	Stress in ZZ			yes	yes
SXY	Stress in XY			yes	yes
SYZ	Stress in YZ			yes	yes
SZX	Stress in ZX			yes	yes
EFP	Effective Plastic Strain			yes	yes
DE	Density			yes	yes
RV	Relative volume			yes	yes
AC	Active			yes	yes

A.28 Pulley Data Components

For pulleys the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
FT	Force			yes	yes
SL	Slip			yes	yes
SR	Slip Rate			yes	yes
AN	Warp Angle			yes	yes

A.29 ICFD Data Components

For ICFD results the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
ICFD Nodes an	d ICFD Points				
CX	X Co-ordinate				yes
CY	Y Co-ordinate				yes
CZ	Z Co-ordinate				yes
CV	Current vector				yes
VX	X Velocity				yes

			_
VY	Y Velocity		yes
VZ	Z Velocity		yes
VM	Velocity Magnitude		yes
AVX	X AVelocity		yes
AVY	Y AVelocity		yes
AVZ	Z AVelocity		yes
AVM	AVelocity Magnitude		yes
PR	Pressure		yes
DE	Density		yes
VC	Viscosity		yes
VTX	X Vorticity		yes
VTY	Y Vorticity		yes
VTZ	Z Vorticity		yes
VTM	Vorticity Magnitude		yes
QC	Q Critical		yes
VT	Viscous Turbulence		yes
PA	P Average		yes
LS	LSet		yes
A	Alpha		yes
TE	Temperature		yes
ICFD Drag	•		•
FPX	X Pressure Drag		yes
FPY	Y Pressure Drag		yes
FPZ	Z Pressure Drag		yes
FPM	Pressure Drag Magnitude		yes
FVX	X Viscous Drag		yes
FVY	Y Viscous Drag		yes
FVZ	Z Viscous Drag		yes
FVM	Viscous Drag Magnitude		yes
MPX	MX Pressure Drag		yes
MPY	MY Pressure Drag		yes
MPZ	MZ Pressure Drag		yes
MPM	Pressure Drag Moment Magnitude		yes
MVX	MX Viscous Drag		yes
MVY	MY Viscous Drag		yes
MVZ	MZ Viscous Drag		yes
MVM	Viscous Drag Moment Magnitude		yes
ICFD Temp			
TAA	Temperature Area Average		yes
TSA	Temperature Sum Average		yes
TEH	Average Heat Flux		yes
AR	Total Area		yes

A.30 CESE Data Components

For CESE results the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
CESE Ele	ment and CESE Points			•	
CX	X Co-ordinate				yes
CY	Y Co-ordinate				yes
CZ	Z Co-ordinate				yes
CV	Current vector				yes
VX	X Velocity				yes
VY	Y Velocity				yes
VZ	Z Velocity				yes
VM	Velocity Magnitude				yes
VTX	X Vorticity				yes
VTY	Y Vorticity				yes
VTZ	Z Vorticity				yes
VTM	Vorticity Magnitude				yes
DE	Density				yes
PR	Pressure				yes
TE	Temperature				yes
CESE FSI	[Drag				
FPX	X Pressure Force				yes
FPY	Y Pressure Force				yes
FPZ	Z Pressure Force				yes
FPM	Pressure Force Magnitude				yes
CESE Seg	ment Set Drag				
FPX	X Pressure Force				yes
FPY	Y Pressure Force				yes
FPZ	Z Pressure Force				yes
FPM	Pressure Force Magnitude				yes
FVX	X Viscous Force				yes
FVY	Y Viscous Force				yes
FVZ	Z Viscous Force				yes
FVM	Viscous Force Magnitude				yes
AR	Total Area				yes

A.31 EM Data Components

For EM results the following da

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
EM Eleme	ent, EM Node and EM Points	•	•	•	
CX	X Co-ordinate				yes
CY	Y Co-ordinate				yes
CZ	Z Co-ordinate				yes
CV	Current vector				yes
ECX	X Current				yes
ECY	Y Current				yes
ECZ	Z Current				yes
ECM	Current Magnitude				yes
BFX	X BField				yes
BFY	Y BField				yes
BFZ	Z BField				yes
BFM	BField Magnitude				yes
AFX	X AField				yes
AFY	Y AField				yes
AFZ	Z AField				yes
AFM	AField Magnitude				yes
S	Sigma				yes
MUR	Mu-R				yes
JHR	JHRate				yes
LFX	X Lorentz Force				yes
LFY	Y Lorentz Force				yes
LFZ	Z Lorentz Force				yes
LFM	Lorentz Force Magnitude				yes
EFX	X EField				yes
EFY	Y EField				yes
EFZ	Z EField				yes
EFM	EField Magnitude				yes

A.32 Particle Blast Data Components

For PBLASTs the following data components are available.

	Component	THF (d3thdt)	LSDA (binout)	ASCII
Particle blast c	omponents			
AIE	Air internal energy		yes	yes
DPIE	Detonation product internal energy		yes	yes
OIE	Outside domain internal energy		yes	yes
ATE	Air translational energy		yes	yes

DPTE	Detonation product translational energy		yes	yes
OTE	Outside domain translational energy		yes	yes
Part compo	onents			
APR	Air pressure		yes	yes
DPPR	Detonation product pressure		yes	yes
RPR	Resultant pressure		yes	yes
AR	Surface Area		yes	yes
AFX	Air X Force		yes	yes
AFY	Air Y Force		yes	yes
AFZ	Air Z Force		yes	yes
DPFX	Detonation product X Force		yes	yes
DPFY	Detonation product Y Force		yes	yes
DPFZ	Detonation product Z Force		yes	yes
RFX	Resultant X Force		yes	yes
RFY	Resultant Y Force		yes	yes
RFZ	Resultant Z Force		yes	yes

A.33 Pressure Tube Data Components

For pressure tubes the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
AR	Cross section area			yes	yes
DE	Density			yes	yes
PR	Pressure			yes	yes
VEL	Velocity			yes	yes

A.34 Bearing Data Components

For bearings the following data components are available.

	Component	THF (d3thdt)	XTF (xtfile)	LSDA (binout)	ASCII
FX	X Force				yes
FY	Y Force				yes
FZ	Z Force				yes
MX	X Moment				yes
MY	Y Moment				yes
MZ	Z Moment				yes
DX	X Displacement				yes
DY	Y Displacement				yes
DZ	Z Displacement				yes
AX	X Angle				yes
AY	Y Angle				yes
AZ	Z Angle				yes

LFX	Local X Force	Luca .
LFA	Local A Force	yes
LFY	Local Y Force	yes
LFZ	Local Z Force	yes
LMX	Local X Moment	yes
LMY	Local Y Moment	yes
LMZ	Local Z Moment	yes
LDX	Local X Displacement	yes
LDY	Local Y Displacement	yes
LDZ	Local Z Displacement	yes
LAX	Local X Angle	yes
LAY	Local Y Angle	yes
LAZ	Local Z Angle	yes

APPENDIX B - T/HIS CURVE FILE FORMAT

A curve file is a file of x, y values which can be read into T/HIS for plotting. It can be written by T/HIS or by another program, or created using a text editor.

The format is as flexible as possible to allow many types of data to be handled.

Line 1 : Title

Line 2 : X axis label
Line 3 : Y axis label
Line 4 : Curve label
Line 5 : X, Y point 1
Line 6 : X, Y point 2

: :

Line n+4: X, Y point n

The X and Y values can be in any format as long as the two values are separated by either a space or comma. Up to 500000 points can be input.

Several curves can be put in one file sequentially, separated by the word CONTINUE. The title and three label lines must be present for each curve.

A comment line may be included anywhere in the file by starting the line with a '\$'.

Comment lines above the curve's title can contain styles and curve tags associated with the corresponding curve.

B.1 Curve STYLE Information

From version 9.1 onwards T/HIS will recognise a line starting **\$ STYLE** as a style request for the following curve and the curve will be displayed with the corresponding style

A \$ STYLE line will take the format

\$ STYLE: LINE STYLE, LINE COLOUR, LINE WIDTH, LINE SYMBOLS, SYMBOL FREQUENCY

The following **\$ STYLE** options are available:

Style options	Available styles	Default
LINE STYLE	solid	solid
	dash	
	none	
LINE COLOUR	white	dependent on curve#
	red	
	green	
	blue	
	cyan	
	magenta	
	yellow	
	orange	
	turquoise	
	indigo	
	lime	
LINE WIDTH	fine	normal
	normal	
	bold	
	heavy	

LINE SYMBOLS	triangle	dependent on curve#
	square diamond	
	hourglass	
	cross	
	circle	
	start	
	dot	
	null	
SYMBOL FREQUENCY	frequency number (integer)	

B.2 Curve TAGs

T/HIS will recognise a line starting with **\$ TAG** as a tag for the following curve and the tag can be used in T/HIS to reference the corresponding curve

a **\$ TAG** line will take the format

\$ TAG: tag name

B.3 Curve UNITs

From version 9.4 onwards a T/HIS curve file can also contain information on the Unit system and the X and Y axis units.

A unit system is defined by a line starting with \$ UNIT SYSTEM and will take the format

\$ UNIT SYSTEM: system name

The following unit systems names can be specified by using either the full name or just "Un."

U1: m,kg,s (SI) U2: mm,T,s U3: mm,kg,ms U4: mm,gm,ms U5: ft,slug,s U6: m,T,s

The $\, X \,$ and $\, Y \,$ axis units are defined by a line starting with either $\, X \,$ AXIS UNIT or $\, Y \,$ AXIS UNIT and take one of the 2 following formats

\$ X AXIS UNIT : unit name

\$ X AXIS UNIT : mass,length,time,angle,temperature,current

For the 1st format the following predefined unit names are available.

Time	Rotation	Momentum	Energy Den
Energy	Rot Vel	Density	Mass Flow
Work	Rot Accel	Stress	Frequency
Temperature	Length	Strain	Power
Displacement	Area	Force	Thermal Flux
Velocity	Volume	Moment	Force width
Accel	Mass	Pressure	Moment width

If the axis units are NOT one of these predefined units then the second input format can be used to define the unit in terms of it's basic properties. The values for **mass**, **length**, **time**, **angle**, **temperature** and **current** should be the powers that are used to describe the unit in terms of it's fundamental dimensions.

Some examples of common units defined using this method are shown below.

Unit	Mass	Length	Time	Angle	Temperature	Current
Time	0.0	0.0	1.0	0.0	0.0	0.0
Displacement	0.0	1.0	0.0	0.0	0.0	0.0
Velocity	0.0	1.0	-1.0	0.0	0.0	0.0
Acceleration	0.0	1.0	-2.0	0.0	0.0	0.0
Stress	-1.0	1.0	-2.0	0.0	0.0	0.0

B.4 Example

The following example shows a curve file containing 2 curves.

The first curve will be plotted with a bold, solid, green line with triangular symbols every other data point. The curve contains 5 data points and is given a reference tag CURVE_1

The second curve will be plotted with a dashed, white, normal line. No symbols will be displayed. The curve contains 2 data points and has no reference tag.

\$		Comment line
\$ STYLE : solid, green	n,bold,triangle,2	Style line
\$ TAG : CURVE 1		Tag line
\$		Comment line
CURVE FILE EXAMPLE		;Title
Time		;X axis label
Displacement		;Y axis label
Curve number 1		;Curve label
0	2.0	;1st data pair
1.0	4E-3	
4.0,	4.7	
5 4		
10.0	8.9	;End of 1st curve
CONTINUE	8.9	
CONTINUE \$	8.9	Comment line
CONTINUE	8.9	
CONTINUE \$		Comment line
CONTINUE \$ \$		Comment line Comment line
CONTINUE \$ \$ \$ \$ \$ STYLE : dash, white		Comment line Comment line Style line
CONTINUE \$ \$ \$ STYLE : dash, white CURVE FILE EXAMPLE		Comment line Comment line Style line
CONTINUE \$ \$ \$ STYLE : dash, white CURVE FILE EXAMPLE Time		Comment line Comment line Style line
CONTINUE \$ \$ \$ STYLE : dash, white CURVE FILE EXAMPLE Time Displacement		Comment line Comment line Style line
CONTINUE \$ \$ \$ STYLE : dash, white CURVE FILE EXAMPLE Time Displacement Curve number 2	,,,	Comment line Comment line Style line

The abscissa (x axis) values are assumed to be in the correct order.

The free format allowed for the data points.

The style line must contain 5 comma separated words in the order LINE STYLE, LINE COLOUR, LINE WIDTH, LINE SYMBOLS, SYMBOL FREQUENCY to be successfully understood by T/HIS. If any words are unspecified in the style line, as in curve 2, T/HIS will take the default option.

APPENDIX C - T/HIS BULK DATA FILE FORMAT

Format of a T/HIS Bulk Data File.

A bulk data file contains a number of curves that share the same X values.

The format of the file is as follows:

Line 1 : Title

Line 2 : Number of curves (maximum 12)

Line 3 : Format, see Note 1 below

Line 4 : Multipliers on values, see Note 2 below

Line 5 : Axis labels, see Note 3 below
Line 6 : Line labels, see Note 4 below
Line 7 : X, Y1, Y2, Y3 point 1
Line 8 : X, Y1, Y2, Y3 point 2
Line n+6 : X, Y1, Y2, Y3 point n

Up to 500000 points can be read in for each curve.

Note The format for the point data must be given as a standard Fortran format statement, for example (F10.3, 4F10.2). The external brackets around the format must be included. If the data can be read in as a free format then type **FREE** or leave this line blank. Note however, free data is read in more slowly than formatted data.

Note The multipliers are the amount by which the values read in are to be multiplied. For example you may wish to correct from ms to s or units of G (gravity) to mm/s². On this line give the multipliers in the order X-value, Y1-value, Y2-value, etc. Separate each multiplier by a space or comma. A zero value is assumed to be 1. If all curves are to be read in as defined leave this line blank.

Note The axis labels are character strings, separated by commas given in the following order.

X-axis label, Y1-axis label, Y2-axis label, etc.

Note The line labels are character strings separated by commas given in the following order.

Line label 1, Line label 2, Line label 3, etc.

A comment line may be included any where in the file by starting the line with a \$.

The following shows a bulk data file with three curves and seven points on each curve.

```
$ Comment line
Title of the curves
3
FREE
$ A multiplier of 10 on X values and 5 on Y2 values
10,,5,
x-axis,y1-axis,y2-axis,y3-axis
curve 1,curve 2,curve 3
$ Now for the data
0.0 0.0 1.0 2.0
1.0 1.0 3.0 4.0
2.0 2.0 4.0 5.0
2.4 4.4 5.5 7.4
3.3 7.8 5.8 9.2
4.4 10.0 12.0 13.0
```

APPENDIX D - FILTERING

This Appendix describes the filtering options within T/HIS.

Curves can be filtered to remove high frequency noise. The technique is typically applied to acceleration and force traces. Options available include standard filters (Channel Frequency Classes 60, 180, 600 and 1000 as per British Standard BS AU 228: Part 1: 1989, and the USA's National Highway Traffic Safety Administration (NHTSA) FIR filter). The standard filters (except the FIR filter) are all special cases of the Butterworth filter.

D.1 Curve Regulation

All filtering options require the curves to have a constant time increment between points. This will generally be the case if the curves are LS-DYNA time history results. If not, the REGULARISE option will convert the curve to constant time increment.


Typically the time increment should be at least 10 times the cut-off frequency; 10kHz (a 0.0001 second interval time base) is a good choice for automotive crash applications.

D.2 Use of the Butterworth Filter Option


The Butterworth filter is a low pass filter with two input variables; order and cut-off frequency.

The order of the filter controls the roll-off rate, as shown here in the figure (right)


This is a 300Hz filter. It can be seen that higher orders attenuate the results more quickly: they have a higher roll-off rate.

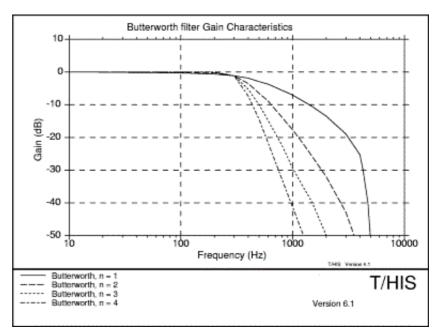


The cut-off frequency is the frequency at which the gain of the filter is -3dB (i.e. the magnitude of signals at this frequency is halved by the filter). The lower the frequency the less noise passes through; but any peaks in the signal tend to get reduced in magnitude and delayed in time.

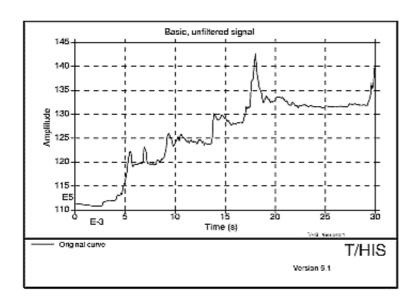


Unfiltered Signal

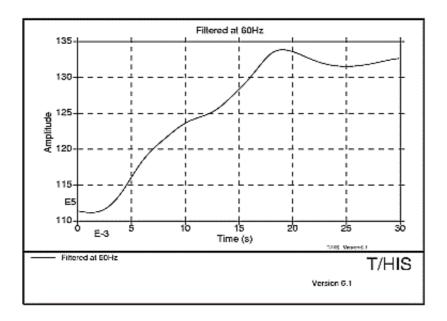


Filtered at 60Hz

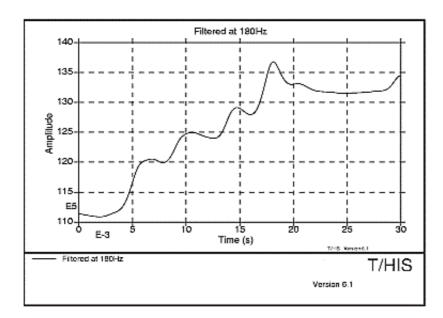

Filtered at 180Hz

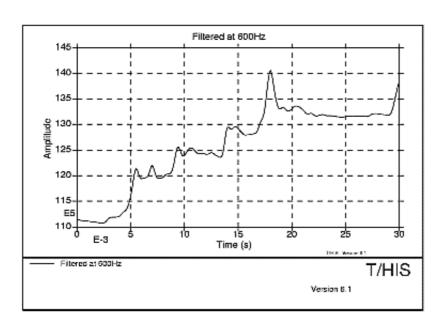

Filtered at 600Hz

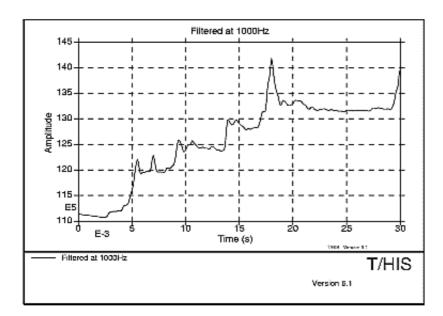


Filtered at 1000Hz

The above figures show examples of filtering frequency using the four standard SAE filters (60, 180, 600 and 1000 Hz cut-off frequencies: see below). These show clearly how the original signal is smoothed.

D.3 Butterworth Filter Implementation

Two refinements have been incorporated:

- Reflection of beginning and end of curves to minimise end-effects of filtering (see the figure below).
- The curve is first passed forwards through the filter, then the resulting signal is passed through backwards. This procedure minimises phase change errors. The poles and zeros of the filter are calculated such that the desired cut-off frequency is achieved after two passes.

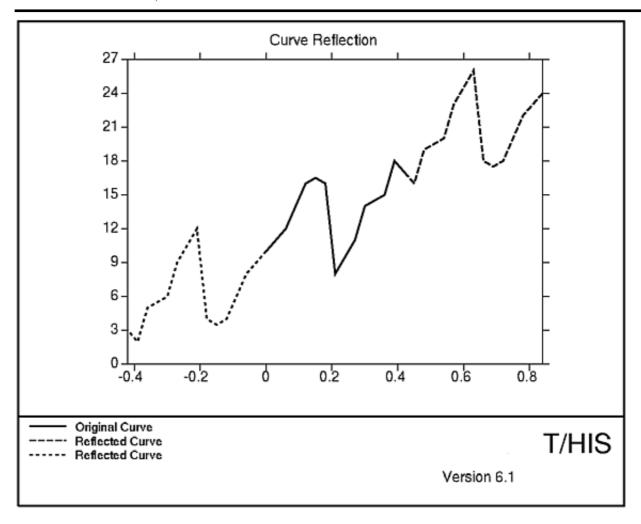

D.4 Standard SAE Filter Options

Channel Filter Classes 60, 180, 600 and 1000 are Butterworth filters with the following parameters:

Filter Class	Cut-off Frequency	Orde
60	100Hz	2
180	300Hz	2
600	1000Hz	2
1000	1650Hz	2


The gain characteristics are compared with the limits given in BS AU228 in the following four figures.


D.5 Standard FIR filter option


The FIR filter (Finite Impulse Response) is specified by NHTSA. It is used for filtering thoracic accelerations from side impact dummies; the filtered accelerations are then used in calculation of TTI (Thoracic Trauma Index). Its characteristics are:


- A passband frequency of 100Hz.
- A stopband frequency of 189Hz.
- A stopband gain of -50dB.
- A passband ripple of 0.0225dB.

It is based on a standard Fortran programme available from NHTSA.

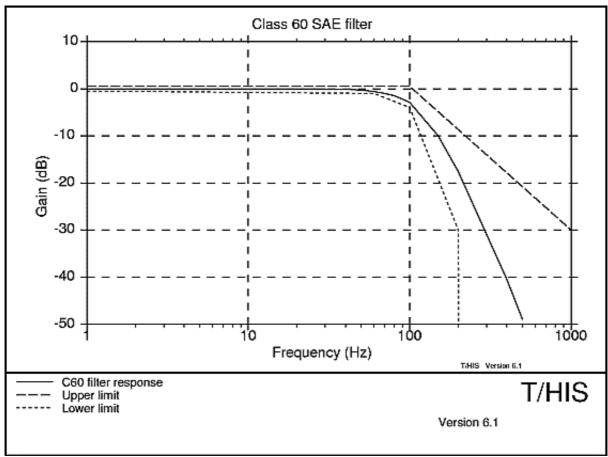

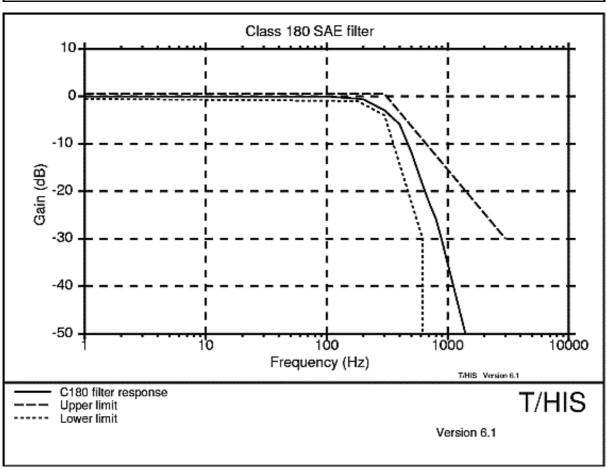

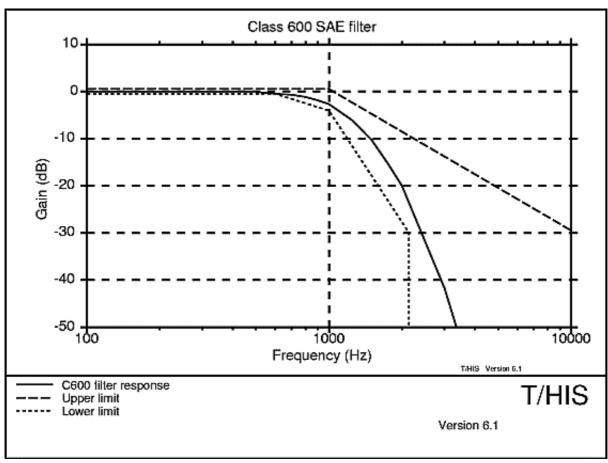

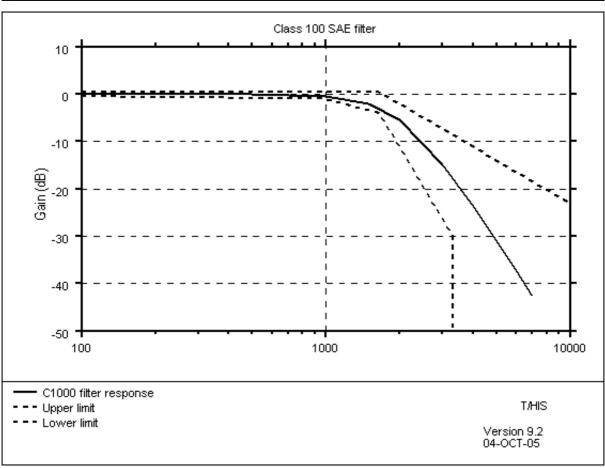

APPENDIX E - INJURY CRITERIA

T/HIS has the option to calculate two of the injury criteria that are used currently in occupant protection. These are the head impact criteria or HIC value and 3ms clip value. These criteria are defined as follows:

E.1 HIC Value

The HIC value is calculated from the resultant acceleration time history of the head centre of gravity filtered through a class 1000 filter. The HIC value is then calculated from;

HIC =
$$\left[\frac{1}{(t_2 - t_1)} \int_{t_1}^{t_2} a \, dt\right]^{2.5} (t_2 - t_1)$$

Where a is the acceleration expressed in g, and t_1 and t_2 are any two points in time. It is now usual for an upper limit on the range t_2 - t_1 of 36ms to be applied.

E.2 3ms Clip

The 3ms clip value is the maximum value of acceleration that is exceeded for a period of not less than 3 ms. This is not an easily comprehended definition: the following may be of more use:

At each time point T, take the interval (T to T+3ms);

- (1)
- (2) In this interval find the **lowest** acceleration value;
- (3) The "3ms Clip" value is the interval (T to T+3ms) which has the **largest** "lowest" value as calculated in (2) above.

So, perhaps, a better definition might be: "the 3ms interval with the highest lowest acceleration value".

E.3 Viscous Criteria

The VC value is calculated from a compression time history using the following formula (the values of the constants A and B assume the compression is in metres);

$$\begin{aligned} & \text{VC} = \text{A} \Big[\text{V}_{(t)} \text{C}_{(t)} \Big] \\ & \text{where} \quad \text{C}_{(t)} = \frac{\text{D}_{(t)}}{\text{B}} \\ & \text{V}_{(t)} = \frac{8 \Big[\text{D}_{(t+1)} \cdot \text{D}_{(t,1)} \Big] - \Big[\text{D}_{(t+2)} \cdot \text{D}_{(t-2)} \Big]}{12 dt} \quad \text{(ECER95 regulations)} \\ & \text{V}_{(t)} = \frac{d \text{D}}{dt} \quad \text{(IIHS regulations)} \\ & \text{D}_{(t)} = \text{Rib Compression} \\ & \text{A} = \text{Constant} \quad (1.3 \, \text{frontal}, 1.0 \, \text{side}) \\ & \text{B} = \text{Constant} \quad (0.229 \, \text{frontal}, 0.140 \, \text{side}) \end{aligned}$$

E.4 Acceleration Severity Index

The ASI value is calculated from 3 acceleration time histories using the following fomula;

$$ASI_{(t)} = \left[\left(\frac{ax}{xl} \right)^2 + \left(\frac{ay}{yl} \right)^2 + \left(\frac{az}{zl} \right)^2 \right]^{0.5}$$

Where ax,ay,az are the X,Y,Z accelerations of the vehicle:

- for the 1998 calculation (BS EN 1317-1:1998) they are averaged over a 50ms moving interval.

- for the 2010 calculation (BS EN 1317-1:2010) they are passed through a four-pole phaseless Butterworth filter with a 13Hz cut-off frequency.

xl,yl,zl are acceleration limits xl = 12g yl = 9g zl = 10g.

The acceleration input curves should be in units of g. If the input curves are in any other unit a conversion factor can be input to convert back to g.

When selecting input curves it is assumed that the X curve is numerically the first curve (the one with the lowest id) of the ones selected and the Z curve is the last. If they are in a different order then the acceleration limits can be modified to reflect the different order. For more information on ASI see BS EN 1317-1.

NOTE: For the BS EN 1317-1:2010 calculation T/His assumes the curves have been filtered through a Class 180 filter and padded with +/-0.5seconds of data as per the specification.


E.5 Theoretical Head Impact Velocity & Post Impact Head Deceleration

The theoretical head impact velocity concept has been developed for assessing occupant impact severity for vehicles involved in collisions with road vehicle restraint systems. The occupant inside the vehicle is considered to be a freely moving object that, as the vehicle changes its speed due to the contact with the restraint system, continues moving until it strikes the vehicle interior. The velocity magnitude at the time of impact with the vehicle interior is considered to be a measure of the vehicle to vehicle restraint system impact severity.

After impact the head is assumed to continue moving with the vehicle during the rest of the impact event. The post impact head deceleration (PHD) is calculated as the peak value using a 10ms moving average of the resultant vehicle acceleration after the THIV impact.

The THIV calculation requires the following inputs

- Horizontal Vehicle Acceleration Time History (Ax)
- Lateral Vehicle Acceleration Time History (Ay)
- Yaw Rate Time History
- Horizontal Distance from the occupants head to vehicle (Dx)
- Lateral Distance from the occupants head to vehicle (Dx)

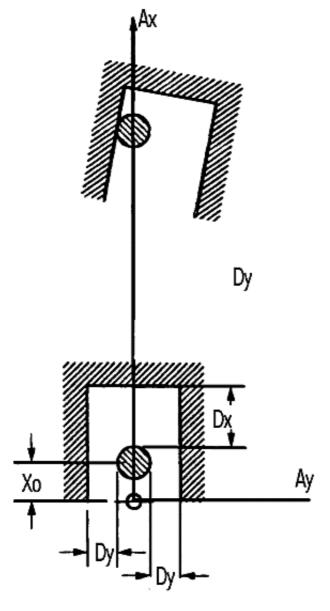

For more information on THIV and PHD see BS EN 1317-1.

E.6 Biomechanical neck injury predictor (NIJ)

The biomechanical neck injury predictor is a measure of the injury due to the load transferred through the occipital condyles. Its calculation combines the neck axial force and the flexion/extension moment about the occipital condoyles.

It is used in association with the USSID dummy for standard American frontal impact tests.

The shear force (Fx), axial force (Fz) and bending moment (My) are measured by the dummy upper neck load cell for the duration of the crash, using force and moment definitions consistent with SAE J221/1. T/HIS will caculate the bending moment using the equation:

$$My = My' - e \cdot Fx$$

Where e is the e distance specified in the input window, Fx is the shear force.

Shear force, axial force and bending moment must be filtered using an SAE Channel Frequency Class 600 filter (C600) for the purposes of calculation.

During the collision, the Axial Force (Fz) can be in either tension or compression whilst the occipital condyle bending moment (Mocy) can be in either flexion or extension. This results in 4 possible loading conditions corresponding to the 4 curves output by T/HIS; tension-extension (Nte), tension-flexion (Ntf), compression-extension (Nce), and compression-flexion (Ncf). At each point in time only one of these 4 conditions can be met, hence the NIJ value is calculated for that condition and the value for the other 3 conditions is considered a value of zero..

The expression for calculating each NIJ loading condition is given by:

NIJ = (Fz/Fzc) + (Mocy/Myc)

where Fz and Mocy are as defined above, Fzc and Myc refer to the axial force and Bending moment critical values, given below:

The values of Fzc and Myc vary depending on the occupant, the occupants position and the sign of Fz and Mocy

For the dummy to pass the test, the following conditions must be met:

- (i) None of the 4 NIJ values may exceed 1.0 at any time during the event
- (ii) Peak Tension Force (Fz), measured at the upper neck load cell, may not exceed the specific dummy's limit (e.g. 2070N for the Hybrid III small female) at any time
- (iii) Peak Compression Force (Fz), measured at the upper neck load cell, may not exceed the specific dummy's limit (e.g. 2520N for the Hybrid III small female) at any time

For more information on the use and calculation of NIJ, refer to the FMVSS 208 document

E.7 The Thoracic Trauma Index (TTI)

The Thoracic Trauma Index is used as a predictor of thoracic injury severity in the USSID dummy in standard American Side Impact tests.

The Index considers both rib and Thorax acceleration in an impast.

The expression for calculating TTI is given by:

TTI = (G(R) + G(LS))/2

Where G(R) is the greater of the peak accelerations of either the upper or lower rib, expressed in g, and G(LS) is the peak acceleration in the lower spine (T12), expressed in g.

For the dummy to pass the test, the following conditions must be met:

- (i) The TTI value must not exceed;
- (a) 85g for a passenger car with 4 side doors, and for any multipurpose vehicle, truck or bus
- (b) 90g for a passenger car with 2 side doors
- (ii) The peak lateral acceleration of the pelvis shall not exceed 130g

- (iii) Any side door, struck by the moving deformable barrier, shall not seperate totally from the car.
- (iv) Any door not struck by the moving deformable barrier must meet the following requirements;(a) The door chall not disengage from the latched position(b) The latch shall not seperate from the striker

- (c) The hinge components shall not seperate from each other or from their attachment to the vehicle (d) Neither the latch nor the hinge systems of the door shall pull out of their anchorage

For more information on the use and calculation of TTI, refer to the FMVSS 214 document

APPENDIX F - Curve Correlation

COR1 and COR2

The Correlation functions COR1 and COR2 provide a measure of the degree to which two curves match. When comparing curves by eye, the quality of correlation may be judged on the basis of how well matched are the patterns of peaks, the overall shapes of the curves, etc, and can allow for differences of timing as well as magnitude. Thus a simple function based on the difference of Y-values (such as T/HIS ERR function) does not measure correlation in the same way as the human eye. The T/HIS correlation function attempts to include and quantify the more subtle ways in which the correlation of two curves may be judged.

The correlation function may be applied to any two curves whose x-values increase monotonically (e.g. responses versus time). The results are independent of the units used, e.g. milliseconds or seconds are both acceptable. The sign of the y-values is not important.

Only the overlap time period is considered (i.e. the range of x-values for which both curves have a y-value). The time period (range of X-values) and maximum absolute Y-value are used to non-dimensionalise the curves such that x-values run from 0 to 1, and the maximum absolute y-value is 1.

Five measures of correlation are calculated. Each is given equal weighting. The final correlation score is given as a percentage - two identical curves would score 100%.

The first two measures require identification of peaks in the curves. An unlimited number of peaks in each curve will be considered. A peak is defined as a local maximum (or in the case of negative y-values a minimum), satisfying the following criteria:

- Absolute y-value at least 0.5
- Separated from any larger peak by a trough (local minimum) at least 0.2 deep.

Peaks of positive or negative signs are considered. Peaks are matched only against peaks of the same sign in the other curve.


Measure 1 - Peak values

For each identified peak in Curve A, find the maximum value in Curve B within the same time range for which the value in Curve A is within a tolerance of the peak value. Points are lost according to the error in y-values compared to a tolerance limit. Repeat for peaks in curve B against values in Curve A.

This measure allows for the situation where curves are similar but the peaks are more strongly delineated in one of the curves, such that the program does not recognise the other curve as having a peak in that location.

Measure 2 - Peak matching

For each identified peak in Curve A, find the closest identified peak in Curve B. Points are lost according to the largest error (timing or y-value) compared to tolerance limits; points are also lost if there is no corresponding peak in Curve B. Repeat for Curve A peaks matched against those of Curve B.

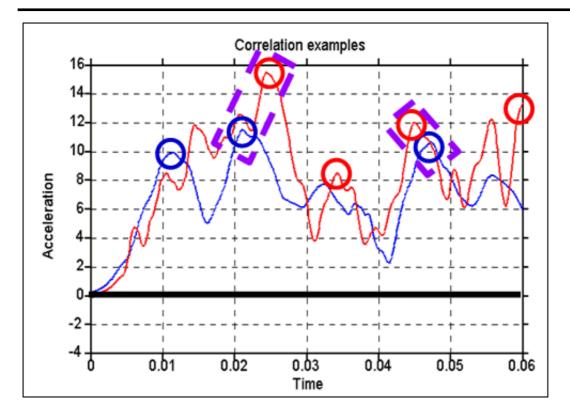


This measure picks up matching of primary and secondary peaks in the curves, which may correspond to physical events.

Measure 3 - Area matching

The integral of each curve is calculated by summing the area of the curve above y=0 and the absolute area of the curve below y=0. Points are lost according to the difference compared to a tolerance limit.

Measure 4 - Curve shape (low frequency excursion)

The curves are filtered. A band is drawn around filtered curve A (using positive and negative offsets in x and y). The area of excursions of filtered Curve B outside the band is calculated. Points are lost according to the excursion area compared to a tolerance limit. The process is repeated for filtered Curve A excursions from a band drawn around filtered curve B

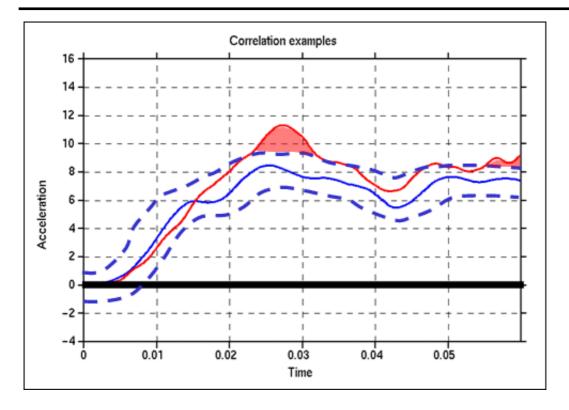

Measure 5 - Curve shape (full curve)

The same as Measure 4 except that the curves are not filtered and different tolerance limits and band sizes may be used.

Output

T/HIS prints the overall correlation percentage and the marks from each measure to the screen or to a text file. A new curve is created from each input curve showing the identified peaks (used in measures 1 and 2). As the same curve could be used as input to multiple correlations the correlation percentage is stored internally in T/HIS with the 2 output curves NOT the input curves.

The correlation percentage can be accessed from within FAST-TCF scripts by requesting the "correlate" property for either of the 2 outtut curves.

e.g. operation correlate strict curve_1 curve_2 tag curve_3 curve_4

Calculate correlation between "curve_1" and "curve_2". Tag the curves containing the peaks as "curve_3" and "curve_4"

tab output.txt curve_3 correlate

Output the curve correlation value from "curve_3" to the file "output.txt"

taba output.txt curve_4 correlate

Append the curve correlation value from "curve_4" to the file "output.txt"


Selection of Parameters


The Correlation algorithm has many tolerance limits and other inputs. Two sets of these parameters have been pre-selected, to offer strict or less strict judgement of correlation (buttons COR1 and COR2 in the Automotive menu). The parameters selected are:

Criterion		COR1 Value	COR2 Value
Peak matching	Fraction difference in timing that scores zero points for this peak	0.2	0.4
Peak matching and peak values	Fraction difference in value that scores zero points for this peak	0.25	0.5

Area matching	Fraction difference in integral that scores zero points	0.3	0.5
Curve shape (low frequency trend)	Size of tolerance band in X and Y, as fractions of the curve extent in X and Y	0.025	0.05
Curve shape (low frequency trend)	Excursion area fraction scoring zero points	0.1	0.2
Curve shape (full curve)	Size of tolerance band in X and Y, as fractions of the curve extent in X and Y	0.025	0.05
Curve shape (full curve)	Excursion area fraction scoring zero points	0.2	0.4


It is expected that, if COR1 rates Curves A and B as better correlated than C and D, then COR2 would also rate the pairs of curves in the same order. The percentage correlation would be greater in each case from COR2 than from COR1. COR1 will provide a greater difference (discrimination) between well-correlated and very well-correlated pairs of curves; while COR2 will provide greater discrimination between averagely-correlated and poorly-correlated pairs of curves. The purpose of offering both versions of the correlation function is to allow the user to select a calibration of the function appropriate to the typical input curves used.

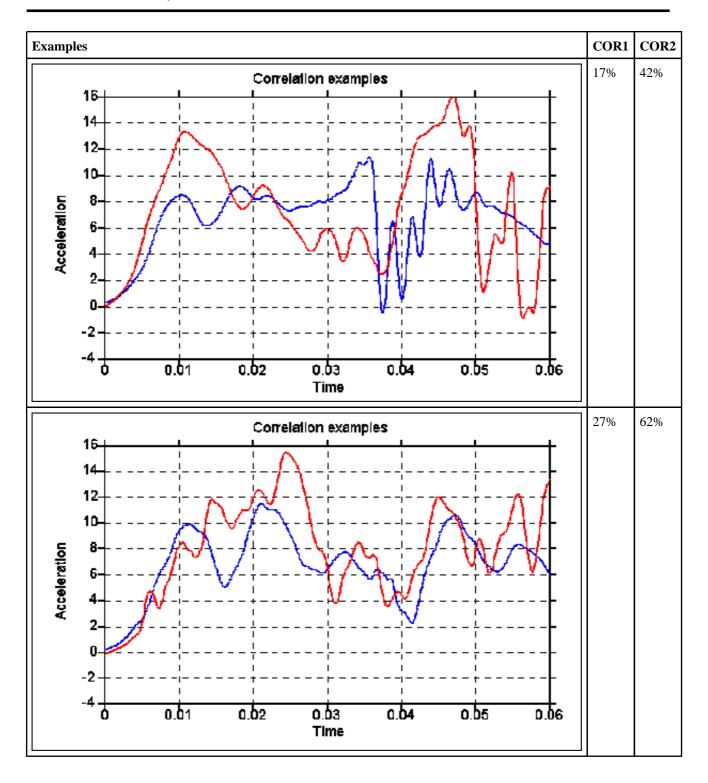

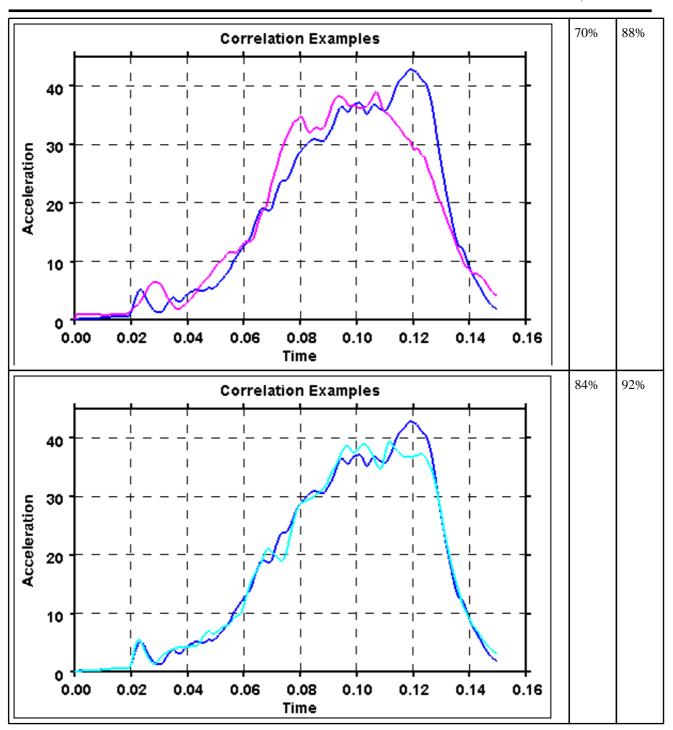

COR₃

The Correlation function COR3 provides another measure of the degree to which two curves match based on the distance between the two curves.

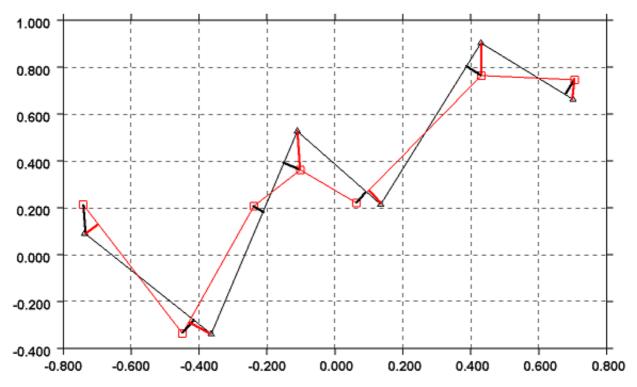

This function first normalises the curves using two factors, specified either by the user or defaults calculated by the program (the maximum absolute X and Y values of both graphs).

For each point on the first normalised curve, the shortest distance to the second normalised curve is calculated (the thick black lines on the image above). The root mean square value of all these distances is subtracted from 1 and then multiplied by 100 to get an index between 0 and 100.

The process is repeated along the second curve (the thick red lines show the distances) and the two indices are averaged to get a final index. The higher the index the closer the correlation between the two curves.

Note that the choice of normalising factors is important. Incorrect factors may lead to a correlation index outside the range of 0 to 100.

WIF

The Correlation function WIF provides another measure of the degree to which two curves match. It uses the Weighted Integrated Factor method:

$$crit = 1 - \sqrt{\frac{\sum \max(f[n]^2, g[n]^2) \cdot \left(1 - \frac{\max(0, f[n] \cdot g[n])}{\max(f[n]^2, g[n]^2)}\right)^2}{\sum \max(f[n]^2, g[n]^2)}}$$

APPENDIX G - The ERROR Calculation

The ERROR function outputs a number of values to indicate the degree of correlation between 2 curves. The function requires two input curves

- A reference curve to compare against (the first curve selected)
- The curve to compare against the reference

Once 2 curves have been selected the a check is carries out to see if the two curves contain the same number of points and if the range of x-axis values the same for the two curves. If any inconsistencies are found then a warning message is generated.

The following values are then calculated

Maximum difference and time of variation

Maximum difference as a % age of the reference value at the same time

Maximum difference as a %age of the peak reference value

Average difference

Average difference as a %age of the peak reference value

T/HIS Regression coefficient.

$$R^{2} = \left[1 - \frac{\sum (y_{c} - y_{a})^{2}}{\sum y_{a}^{2} - \frac{\sum y_{a}^{2}}{n}}\right]$$

 $y_c = Data Curve$

 $y_a = Average of Data and Reference Curve = \frac{1}{2}(y_c + y_r)$

n = Number of Data Points

This is a value between 0 and 1 where 1 means 100% correlation

APPENDIX H - The "oa_pref" preference file

This file contains code-specific preferences that can be used to modify the behaviour of T/HIS. It is optional and, where entries (or the whole file) are omitted T/HIS will revert to its default settings.

"oa pref" naming convention and locations

The file is called "oa_pref. It is looked for in the following places in the order given:

- The optional administration directory defined by the environmental variable (\$OA_ADMIN or \$OA_ADMIN_xx where xx is the release number).
- The site-wide installation directory defined by the environment variable (\$OA INSTALL)
- The user's home directory: \$HOME (Unix/Linux) or \$USERPROFILE\$ (Windows)
- The current working directory

See Installation organisation for an explanation of the directory structure.

All four files are read (if they exist) and the last preference read will be the one used, so the file can be customised for a particular job or user at will.

Files do not have to exist in any of these locations, and if none exists the programme defaults will be used.

On Unix and Linux:

\$HOME on Unix and Linux is usually the home directory specified for each user in the system password file. The shell command "printenv" (or on some systems "setenv") will show the value of this variable if set. If not set then it is defined as the "~" directory for the user. The command "cd; pwd" will show this.

On Windows:

%USERPROFILE% on Windows is usually C:\Documents and Settings\<user id>\ Issuing the "set" command from an MS-DOS prompt will show the value of this and other variables.

Generally speaking you should put

- Organisation-wide options in the version in \$OA_ADMIN_xx and/or \$OA_INSTALL,
- User-specific options in \$HOME / %USERPROFILE%
- Project-specific options in the current working directory.

The file contains preferences for the SHELL (lines commencing shell*), THIS (lines commencing this*), D3PLOT (lines commencing d3plot*), PRIMER (lines commencing primer*)and REPORTER (lines commencing reporter*). All lines take the format preference name> cpreference value>.

The general copy of the preference file should be present in the <u>\$OA_ADMIN_xx</u> and/or <u>\$OA_INSTALL</u> directory. This should contain the preferences most suitable for all software users on the system.

An individual's specific preferences file can be stored in the individual's home area. This can be used to personally customise the software to the individual's needs.

Whenever one of the programs whose preferences can be stored in the oa_pref file is fired up, the program will take preferences first from the general preference file in the <u>\$OA_ADMIN_xx</u> directory (if it exists) then the <u>\$OA_INSTALL</u> directory, then from the file in the user's home area, then from the current working directory.

Preferences defined in the general oa_pref file can be modified in the user's personal file but they can't be removed by it.

From version 9.4 onwards preferences can be locked. If a preference is locked it cannot be changed in an oa_pref file in a more junior directory. To lock a preference use the syntax 'this#' rather than 'this*'.

The interactive Preferences Editor

You are free to edit oa_pref files by hand, but there is an interactive "Preferences Editor" that may be called from within T/HIS that makes the job much easier.

It is started by **Options**, **Edit Preferences** or through the Preferences Button in the Tool menu

The preferences editor reads an XML file that contains all possible preferences and their valid options, and allows you to change them at will. In this example the user is changing the background colour in D3PLOT.

Note that changes made in the Preferences editor will not affect the current session of D3PLOT, they will only take effect the next time it is run.

If you have write permission on the oa_pref file in the \$OASYS directory you will be asked if you want to update that file, otherwise you will only be given the option of updating your own file in your \$HOME / \$USERPROFILE directory.

In this example the user is changing the background colour.


The option is "active" (ie present in the oa_pref file) and currently is set to WHITE.

Usage is:

Red

- Select an option in the Tree on the left hand side
- Make it active / inactive
- If active select a value from the popup, or type in a value if necessary

The colour of the highlighting in the left hand side tree is significant:

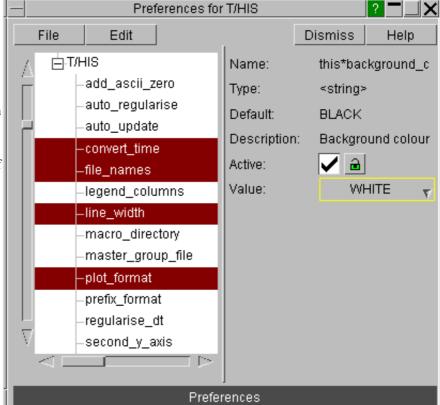

Green Means that the option has been read from your \$HOME/\$USERPROFILE file.

Means that the option has been read from the \$OA_INSTALL file.

Magenta Means that the option had been read from the \$OA_ADMIN file.

In either event, regardless of the data source, the updated option will be written to the file chosen when you started the preferences editor.

Because of the order of file reading (<u>see above</u>), and option read from the master \$OASYS file, amended, and written to your local \$HOME file will take precedence when you next run T/HIS.

Locking Preferences

From version 9.4 onwards preferences can be locked. Beside each option in the preference editor is a padlock symbol. If the symbol is green then the option is unlocked, if it is red then it is locked. If a preference option has been locked in a file that the user can not modify then an error message will be generated if the user tries to edit that option.



If a user manually edits the "oa_pref" file to try and set an option that has been locked in another preference file then the option will be ignored in the users preference file.

Format of the oa_pref file

Entries are formatted in the following way:

For example: this*laser paper size: A4

The rules for formatting are:

- The coption>: string must start at column 1;
- This string must be in lower case, and must not have any spaces in it.
- The <setting> must be separated from the string by at least one space. Lines starting with a "#" are treated as comments and are ignored.

(Users accustomed to setting the attributes of their window manager with the .Xdefaults file will recognise this format and syntax.)

"oa_pref" arguments valid for T/HIS.

Preference	Туре	Description	Valid arguments	Default
legend_layout		Layout of legend	COL_LIST, AUTO, OFF, FLOAT	AUTO
add_ascii_zero	<logical></logical>	Automatically add point at time zero if required	TRUE, FALSE	FALSE
auto_regularise	<logical></logical>	Always regularise curves before filtering	TRUE, FALSE	FALSE
auto_update	<logical></logical>	Automatically replot graph after changing axis/title options	TRUE, FALSE	TRUE
checkpoint_dir	<string></string>	Directory for checkpoint files, or "none" to suppress them altogether		<none></none>
curve_property_number_format	<string></string>	Number format option for curves	AUTO, SCIENTIFIC, GENERAL	SCIENTIFIC
curve_property_dec_places	<integer></integer>	Number of decimal places to display for curves	0 - 9	3
error_handler	<string></string>	how to handle errors and exceptions	no_action, mini_dump, trap_continue, trace_exit	mini_dump
convert_time	<logical></logical>	Automatically convert from ms->s when filtering	TRUE, FALSE	FALSE
file_names	<string></string>	Controls default file filters. LSTC = d3thdt*, xtfile*, OASYS/ARUP = *.thf, *.xtf	OASYS, ARUP, LSTC	OASYS
legend_columns	<string></string>	Number of columns to display in legend	1, 2, 3	2

line_width		Default line width for curves (pixels)	1.0, 2.0, 4.0, 8.0	2.0
datum_file		File containing DATUM line definitons		<none></none>
macro_directory	<string></string>	Specify a directory for I/HIS to look in for MACRO definitions		\$OA_INSTALL/this_library/macros
master_group_file		Filename for default group information		<none></none>
read_group_files		when a group file is found in a model directory and T/HIS has already read a group file.		IGNORE
pemag_calculation_v12	<logical></logical>	Whether the PEMAG calculation uses the v12 logic.	TRUE, FALSE	FALSE
plot_format	<string></string>	Default format of plot	COLUMN, DEFAULT, AUTO, OFF, FULL, FLOATING	COLUMN
prefix_format	<string></string>	Select the prefix formatting for Legend curve labels.	MODEL, DIRECTORY, ROOTNAME, USER	MODEL
regularise_dt	<real></real>	Time interval for automatic curve regularisation		0.0001
second_y_axis	<logical></logical>	Display 2nd y axis	TRUE, FALSE	FALSE
show_hic_value	<string></string>	Display HIC value	ON, OFF	OFF
show_3ms_value		Display 3ms Clip value	ON, OFF	OFF
show_thiv_value		Display THIV value	ON, OFF	OFF
show_phd_value	<string></string>	Display PHD value	ON, OFF	OFF

		,		
injury_text_colour	<string></string>	Colour used to	FOREGROUND,	FOREGROUND
	_	display injury	CURVE, WHITE,	
		criteria values	BLACK, RED, GREEN,	
			BLUE, CYAN,	
			MAGENTA, YELLOW,	
			ORANGE,	
			TURQUOISE, INDIGO,	
			LIME, SKY, PINK,	
			PALE_YELLOW,	
			GOLD, OLIVE,	
			DARK_MAGENTA,	
			MEDIUM GREEN,	
			MEDIUM_BLUE,	
			HOT_PINK,	
			LIGHT_PINK,	
			SEA_GREEN,	
			MAROON,	
			DARK_GREEN,	
			PURPLE, NAVY,	
			DARK_GREY,	
			MEDIUM_GREY,	
			LIGHT_GREY,	
			USER_1, USER_2,	
			USER_3, USER_4,	
			USER_5, USER_6,	
			COL_1, COL_2, COL_3,	
			COL_4, COL_5, COL_6,	
			COL_7, COL_8, COL_9,	
			COL_10, COL_11,	
			COL_12, COL_13,	
			COL14, COL_15,	
			COL_16, COL_17,	
			COL_18, COL_19,	
			COL_20, COL_21,	
			COL_22, COL_23,	
			COL_24, COL_25,	
			COL_26, COL_27,	
			COL_28, COL_29,	
			COL_30, COL_31,	
			COL_32, COL_33,	
			COL_34, COL_35,	
			COL 36	

injury line colour	/ctring>	Colour used to	EOREGROUND	FOREGROUND
injury_line_colour	<string></string>	display injury criteria lines	CURVE, WHITE, BLACK, RED, GREEN, BLUE, CYAN, MAGENTA, YELLOW, ORANGE, TURQUOISE, INDIGO, LIME, SKY, PINK, PALE_YELLOW, GOLD, OLIVE, DARK_MAGENTA, MEDIUM_GREEN, MEDIUM_BLUE, HOT_PINK, LIGHT_PINK, SEA_GREEN, MAROON, DARK_GREEN, PURPLE, NAVY, DARK_GREY, MEDIUM_GREY, LIGHT_GREY, USER_1, USER_2, USER_3, USER_4, USER_5, USER_6, COL_1, COL_2, COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10, COL_11,	FOREGROUND
			COL_12, COL_13, COL_14, COL_15, COL_16, COL_17, COL_18, COL_19, COL_20, COL_21, COL_22, COL_23, COL_24, COL_25, COL_26, COL_27, COL_28, COL_29, COL_30, COL_31, COL_32, COL_33, COL_34, COL_35, COL_34, COL_35, COL_36	
auto_blank	<string></string>	Turn ON/OFF AutoBlank	ON, OFF	ON
auto_blank_mode	<string></string>	Set the default AutoBlank mode	MODEL, COMPONENT_ID, ENTITY_TYPE, ENTITY_ID, COMPONENT_TYPE, SURFACE, CURVE	MODEL
start_in	<string></string>	Directory to start T/HIS in		<none></none>
show_license_warning	<logical></logical>		TRUE, FALSE	TRUE
save_window_positions		Save position of undocked windows between sessions	TRUE, FALSE	TRUE
vc_method		Default method for calculating Viscous Criteria	·	ECER95
asi_method	<string></string>	Default method for calculating Acceleration Severity Index	2010, 1998	2010

curve_palette	<string></string>	many colours	DEFAULT, EXTENDED, NO_GREY, FULL	OFF
ftcf_error_count	<integer></integer>	Maximum number of errors before a FAST-TCF script terminates		10
null_value	<real></real>	Value to assign to curves when data doesn't exist		1.0E+18
csv_separator	<string></string>		COMMA, TAB, SPACE	COMMA

The following options control the automatic creation of curve groups.

Preference	Туре	Description	Valid arguments	Default
group_by_model		Automatically create a curve group for each model	TRUE, FALSE	TRUE
group_by_type	<logical></logical>	Automatically create a curve group for each entity type data is read for	TRUE, FALSE	FALSE
group_by_component		Automatically create a curve group for each component type data is read for	TRUE, FALSE	FALSE
component_group_name		Controls how curve groups created for components are named)	COMPONENT, COMPONENT_AND_TYPE	COMPONENT
group_by_file_index		Automatically create a curve group based on the index of a curve read from a curve file	TRUE, FALSE	FALSE

The following options control the columns that are dsiplayed by default in the curve table

Preference	Туре	Description	Valid arguments	Default
ctable_show_curve_id	<logical></logical>	Display Curve IDs	TRUE, FALSE	TRUE
ctable_show_label	<logical></logical>	Display Curve Labels	TRUE, FALSE	TRUE
ctable_show_model	<logical></logical>	Display Files / Models	TRUE, FALSE	TRUE
ctable_show_type	<logical></logical>	Display Entity Types	TRUE, FALSE	TRUE
ctable_show_entity_id	<logical></logical>	Display Entity Ids	TRUE, FALSE	TRUE
ctable_show_component	<logical></logical>	Display Components	TRUE, FALSE	TRUE
ctable_show_style	<logical></logical>	Display Curve Styles	TRUE, FALSE	TRUE
ctable_show_directory	<logical></logical>	Display Directories	TRUE, FALSE	TRUE

The following options control the default location and name of where T/HIS looks for model database files.

Preference	Туре		Valid arguments	Default
				
database_dir	<string></string>	Directory to look in for model database (XML) files		<none></none>
database_file	<string></string>	Default model database (XML) file		<none></none>
database_expand	<integer></integer>	Number of levels to automatically expand in model database tree	-1 -	0
		(-1 ALL)	2147483646	

The following strings and values control display options

Preference	Туре	Description	Valid arguments	Default
axis_width		Default line width for axis (pixels)	1.0, 2.0, 4.0, 8.0	2.0

	1 .	1		
axis_colour			FOREGROUND, BACKGROUND, WHITE, BLACK, RED, GREEN, BLUE, CYAN, MAGENTA, YELLOW, ORANGE, TURQUOISE, INDIGO, LIME, SKY, PINK, PALE_YELLOW, GOLD, OLIVE, DARK_MAGENTA, MEDIUM_GREEN, MEDIUM_BLUE, HOT_PINK, LIGHT_PINK, SEA_GREEN, MAROON, DARK_GREEN, PURPLE, NAVY, DARK_GREY, MEDIUM_GREY, LIGHT_GREY, USER_1, USER_2, USER_3, USER_4, USER_5, USER_6, COL_1, COL_2, COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10, COL_11, COL_12, COL_13, COL14, COL_15, COL_16, COL_17, COL_18, COL_15, COL_21, COL_22, COL_23, COL_24, COL_25, COL_26, COL_27, COL_28, COL_25, COL_26, COL_27, COL_28, COL_29, COL_30, COL_31, COL_32, COL_33, COL_34, COL_35, COL_36	FOREGROUND
axis_top		Turn ON/OFF drawing of graph top axis	ON, OFF	ON
axis_right	<string></string>		ON, OFF	ON
border_on	<logical></logical>		TRUE, FALSE	TRUE
border_width		width for border (pixels)	1.0, 2.0, 4.0, 8.0	1.0
border_colour			FOREGROUND, BACKGROUND, WHITE, BLACK, RED, GREEN, BLUE, CYAN, MAGENTA, YELLOW, ORANGE, TURQUOISE, INDIGO, LIME, SKY, PINK, PALE_YELLOW, GOLD, OLIVE, DARK_MAGENTA, MEDIUM_GREEN, MEDIUM_BLUE, HOT_PINK, LIGHT_PINK, SEA_GREEN, MAROON, DARK_GREEN, PURPLE, NAVY, DARK_GREY, MEDIUM_GREY, LIGHT_GREY, USER_1, USER_2, USER_3, USER_4, USER_5, USER_6, COL_1, COL_2, COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10, COL_11, COL_12, COL_13, COL14, COL_15, COL_16, COL_17, COL_18, COL_15, COL_21, COL_22, COL_23, COL_24, COL_25, COL_26, COL_27, COL_28, COL_29, COL_25, COL_26, COL_27, COL_28, COL_29, COL_30, COL_31, COL_32, COL_33, COL_34, COL_35, COL_36	FOREGROUND
grid_on	<logical></logical>	Display grid	TRUE, FALSE	FALSE
grid_width		width for grid (pixels)	1.0, 2.0, 4.0, 8.0	2.0
grid_colour			FOREGROUND, BACKGROUND, WHITE, BLACK, RED, GREEN, BLUE, CYAN, MAGENTA, YELLOW, ORANGE, TURQUOISE, INDIGO, LIME, SKY, PINK, PALE_YELLOW, GOLD, OLIVE, DARK_MAGENTA, MEDIUM_GREEN, MEDIUM_BLUE, HOT_PINK, LIGHT_PINK, SEA_GREEN, MAROON, DARK_GREEN, PURPLE, NAVY, DARK_GREY, MEDIUM_GREY, LIGHT_GREY, USER_1, USER_2, USER_3, USER_4, USER_5, USER_6, COL_1, COL_2, COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10, COL_11, COL_12, COL_13, COL14, COL_15, COL_16, COL_17, COL_18, COL_15, COL_21, COL_22, COL_23, COL_24, COL_25, COL_26, COL_27, COL_28, COL_25, COL_26, COL_27, COL_28, COL_29, COL_30, COL_31, COL_32, COL_33, COL_34, COL_35, COL_36	FOREGROUND
symbols_on		Display symbols		FALSE
symbol_freq	<integer></integer>	Frequency	1 - 2147483646	1
lines_on	<pre><!--ogical--></pre>	Display lines	TRUE, FALSE	TRUE

fix_styles	<logical></logical>	Fix curve styles to cycle through the default colours/styles regardless of the	TRUE, FALSE	FALSE
legend_bg_colour	<string></string>	Legends background colour	FOREGROUND, CURVE, WHITE, BLACK, RED, GREEN, BLUE, CYAN, MAGENTA, YELLOW, ORANGE, TURQUOISE, INDIGO, LIME, SKY, PINK, PALE_YELLOW, GOLD, OLIVE, DARK_MAGENTA, MEDIUM_GREEN, MEDIUM_BLUE, HOT_PINK, LIGHT_PINK, SEA_GREEN, MAROON, DARK_GREEN, PURPLE, NAVY, DARK_GREY, MEDIUM_GREY, LIGHT_GREY, USER_1, USER_2, USER_3, USER_4, USER_5, USER_6, COL_1, COL_2, COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10, COL_11, COL_12, COL_13, COL14, COL_15, COL_16, COL_17, COL_18, COL_15, COL_21, COL_22, COL_23, COL_24, COL_20, COL_21, COL_22, COL_23, COL_24, COL_25, COL_26, COL_27, COL_28, COL_29, COL_30, COL_31, COL_32, COL_33, COL_34, COL_35, COL_36	BLACK
legend_bg_trans	<integer></integer>	Legend background transparency	0 - 100	0
show_prefix	<string></string>	Allows you to toggle the Legend curve label prefix On/Off	AUTO, ON, OFF	AUTO

The following strings and values control formatting of values for graphs

Preference	Туре	Description	Valid arguments	Default
x_axis_type	<string></string>	Linear or Logarithmic X Axis type	LOGARITHMIC, LINEAR	LINEAR
x_grid_spacing_off	<real></real>	X-Axis Grid Spacing value		0.0
x_grid_spacing_int	<real></real>	X-Axis Grid Interval value		0.0
x_grid_spacing_auto	<string></string>	X-Axis Grid Spacing	AUTOMATIC, LOCKED	AUTOMATIC
y_axis_type	<string></string>	Linear or Logarithmic X Axis type	LOGARITHMIC, LINEAR	LINEAR
y_grid_spacing_off	<real></real>	Y-Axis Grid Spacing value		0.0
y_grid_spacing_int	<real></real>	Y-Axis Grid Interval value		0.0
y_grid_spacing_auto	<string></string>	Y-Axis Grid Spacing	AUTOMATIC, LOCKED	AUTOMATIC
y2_axis_type	<string></string>	Linear or Logarithmic X Axis type	LOGARITHMIC, LINEAR	LINEAR
y2_align_zero	<logical></logical>	Y2-Axis align with Y=0	TRUE, FALSE	FALSE
add_exponent_to_label	<logical></logical>	Add axis multiplier to label	TRUE, FALSE	TRUE
x_axis_decimal_places	<string></string>	Number of decimal places displayed for X axis values	0, 1, 2, 3, 4, 5, 6, 7, 8, 9, Default(3)	Default(3)
x_axis_format	<string></string>		Automatic, General, Scientific, Default(Automatic)	Default(Automatic)

y_axis_decimal_places	<string></string>	Number of decimal places displayed for Y axis values	0, 1, 2, 3, 4, 5, 6, 7, 8, 9, Default(3)	Default(3)
y_axis_format	<string></string>	Format used to display Y axis values	Automatic, General, Scientific, Default(Automatic)	Default(Automatic)
y2_axis_decimal_places	<string></string>	Number of decimal places displayed for second Y axis values		Default(3)
y2_axis_format	<string></string>	Format used to display second Y axis values	Automatic, General, Scientific, Default(Automatic)	Default(Automatic)
colours				
background_colour	<string></string>	colour	MAGENTA, YELLOW, ORANGE, TURQUOISE, INDIGO, LIME, SKY, PINK, PALE_YELLOW, GOLD, OLIVE, DARK_MAGENTA, MEDIUM_GREEN, MEDIUM_BLUE, HOT_PINK, LIGHT_PINK, SEA_GREEN, MAROON, DARK_GREEN, PURPLE, NAVY, DARK_GREY, MEDIUM_GREY, LIGHT_GREY, USER_1, USER_2, USER_3, USER_4, USER_5, USER_6, COL_1, COL_2, COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10, COL_11, COL_12, COL_13, COL14, COL_15, COL_16, COL_17, COL_18, COL_19, COL_20, COL_21, COL_22, COL_23, COL_24, COL_25, COL_26, COL_27, COL_28, COL_24, COL_25, COL_26, COL_27, COL_28, COL_29, COL_30, COL_31, COL_32, COL_33, COL_34, COL_35, COL_31, COL_32, COL_33, COL_34, COL_35, COL_36	BLACK
foreground_colour	<string></string>	colour	WHITE, BLACK, RED, GREEN, BLUE, CYAN, MAGENTA, YELLOW, ORANGE, TURQUOISE, INDIGO, LIME, SKY, PINK, PALE_YELLOW, GOLD, OLIVE, DARK_MAGENTA, MEDIUM_GREEN, MEDIUM_BLUE, HOT_PINK, LIGHT_PINK, SEA_GREEN, MAROON, DARK_GREEN, PURPLE, NAVY, DARK_GREY, MEDIUM_GREY, LIGHT_GREY, USER_1, USER_2, USER_3, USER_4, USER_5, USER_6, COL_1, COL_2, COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10, COL_11, COL_12, COL_13, COL14, COL_15, COL_16, COL_17, COL_18, COL_19, COL_20, COL_21, COL_22, COL_23, COL_24, COL_25, COL_26, COL_27, COL_28, COL_24, COL_25, COL_26, COL_27, COL_28, COL_29, COL_30, COL_31, COL_32, COL_33, COL_34, COL_35, COL_36, COL_32, COL_33, COL_34, COL_35, COL_36, COL_32, COL_33, COL_34, COL_35, COL_36, COL_36, COL_32, COL_33, COL_34, COL_35, COL_36, COL_32, COL_33, COL_34, COL_35, COL_36, COL_36, COL_32, COL_33, COL_34, COL_35, COL_36, COL_36, COL_32, COL_33, COL_34, COL_35, COL_36, COL_36, COL_36, COL_37, COL	WHITE
user_colour1	<string></string>	User defined colour 1 (HEX RRGGBB value)		<none></none>
user_colour2	<string></string>	User defined colour 2 (HEX RRGGBB value)		<none></none>
user_colour3	<string></string>	User defined colour 3 (HEX RRGGBB value)		<none></none>

user_colour4	User defined colour 4 (HEX RRGGBB value)	<none></none>
user_colour5	User defined colour 5 (HEX RRGGBB value)	<none></none>
user_colour6	User defined colour 6 (HEX RRGGBB value)	<none></none>

The following options control the preferred order of data sources for various entities

Preference	Туре	Description	Valid arguments	Default
			TRUE, FALSE	FALSE
global	<ordered></ordered>	Data source for global data	LSDA, ASCII, THF. none	<none></none>
part	<ordered></ordered>	Data source for part data	LSDA, ASCII, THF, none	<none></none>
node	<ordered></ordered>	Data source for node data	THF, LSDA, ASCII, none	<none></none>
eleme	nts			
solid		Data source for solid data	THF, LSDA, none	<none></none>
beam		Data source for beam data	THF, LSDA, none	<none></none>
shell		Data source for shell data	THF, LSDA, none	<none></none>
tshell		Data source for thick shell data	THF, LSDA, none	<none></none>
spring		Data source for spring data	LSDA, ASCII, XTF. none	<none></none>
seatbelt	<ordered></ordered>	Data source for seatbelt data	LSDA, ASCII, XTF, none	<none></none>
retractor	<ordered></ordered>	Data source for retractor data	LSDA, ASCII, XTF. none	<none></none>
slipring	<ordered></ordered>	Data source for slipring data	LSDA, ASCII, XTF. none	<none></none>
wall	<ordered></ordered>	Data source for rigid wall data	LSDA, ASCII, XTF, none	<none></none>
contact	<ordered></ordered>	Data source for contact data	LSDA, ASCII, XTF, none	<none></none>
reaction	<ordered></ordered>	Data source for nodal reaction data	LSDA, ASCII, XTF. none	<none></none>
airbag		Data source for airbag data	LSDA, ASCII, XTF, none	<none></none>
joint	<ordered></ordered>	Data source for joint data	LSDA, ASCII, none	<none></none>
section	<ordered></ordered>	Data source for section data	LSDA, ASCII, none	<none></none>
subsystem	<ordered></ordered>	Data source for subsystems data	LSDA, ASCII, none	<none></none>
geo contact	<ordered></ordered>	Data source for geometric contact data	LSDA, ASCII, none	<none></none>
nodal rb		Data source for nodal rigid body data	LSDA, ASCII, none	
weld		Data source for spotweld data	LSDA, ASCII, none	
spc		Data source for spc data	LSDA, ASCII, none	
boundary		Data source for boundary data	LSDA, ASCII, none	
fsi		Data source for fluid structural interaction data	LSDA, ASCII, none	
sph		Data source for SPH data	LSDA, ASCII, none	
tracer		Data source for TRACER data	LSDA, ASCII, none	
pulley		Data source for PULLEY data	LSDA, ASCII, none	
prtube		Data source for PRTUBE data	LSDA, ASCII, none	
pblast		Data source for Particle Blast data	LSDA, ASCII, none	
bearing		Data source for BEARING data	LSDA, ASCII, none	_
ocaring	viuered>	Pata source for DEAKTING Gata	LSDA, ASCII, HONE	Knone>

The following strings and values control axes, title, and legend formatting for graphs

Preference	Туре			Default
title_size			8, 10, 12, 14, 18, 24, Default	Default
title_font	Ū	Font for title	Helvetica_Medium, Helvetica_Bold, Courier_Medium, Courier Bold, Times Medium, Times bold, Default	Default
title_colour		title	FOREGROUND, WHITE, BLACK, RED, GREEN, BLUE, CYAN, MAGENTA, YELLOW, ORANGE, TURQUOISE, INDIGO, LIME, SKY, PINK, PALE_YELLOW, GOLD, OLIVE, DARK_MAGENTA, MEDIUM_GREEN, MEDIUM_BLUE, HOT_PINK, LIGHT_PINK, SEA_GREEN, MAROON, DARK_GREEN, PURPLE, NAVY, DARK_GREY, MEDIUM_GREY, LIGHT_GREY, USER_1, USER_2, USER_3, USER_4, USER_5, USER_6, COL_1, COL_2, COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10, COL_11, COL_12, COL_13, COL14, COL_15, COL_16, COL_17, COL_18, COL_19, COL_20, COL_21, COL_22, COL_23, COL_24, COL_25, COL_26, COL_27, COL_28, COL_29, COL_30, COL_31, COL_32, COL_33, COL_34, COL_35, COL_36	
x_label_size		X axis label	8, 10, 12, 14, 18, 24, Default	Default
x_label_font	Ŭ	axis label	Helvetica_Medium, Helvetica_Bold, Courier_Medium, Courier Bold, Times Medium, Times bold, Default	Default
x_label_colour		axis label	FOREGROUND, WHITE, BLACK, RED, GREEN, BLUE, CYAN, MAGENTA, YELLOW, ORANGE, TURQUOISE, INDIGO, LIME, SKY, PINK, PALE_YELLOW, GOLD, OLIVE, DARK_MAGENTA, MEDIUM_GREEN, MEDIUM_BLUE, HOT_PINK, LIGHT_PINK, SEA_GREEN, MAROON, DARK_GREEN, PURPLE, NAVY, DARK_GREY, MEDIUM_GREY, LIGHT_GREY, USER_1, USER_2, USER_3, USER_4, USER_5, USER_6, COL_1, COL_2, COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10, COL_11, COL_12, COL_13, COL14, COL_15, COL_16, COL_17, COL_18, COL_19, COL_20, COL_21, COL_22, COL_23, COL_24, COL_25, COL_26, COL_27, COL_28, COL_29, COL_30, COL_31, COL_32, COL_33, COL_34, COL_35, COL_36	FOREGROUND
x_axis_size		X axis units	8, 10, 12, 14, 18, 24, Default	Default
x_axis_font		axis units	Courier Bold, Times Medium, Times bold, Default	Default
x_axis_colour	<string></string>	axis units	FOREGROUND, WHITE, BLACK, RED, GREEN, BLUE, CYAN, MAGENTA, YELLOW, ORANGE, TURQUOISE, INDIGO, LIME, SKY, PINK, PALE_YELLOW, GOLD, OLIVE, DARK_MAGENTA, MEDIUM_GREEN, MEDIUM_BLUE, HOT_PINK, LIGHT_PINK, SEA_GREEN, MAROON, DARK_GREEN, PURPLE, NAVY, DARK_GREY, MEDIUM_GREY, LIGHT_GREY, USER_1, USER_2, USER_3, USER_4, USER_5, USER_6, COL_1, COL_2, COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10, COL_11, COL_12, COL_13, COL14, COL_15, COL_16, COL_17, COL_18, COL_19, COL_20, COL_21, COL_22, COL_23, COL_24, COL_25, COL_26, COL_27, COL_28, COL_29, COL_30, COL_31, COL_32, COL_33, COL_34, COL_35, COL_36	
y_label_size		Y axis label	8, 10, 12, 14, 18, 24, Default	Default
y_label_font	<string></string>		Helvetica_Medium, Helvetica_Bold, Courier_Medium, Courier_Bold, Times_Medium, Times_bold, Default	Default

y_label_colour		Colour of Y axis label	FOREGROUND, WHITE, BLACK, RED, GREEN, BLUE, CYAN, MAGENTA, YELLOW, ORANGE, TURQUOISE, INDIGO, LIME, SKY, PINK, PALE_YELLOW, GOLD, OLIVE, DARK_MAGENTA, MEDIUM_GREEN, MEDIUM_BLUE, HOT_PINK, LIGHT_PINK, SEA_GREEN, MAROON, DARK_GREEN, PURPLE, NAVY, DARK_GREY, MEDIUM_GREY, LIGHT_GREY, USER_1, USER_2, USER_3, USER_4, USER_5, USER_6, COL_1, COL_2, COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10, COL_11, COL_12, COL_13, COL14, COL_15, COL_16, COL_17, COL_18, COL_19, COL_20, COL_21, COL_22, COL_23, COL_24, COL_25, COL_26, COL_27, COL_28, COL_29, COL_30, COL_31, COL_32, COL_33, COL_34, COL_35, COL_36, COL_35, COL_36, COL_36, COL_37, COL_36, COL_37, COL_37, COL_37, COL_38, COL_38, COL_39, COL_30, COL_31, COL_32, COL_33, COL_34, COL_35, COL_35, COL_36, COL_35, COL_36, COL_37, COL_36, COL_35, COL_36, COL_37,	FOREGROUND
y_axis_size	<string></string>	Font size for Y axis units		Default
y_axis_font			Helvetica_Medium, Helvetica_Bold, Courier_Medium, Courier Bold, Times Medium, Times bold, Default	Default
y_axis_colour		Colour of Y axis units	FOREGROUND, WHITE, BLACK, RED, GREEN, BLUE, CYAN, MAGENTA, YELLOW, ORANGE, TURQUOISE, INDIGO, LIME, SKY, PINK, PALE_YELLOW, GOLD, OLIVE, DARK_MAGENTA, MEDIUM_GREEN, MEDIUM_BLUE, HOT_PINK, LIGHT_PINK, SEA_GREEN, MAROON, DARK_GREEN, PURPLE, NAVY, DARK_GREY, MEDIUM_GREY, LIGHT_GREY, USER_1, USER_2, USER_3, USER_4, USER_5, USER_6, COL_1, COL_2, COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10, COL_11, COL_12, COL_13, COL14, COL_15, COL_16, COL_17, COL_18, COL_19, COL_20, COL_21, COL_22, COL_23, COL_24, COL_25, COL_26, COL_27, COL_28, COL_29, COL_30, COL_31, COL_32, COL_33, COL_34, COL_35, COL_36	FOREGROUND
y2_label_size		Font size for second Y axis label	8, 10, 12, 14, 18, 24, Default	Default
y2_label_font	<string></string>	Font for second Y axis label	Courier_Bold, Times_Medium, Times_bold, Default	Default
y2_label_colour		second Y axis label	FOREGROUND, WHITE, BLACK, RED, GREEN, BLUE, CYAN, MAGENTA, YELLOW, ORANGE, TURQUOISE, INDIGO, LIME, SKY, PINK, PALE_YELLOW, GOLD, OLIVE, DARK_MAGENTA, MEDIUM_GREEN, MEDIUM_BLUE, HOT_PINK, LIGHT_PINK, SEA_GREEN, MAROON, DARK_GREEN, PURPLE, NAVY, DARK_GREY, MEDIUM_GREY, LIGHT_GREY, USER_1, USER_2, USER_3, USER_4, USER_5, USER_6, COL_1, COL_2, COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10, COL_11, COL_12, COL_13, COL14, COL_15, COL_16, COL_17, COL_18, COL_19, COL_20, COL_21, COL_22, COL_23, COL_24, COL_25, COL_26, COL_27, COL_28, COL_29, COL_30, COL_31, COL_32, COL_33, COL_34, COL_35, COL_36, COL_35, COL_36, COL_35, COL_36, COL_35, COL_36, COL_37, COL_36, COL_37, COL_38, COL_35, COL_36, COL_36, COL_37, COL_36, COL_37, COL_36, COL_37, COL_37, COL_37, COL_37, COL_38, COL_35, COL_36, COL_37, COL_36, COL_35, COL_36, COL_37, COL_36, COL_37,	FOREGROUND
y2_axis_size		Font size for second Y axis units		Default
y2_axis_font	<string></string>		Helvetica_Medium, Helvetica_Bold, Courier_Medium, Courier_Bold, Times_Medium, Times_bold, Default	Default

y2_axis_colour	<string></string>	second Y axis units	FOREGROUND, WHITE, BLACK, RED, GREEN, BLUE, CYAN, MAGENTA, YELLOW, ORANGE, TURQUOISE, INDIGO, LIME, SKY, PINK, PALE_YELLOW, GOLD, OLIVE, DARK_MAGENTA, MEDIUM_GREEN, MEDIUM_BLUE, HOT_PINK, LIGHT_PINK, SEA_GREEN, MAROON, DARK_GREEN, PURPLE, NAVY, DARK_GREY, MEDIUM_GREY, LIGHT_GREY, USER_1, USER_2, USER_3, USER_4, USER_5, USER_6, COL_1, COL_2, COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10, COL_11, COL_12, COL_13, COL14, COL_15, COL_16, COL_17, COL_18, COL_19, COL_20, COL_21, COL_22, COL_23, COL_24, COL_25, COL_26, COL_27, COL_28, COL_29, COL_30, COL_31, COL_32, COL_33, COL_34, COL_35, COL_36, COL_35, COL_36, COL_35, COL_36, COL_37, COL_36, COL_37, COL_37, COL_38, COL_38, COL_39, COL_30, COL_31, COL_32, COL_33, COL_34, COL_35, COL_35, COL_36, COL_35, COL_36, COL_37, COL_36, COL_35, COL_36, COL_37,	FOREGROUND
legend_size	<string></string>	Font size for curve legends		Default
legend_font	<string></string>		Helvetica_Medium, Helvetica_Bold, Courier_Medium, Courier_Bold, Times_Medium, Times_bold, Default	Default
legend_colour		curve legends	FOREGROUND, WHITE, BLACK, RED, GREEN, BLUE, CYAN, MAGENTA, YELLOW, ORANGE, TURQUOISE, INDIGO, LIME, SKY, PINK, PALE_YELLOW, GOLD, OLIVE, DARK_MAGENTA, MEDIUM_GREEN, MEDIUM_BLUE, HOT_PINK, LIGHT_PINK, SEA_GREEN, MAROON, DARK_GREEN, PURPLE, NAVY, DARK_GREY, MEDIUM_GREY, LIGHT_GREY, USER_1, USER_2, USER_3, USER_4, USER_5, USER_6, COL_1, COL_2, COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10, COL_11, COL_12, COL_13, COL14, COL_15, COL_16, COL_17, COL_18, COL_19, COL_20, COL_21, COL_22, COL_23, COL_24, COL_25, COL_26, COL_27, COL_28, COL_29, COL_30, COL_31, COL_32, COL_33, COL_34, COL_35, COL_36	
legend_display_lines	s <string></string>	Turn User Lines On/Off	ON, OFF	ON

The following strings and values control how T/HIS starts

Preference	Туре	Description	Valid arguments	Default
auto_hide	<logical></logical>	Auto-hides graph toobar	TRUE, FALSE	FALSE
graphics_type	<string></string>	Graphics format to start T/HIS with	OPENGL, TTY, DEFAULT	OPENGL
maximise	<logical></logical>	Maximise window when Γ/HIS started	TRUE, FALSE	FALSE
image_format	<string></string>	Default image format	BMP_8_C, BMP_8_UN, PNG_8, GIF_8, BMP_24_UN, PNG_24, JPG_24, PPM_24	PNG_24
intel_hd_use_shaders	<string></string>	Control usage of hardware shaders on Intel HD graphics cards	AUTO_DETECT, FORCE_OFF, FORCE_ON	AUTO_DETECT
placement	<string></string>	window on multi-screen	LEFT, RIGHT, BOTTOM, TOP, LEFT_BOTTOM, LEFT_TOP, RIGHT_BOTTOM, RIGHT_TOP	<none></none>
rhs_number_columns	<integer></integer>	Number of columns of Tools buttons	4 - 50	4
white_background_image	<logical></logical>	Write images with white background	TRUE, FALSE	FALSE
bg_img_on	<string></string>	Turn the Background Image on or off.	ON, OFF	<none></none>
bg_img_path	<string></string>	Valid Background Image file path		<none></none>
bg_img_scale	<string></string>	Preset Background Image scaling	WIDTH, HEIGHT, W+H	<none></none>
bg_img_fact	<real></real>	Scale factor for Background Image Size		1

bg_img_just		Background Image Justification	N, NE, E, SE, S, SW, W, NW	<none></none>
bg_img_pos		Background Image Positioning	TILED, SINGLE	SINGLE
window_layout	<string></string>	Multiple window layout type	TILE_WIDE, TILE_TALL, CASCADE, 1X1, 2X2, 3X3, XY	TILE_WIDE
x_layout		Number used for 'X x Y' avout, number of cols	1 - 8	1
y_layout		Number used for 'X x Y' ayout, number of rows	1 - 8	1
page_width		Width of the page (pixels)		<none></none>
page_height	<integer></integer>	Height of the page (pixels)		<none></none>

The following strings and values control laser plotting setup

Preference	Туре	Description	Valid arguments	Default
laser_paper_size	<string></string>	Default paper size	A4, A3, US	A4
laser_orientation	<string></string>	Default page orientation	Portrait, Landscape	Landscape
laser_top_margin	<real></real>	Top margin size in mm		10
laser_bottom_margin	<real></real>	Bottom margin size in mm		30
laser_left_margin	<real></real>	Left margin size in mm		20
laser_right_margin	<real></real>	Right margin size in mm		10

The following options affect the appearance and behaviour of the graphical user interface, left handed support, and the mouse

Preference	Туре	Description	Valid arguments	Default
display_factor	<real></real>	Factor on display size (0.5 - 2.0, automatic if undefined)	0.5 - 2.0	1.2
display_brightness	<real></real>	Menu brightness (0.0-1.0)	0.0 - 1.0	1.0
display_saturation	<real></real>	Menu colour saturation (0.0-1.0)	0.0 - 1.0	1.0
button_gradation	<real></real>	Button shade gradation (0.0-1.0)	0.0 - 1.0	0.0
dv_sync_windows	<string></string>		ICON, ICON+CAPS, ICON+NUM, ICON+CAPS+NUM	ICON+CAPS
dv_left_shift	<string></string>		ROTATION_XYZ, ROTATION_XY, ROTATION_Z, ROTATION_SPHERE, TRANSLATION, ZOOM_UP_+VE, ZOOM_DOWN_+VE, UNUSED	ROTATION_XYZ
dv_middle_shift			ROTATION_XYZ, ROTATION_XY, ROTATION_Z, ROTATION_SPHERE, FRANSLATION, ZOOM_UP_+VE, ZOOM_DOWN_+VE, UNUSED	TRANSLATION
dv_right_shift			ROTATION_XYZ, ROTATION_XY, ROTATION_Z, ROTATION_SPHERE, TRANSLATION, ZOOM_UP_+VE, ZOOM_DOWN_+VE, UNUSED	ZOOM_UP_+VE
dv_left_ctrl		ctrl + Left mouse	ROTATION_XYZ, ROTATION_XY, ROTATION_Z, ROTATION_SPHERE, TRANSLATION, ZOOM_UP_+VE, ZOOM_DOWN_+VE, UNUSED	ROTATION_XYZ
dv_middle_ctrl	<string></string>	Dyn view action for ctrl + Middle mouse	ROTATION_XYZ, ROTATION_XY, ROTATION_Z, ROTATION_SPHERE, TRANSLATION, ZOOM_UP_+VE, ZOOM_DOWN_+VE, UNUSED	TRANSLATION
dv_right_ctrl	<string></string>		ROTATION_XYZ, ROTATION_XY, ROTATION_Z, ROTATION_SPHERE, TRANSLATION, ZOOM_UP_+VE, ZOOM_DOWN_+VE, UNUSED	ZOOM_UP_+VE

dv_left_both	<string></string>		ROTATION_XYZ, ROTATION_XY, ROTATION_Z, ROTATION_SPHERE, TRANSLATION, ZOOM_UP_+VE, ZOOM_DOWN_+VE, UNUSED	ROTATION_XYZ
dv_middle_both	<string></string>		ROTATION_XYZ, ROTATION_XY, ROTATION_Z, ROTATION_SPHERE, TRANSLATION, ZOOM_UP_+VE, ZOOM_DOWN_+VE, UNUSED	TRANSLATION
dv_right_both	<string></string>		ROTATION_XYZ, ROTATION_XY, ROTATION_Z, ROTATION_SPHERE, TRANSLATION, ZOOM_UP_+VE, ZOOM_DOWN_+VE, UNUSED	ZOOM_UP_+VE
dv_shift_action	<string></string>	Dynamic viewing mode for shift + mouse button	CURRENT, WIREFRAME, FREE_EDGE, UNUSED	CURRENT
dv_ctrl_action	<string></string>	Dynamic viewing mode for ctrl + mouse button	CURRENT, WIREFRAME, FREE_EDGE, UNUSED	WIREFRAME
dv_both_action	<string></string>	Dynamic viewing	CURRENT, WIREFRAME, FREE_EDGE, UNUSED	FREE_EDGE
font_scaling	<logical></logical>	whether text in GUI buttons can be scaled down to fit	TRUE, FALSE	TRUE
font_silent	<logical></logical>	whether to write explanatory text if wanted fonts are not found	TRUE, FALSE	FALSE
font_size	<string></string>	Menu font size	SMALL, DEFAULT, LARGE	DEFAULT
font_type			HELVETICA, HELVETICA-BOLD, TIMES, TIMES-BOLD, COURIER, COURIER-BOLD	HELVETICA
left_handed	<string></string>	Left handed switching of mouse and/or keyboard	NONE, MOUSE, KEYBOARD, ALL	NONE
zoom_factor	<real></real>	Zoom Factor for mouse wheel (0.01-1.0)	0.01 - 1.0	0.05
czoom_factor	<real></real>	Factor for right mouse dynamic zoom (0.01-0.2)	0.01 - 0.2	0.05
kzoom_factor	<real></real>	Factor for +/- keyboard short-cut keys	0.01 - 100.0	2.0
menu_dragging_mode	<string></string>	Mode used when moving menu panels with the mouse	WIREFRAME, OPAQUE	WIREFRAME
mouse_action_middle_button	<string></string>	Set the action for the middle mouse key during picking	APPLY, REJECT, DESELECT	REJECT
mouse_action_right_button	<string></string>	Set the action for the right mouse key during picking	APPLY, REJECT, DESELECT	REJECT

The following control settings related to quickfind

Preference	Туре	Description	Valid arguments	Default

quickfind_unmatched_text_colour	<string></string>	Text colour for unmatched characters Text colour for matched characters	MAGENTA, YELLOW, ORANGE, TURQUOISE, INDIGO, LIME, SKY, PINK, PALE_YELLOW, GOLD, OLIVE, DARK_MAGENTA, MEDIUM_GREEN, MEDIUM_BLUE, HOT_PINK, LIGHT_PINK, SEA_GREEN, MAROON, DARK_GREEN, PURPLE, NAVY, DARK_GREY, MEDIUM_GREY, LIGHT_GREY, USER_1, USER_2, USER_3, USER_4, USER_5, USER_6, COL_1, COL_2, COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10, COL_11, COL_12, COL_13, COL_14, COL_25, COL_26, COL_27, COL_28, COL_24, COL_25, COL_26, COL_27, COL_28, COL_29, COL_30, COL_31, COL_32, COL_33, COL_34, COL_35, COL_36, COL_31, COL_36, COL_37, COL_38, COL_39, COL_30, COL_31, COL_50,	BLUE
quickfind_found_list_length	<integer></integer>	Number of items to display in the found list	COL 32, COL 33, COL 34, COL 35, COL 36 1 - 20	10
quickfind_recent_history	<integer></integer>	Number of recently selected items to store	0 - 2147483646	10

The following options define how Javascripts are processed by THIS. See <u>section 5.23</u> for further details.

Preference	Туре		Valid arguments	Default
modules_directory		Directory for T/HIS to look for modules in		<none></none>
script_directory		Directory in which T/HIS looks for scripts		\$OA_INSTALL/this_library/scripts
javascript_memory_size		Maximum memory allocated for garbage collection		25

The following options control the T/HIS session save/retrieve. See <u>Section 5.25</u> for further details.

Preference	Туре	Description	Valid arguments	Default
session_auto_save	<string></string>	Save a session unconditionally on exit	ON, OFF	OFF
session_save_option	<string></string>	, c	HOME, USER_DEFINED, DESKTOP	HOME
session_save_dir	<string></string>	User-defined location for session save		
session_embed_cur/csv_data	_	Embed the cur and csv files used into the session	ON, OFF	OFF
session_embed_curve_data	<string></string>	Embed the curve data into the session	ON, OFF	OFF
show_session_retrieve_on_start		A pop-up panel to retrieve a saved T/HIS session file would show up every time T/HIS is launched	ON, OFF	OFF

Keys can have functions assigned to them:

Preference	Туре	Description	Valid arguments	Default
F1_key	<string></string>	Shortcut for F1		<none></none>
F2_key	<string></string>	Shortcut for F2		<none></none>
F3_key	<string></string>	Shortcut for F3		<none></none>
F4_key	<string></string>	Shortcut for F4		<none></none>
F5_key	<string></string>	Shortcut for F5		<none></none>
F6_key	<string></string>	Shortcut for F6		<none></none>
F7_key	<string></string>	Shortcut for F7		<none></none>
F8_key	<string></string>	Shortcut for F8		<none></none>
F9_key	<string></string>	Shortcut for F9		<none></none>
F10_key	<string></string>	Shortcut for F10		<none></none>
F11_key	<string></string>	Shortcut for F11		<none></none>
F12_key	<string></string>	Shortcut for F12		<none></none>
A_key	<string></string>	Shortcut for A		AUTOSCALE
B_key	<string></string>	Shortcut for B		BLANK
C_key	<string></string>	Shortcut for C		CURVE_MENU
D_key	<string></string>	Shortcut for D		DATUM_MENU
E_key	<string></string>	Shortcut for E		<none></none>
F_key	<string></string>	Shortcut for F		FAST_TCF_MENU
G_key	<string></string>	Shortcut for G		NEW_WINDOW
H_key	<string></string>	Shortcut for H		<none></none>
I_key	<string></string>	Shortcut for I		<none></none>
J_key	<string></string>	Shortcut for J		JAVASCRIPT_MENU
K_key	<string></string>	Shortcut for K		<none></none>
L_key	<string></string>	Shortcut for L		<none></none>
M_key	<string></string>	Shortcut for M		<none></none>
N_key	<string></string>	Shortcut for N		EDIT_NEXT
O_key	<string></string>	Shortcut for O		<none></none>
P_key	<string></string>	Shortcut for P		PLOT
Q_key	<string></string>	Shortcut for Q		QUICK_PICK
R_key	<string></string>	Shortcut for R		REVERSE
S_key	<string></string>	Shortcut for S		<none></none>

T. 1		EIDA VENITO
T_key	Shortcut for T 	TIDY_MENUS
U_key	Shortcut for U <string></string>	UNBLANK
V_key	Shortcut for V <string></string>	CURVE_GROUP
W_key	Shortcut for W <string></string>	<none></none>
X_key	Shortcut for X <string></string>	CURVE_TABLE
Y_key	Shortcut for Y <string></string>	Y_AUTOSCALE
Z_key	Shortcut for Z <string></string>	ZOOM
a_key	Shortcut for a <string></string>	AUTOSCALE
b_key	Shortcut for b <string></string>	BLANK
c_key	Shortcut for c	CURVE_MENU
d_key	Shortcut for d	DATUM_MENU
e_key	Shortcut for e	<none></none>
f_key	Shortcut for f	FAST_TCF_MENU
g_key	Shortcut for g	NEW_WINDOW
h_key	Shortcut for h	<none></none>
i_key	Shortcut for i <string></string>	<none></none>
j_key	Shortcut for j	JAVASCRIPT_MENU
k_key	Shortcut for k <string></string>	<none></none>
l_key	Shortcut for l	<none></none>
m_key	Shortcut for m <string></string>	<none></none>
n_key	Shortcut for n <string></string>	EDIT_NEXT
o_key	Shortcut for o	<none></none>
p_key	Shortcut for p	PLOT
q_key	Shortcut for q <string></string>	QUICK_PICK
r_key	Shortcut for r <string></string>	REVERSE
s_key	Shortcut for s <string></string>	<none></none>
t_key	Shortcut for t <string></string>	TIDY_MENUS
u_key	Shortcut for u <string></string>	UNBLANK
v_key	Shortcut for v <string></string>	CURVE_GROUP
w_key	Shortcut for w <string></string>	<none></none>
x_key	Shortcut for x <string></string>	CURVE_TABLE
y_key	Shortcut for y <string></string>	Y_AUTOSCALE

z_key	Shortcut for z <string></string>	ZOOM
SPACE_key	Shortcut for space <string></string>	PLOT
ZERO_key	Shortcut for 0 <string></string>	COPY_AXIS
ONE_key	Shortcut for 1	TILE_TALL
TWO_key	<pre><string></string></pre>	TILE_WIDE
 THREE_key	<pre><string> Shortcut for 3</string></pre>	CASCADE
FOUR_key	<pre><string> Shortcut for 4</string></pre>	LAYOUT_1X1
FIVE_key	<pre><string> Shortcut for 5</string></pre>	LAYOUT_2X2
SIX_key	<string> Shortcut for 6</string>	LAYOUT_3X3
SEVEN_key	<pre><string> Shortcut for 7</string></pre>	<none></none>
EIGHT_key	<pre><string> Shortcut for 8</string></pre>	<none></none>
NINE_key	<pre><string> Shortcut for 9</string></pre>	<none></none>
·	<string></string>	
EXCLAMATION_key	Shortcut for ! <string></string>	<none></none>
DOUBLEQUOTE_key	Shortcut for " <string></string>	<none></none>
HASH_key	Shortcut for # <string></string>	<none></none>
DOLLAR_key	Shortcut for \$ <string></string>	<none></none>
PERCENT_key	Shortcut for % <string></string>	<none></none>
AMPERSAND_key	Shortcut for & <string></string>	<none></none>
SINGLEQUOTE_key	Shortcut for ' <string></string>	<none></none>
LEFTBRACKET_key	Shortcut for (<string></string>	<none></none>
RIGHTBRACKET_key	Shortcut for) <string></string>	<none></none>
ASTERISK_key	Shortcut for *	<none></none>
PLUS_key	<pre><string> Shortcut for +</string></pre>	ZOOM_IN
COMMA_key	<pre><string> Shortcut for ,</string></pre>	<none></none>
 MINUS_key	<string> Shortcut for -</string>	ZOOM_OUT
DOT_key	<pre><string> Shortcut for .</string></pre>	<none></none>
SLASH_key	<string> Shortcut for /</string>	SHORTCUT
COLON_key	<string> Shortcut for:</string>	<none></none>
SEMICOLON_key	<pre><string> Shortcut for ;</string></pre>	<none></none>
LESSTHAN_key	<string> Shortcut for <</string>	<none></none>
EQUALS_key	<pre><string> Shortcut for =</string></pre>	ZOOM_IN
GREATERTHAN_key	<pre>shortcut for = <string> Shortcut for ></string></pre>	
UKEATEKTHAN_KEY	Snortcut for > <string></string>	<none></none>

QUESTIONMARK_key	Shortcut for ?	SHORTCUT
_ '	<string></string>	
AT_key	Shortcut for @	<none></none>
[,	<string></string>	
LEFTSQUAREBRACKET_key	Shortcut for [<none></none>
	<string></string>	
BACKSLASH_key	Shortcut for \	<none></none>
[<string></string>	
RIGHTSQUAREBRACKET_key		<none></none>
	<string></string>	
CIRCUMFLEX_key	Shortcut for ^	<none></none>
_ ,	<string></string>	
UNDERSCORE_key	Shortcut for	ZOOM_OUT
_ ,	<string></string>	_
BACKTICK_key	Shortcut for '	<none></none>
	<string></string>	
LEFTCURLYBRACKET_key	Shortcut for {	<none></none>
_ ,	<string></string>	
PIPE_key	Shortcut for	<none></none>
_ ,	<string></string>	
RIGHTCURLYBRACKET_key	Shortcut for }	<none></none>
_ ,	<string></string>	
TILDE_key	Shortcut for ~	<none></none>
	<string></string>	

The following strings control the T/HIS header and version number at the bottom right of the plot space

Preference	Туре	Description	Valid arguments	Default
user_text_line_1	<string></string>	Text for line		<none></none>
user_text_line_2	<string></string>	Text for line		<none></none>
user_text_line_3	<string></string>	Text for line		<none></none>
user_text_line_4	<string></string>	Text for line		<none></none>
user_text_line_5	<string></string>	Text for line		<none></none>
user_text_line_6	<string></string>	Text for line		<none></none>
user_text_size_1	<string></string>	Size of text on line 1	8, 10, 12, 14, 18, 24, Default	Default
user_text_size_2			8, 10, 12, 14, 18, 24, Default	Default
user_text_size_3	<string></string>		8, 10, 12, 14, 18, 24, Default	Default
user_text_size_4	<string></string>		8, 10, 12, 14, 18, 24, Default	Default
user_text_size_5			8, 10, 12, 14, 18, 24, Default	Default
user_text_size_6			8, 10, 12, 14, 18, 24, Default	Default
user_text_font	<string></string>		Helvetica_Medium, Helvetica_Bold, Courier_Medium, Courier Bold, Times Medium, Times bold, Default	Default
user_text_coloui		user text	FOREGROUND, WHITE, BLACK, RED, GREEN, BLUE, CYAN, MAGENTA, YELLOW, ORANGE, TURQUOISE, INDIGO, LIME, SKY, PINK, PALE_YELLOW, GOLD, OLIVE, DARK_MAGENTA, MEDIUM_GREEN, MEDIUM_BLUE, HOT_PINK, LIGHT_PINK, SEA_GREEN, MAROON, DARK_GREEN, PURPLE, NAVY, DARK_GREY, MEDIUM_GREY, LIGHT_GREY, USER_1, USER_2, USER_3, USER_4, USER_5, USER_6, COL_1, COL_2, COL_3, COL_4, COL_5, COL_6, COL_7, COL_8, COL_9, COL_10, COL_11, COL_12, COL_13, COL14, COL_15, COL_16, COL_17, COL_21, COL_22, COL_23, COL_24, COL_25, COL_26, COL_27, COL_22, COL_23, COL_24, COL_25, COL_26, COL_27, COL_28, COL_29, COL_30, COL_31, COL_32, COL_33, COL_34, COL_35, COL_34, COL_35, COL_36	FOREGROUND

The following control treatment of unicode

Preference	Туре	Description	Valid arguments	Default
cjk_unix_font	<string></string>	Font to use for CJK text on unix machines		-misc-fixed-medium-r-normal-*-12-*-*-*-*-*
cjk_windows_font	<string></string>			MS Gothic 12
file_encoding		encoding for script files	Latin-1, BIG5, EUC-CN, EUC-JP, EUC-KR, GB, GBK, ISO-2022-CN, ISO-2022-CN-EXT, ISO-2022-JP, ISO-2022-JP-2, ISO-2022-KR, JOHAB, Shift-JIS, UTF-8, UTF-16BE, UTF-16LE, UTF-16, UTF-32BE, UTF-32LE, UTF-32	Latin-1

The following strings and values control the display of UNIT information in T/HIS

Preference	Туре	Description	Valid arguments	Default
model_units	_		U1 m:kg:s (SI), U2 mm:T:s, U3 mm:kg:ms, U4 mm:gm:ms, U5 ft:slug:s, U6 m:T:s	U1 m:kg:s (SI)
display_units			U1 m:kg:s (SI), U2 mm:T:s, U3 mm:kg:ms, U4 mm:gm:ms, U5 ft:slug:s, U6 m:T:s	U1 m:kg:s (SI)
write_csv_units		Write UNIT information to CSV files	TRUE, FALSE	TRUE

The following is an example file. Note that blank lines and lines not beginning **programme names:** are ignored, so comment lines may be added if required. However, lines to be read must start at column 1 and there must not be any gaps in the keyword.

this*laser_paper_size: A4
this*laser_orientation: Landscape
this*laser_mode: Greyscale
this*user_text_line_2: Design Project
this*user text line 4: Phase II Results

The user preferences option is not available in command line mode, however the **oa_pref** file is read and applied. Setting paper size and margins can therefore only be done through this method.

Global preferences.

From version 9.3 onwards global preferences that apply to all programs can be specified using "oasys" as the program name.

oasys*<keyword>: <argument

At present the following global preferences can be defined

If a preference is defined twice using both "oasys*" and "this*" then the "this*" setting will override the global setting.

Preference	Туре	Description	Valid arguments	Default
file_names		Controls input filename syntax. LSTC = d3*, OASYS = job.ptf*		OASYS
html_application	<string></string>	Location of HTML browser		<none></none>

html_application_linux	<string></string>	Location of HTML browser for linux (use if the same oa_pref file is used for windows and linux)		<none></none>
html_application_windows		Location of HTML browser for windows (use if the same oa_pref file is used for windows and linux)		<none></none>
image_format	<string></string>		BMP_8_C, BMP_8_UN, PNG_8, GIF_8, BMP_24_UN, PNG_24, JPG_24, PPM_24	JPG_24
intel_hd_use_shaders	<string></string>	Control usage of hardware shaders on Intel HD graphics cards	AUTO_DETECT, FORCE_OFF, FORCE_ON	AUTO_DETECT
locale	<string></string>	Language and country locale to use (overrides system one)		<none></none>
maximise		Maximise window when Program is started	TRUE, FALSE	FALSE
pdf_application	<string></string>	Location of PDF browser		<none></none>
pdf_application_linux	<string></string>	Location of PDF browser for linux (use if the same oa_pref file is used for windows and linux)		<none></none>
pdf_application_windows	<string></string>	Location of PDF browser for windows (use if the same oa_pref file is used for windows and linux)		<none></none>
placement	<string></string>	multi-screen display	LEFT, RIGHT, BOTTOM, TOP, LEFT_BOTTOM, LEFT_TOP, RIGHT_BOTTOM, RIGHT_TOP	<none></none>
start_in	<string></string>	Directory to start Program in		<none></none>
temp_file_expiry	Ŭ	Age in days after which a temporary filename can be reused, 0 = never	0 - 10000	31
show_license_warning	<logical></logical>	Display Window containing License System messages	TRUE, FALSE	TRUE
post_uses_primer	<logical></logical>	ADMIN/INSTALL pref which allows D3Plot, T/his to take an available Primer license	TRUE, FALSE	TRUE
save_window_positions	<logical></logical>	Save position of undocked windows between sessions	TRUE, FALSE	TRUE

The following control directories

Preference	Туре	L F	Valid arguments	Default
home_dir	<string></string>	"home" directory for user		<none></none>
install_dir	<string></string>	Directory Oasys Ltd software is installed in		<none></none>
manuals_dir	<string></string>	Directory user manuals are installed in		<none></none>
temp_dir	<string></string>	temporary directory for user		<none></none>
checkpoint_dir	<string></string>	Directory for checkpoint files, or "none" to suppress them altogether		<none></none>

The following control laser options

Preference	Туре	Description	Valid arguments	Default
laser_paper_size	<string></string>	Default paper size	US, A4	A4
laser_orientation	<string></string>	Default page orientation	Portrait, Landscape	Landscape
laser_top_margin	<real></real>	Top margin size in mm		10
laser_bottom_margin	<real></real>	Bottom margin size in mm		30
laser_left_margin	<real></real>	Left margin size in mm		20

laser_right_margin	<real></real>	Right margin size in mm	10

The following control menu and mouse attributes

Preference	Туре	Description	Valid arguments	Default
display_factor		Factor on display size (0.5 - 2.0, automatic if undefined)	0.5 - 2.0	1.2
display_brightness	<real></real>	Menu brightness (0.0-1.0)	0.0 - 1.0	1.0
display_saturation	<real></real>	Menu colour saturation (0.0-1.0)	0.0 - 1.0	1.0
button_gradation	<real></real>	Button shade gradation (0.0-1.0)	0.0 - 1.0	0.0
dv_sync_windows	<string></string>		ICON, ICON+CAPS, ICON+NUM, ICON+CAPS+NUM	ICON+CAPS
dv_left_shift	<string></string>	Dyn view action for shift + Left mouse	ROTATION_XYZ, ROTATION_XY, ROTATION_Z, ROTATION_SPHERE, FRANSLATION, ZOOM_UP_+VE, ZOOM_DOWN_+VE, UNUSED	ROTATION_XYZ
dv_middle_shift			ROTATION_XYZ, ROTATION_XY, ROTATION_Z, ROTATION_SPHERE, IRANSLATION, ZOOM_UP_+VE, ZOOM_DOWN_+VE, UNUSED	TRANSLATION
dv_right_shift		shift + Right mouse	ROTATION_XYZ, ROTATION_XY, ROTATION_Z, ROTATION_SPHERE, TRANSLATION, ZOOM_UP_+VE, ZOOM_DOWN_+VE, UNUSED	ZOOM_UP_+VE
dv_left_ctrl	<string></string>	Dyn view action for	ROTATION_XYZ, ROTATION_XY, ROTATION_Z, ROTATION_SPHERE, IRANSLATION, ZOOM_UP_+VE, ZOOM_DOWN_+VE, UNUSED	ROTATION_XYZ
dv_middle_ctrl		ctrl + Middle mouse	ROTATION_XYZ, ROTATION_XY, ROTATION_Z, ROTATION_SPHERE, FRANSLATION, ZOOM_UP_+VE, ZOOM_DOWN_+VE, UNUSED	TRANSLATION
dv_right_ctrl	<string></string>	Dyn view action for ctrl + Right mouse	ROTATION_XYZ, ROTATION_XY, ROTATION_Z, ROTATION_SPHERE, IRANSLATION, ZOOM_UP_+VE, ZOOM_DOWN_+VE, UNUSED	ZOOM_UP_+VE
dv_left_both		Dyn view action for	ROTATION_XYZ, ROTATION_XY, ROTATION_Z, ROTATION_SPHERE, IRANSLATION, ZOOM_UP_+VE, ZOOM_DOWN_+VE, UNUSED	ROTATION_XYZ
dv_middle_both	<string></string>	Dyn view action for shift+ctrl + Middle mouse	ROTATION_XYZ, ROTATION_XY, ROTATION_Z, ROTATION_SPHERE, IRANSLATION, ZOOM_UP_+VE, ZOOM_DOWN_+VE, UNUSED	TRANSLATION
dv_right_both		shift+ctrl + Right mouse	ROTATION_XYZ, ROTATION_XY, ROTATION_Z, ROTATION_SPHERE, IRANSLATION, ZOOM_UP_+VE, ZOOM_DOWN_+VE, UNUSED	ZOOM_UP_+VE
dv_shift_action		Dynamic viewing	CURRENT, WIREFRAME, FREE_EDGE, UNUSED	CURRENT
dv_ctrl_action		Dynamic viewing	CURRENT, WIREFRAME, FREE_EDGE, UNUSED	WIREFRAME
dv_both_action		Dynamic viewing	CURRENT, WIREFRAME, FREE_EDGE, UNUSED	FREE_EDGE
font_scaling	<logical></logical>	whether text in GUI buttons can be scaled down to fit	TRUE, FALSE	TRUE
font_silent		whether to write explanatory text if wanted fonts are not found	TRUE, FALSE	FALSE

font_size	<string></string>	Menu font size	SMALL, DEFAULT, LARGE	DEFAULT
font_type	<string></string>	Menu font typeface and strength	HELVETICA, HELVETICA-BOLD, TIMES, TIMES-BOLD, COURIER, COURIER-BOLD	HELVETICA
left_handed	<string></string>	Left handed switching of mouse and/or keyboard	NONE, MOUSE, KEYBOARD, ALL	NONE
zoom_factor	<real></real>	Zoom Factor for mouse wheel (0.01-1.0)	0.01 - 1.0	0.05
czoom_factor	<real></real>	Factor for right mouse dynamic zoom (0.01-0.2)	0.01 - 0.2	0.05
kzoom_factor	<real></real>	Factor for +/- keyboard short-cut keys	0.01 - 100.0	2.0
menu_dragging_mode	<string></string>	Mode used when moving menu panels with the mouse	WIREFRAME, OPAQUE	WIREFRAME
mouse_3d_rotation_factor	<real></real>	Factor applied to the speed of rotation when using a 3D mouse		1.0
mouse_3d_pan_factor			1.0	
mouse_3d_zoom_factor	<real></real>	Factor applied to the speed of zooming when using a 3D mouse		1.0
mouse_action_middle_buttor	<string></string>	Set the action for the middle mouse key during picking	APPLY, REJECT, DESELECT	REJECT
mouse_action_right_button	<string></string>	Set the action for the right mouse key during picking	APPLY, REJECT, DESELECT	REJECT

The following control treatment of recent files popups

Preference	Туре	F	Valid arguments	Default
recent_files_dropdown	<string></string>	Turn the recent files popup on or off	OFF, ON	ON
recent_files_max_but	<integer></integer>	Maximum number of buttons displayed in a recent files popup	1 - 50	10
recent_files_max_char	_	Maximum number of characters displayed on each recent files button	1 - 512	50

The following control treatment of unicode

Preference	Туре	Description	Valid arguments	Default
cjk_unix_font		Font to use for CJK text on unix machines		-misc-fixed-medium-r-normal-*-12-*-*-*-*-*
cjk_windows_font		Font to use for CJK text on windows machines		MS Gothic 12

file_encoding	<string>Character</string>	Latin-1, BIG5,	Latin-1
	encoding	EUC-CN, EUC-JP,	
	for script	EUC-KR, GB, GBK,	
	files	ISO-2022-CN,	
		ISO-2022-CN-EXT,	
		ISO-2022-JP,	
		ISO-2022-JP-2,	
		ISO-2022-KR,	
		JOHAB, Shift-JIS,	
		UTF-8, UTF-16BE,	
		UTF-16LE, UTF-16,	
		UTF-32BE,	
		UTF-32LE, UTF-32	

APPENDIX I - Windows File Associations

I.1 WINDOWS (PC's)


Under Windows on PC it is possible to set up file associations so that double clicking on files with the .thf, .xtf, .cur and .bdf extension opens them automatically in T/HIS.

All of these settings are optional: you should be aware that under the Windows operating system associating a filetype (via its extension) with an application is convenient, but can also be restricting and hard to undo.

I.1.1 To make .thf files open in T/HIS by double-clicking on them

If no application is currently associated with .thf files, a "double-click" won't work, and some non-specific, usually "windows", icon will be displayed with the file.

Right click on any .thf file, and select properties and then press the Change... tab next to Opens with: from the popup menu.

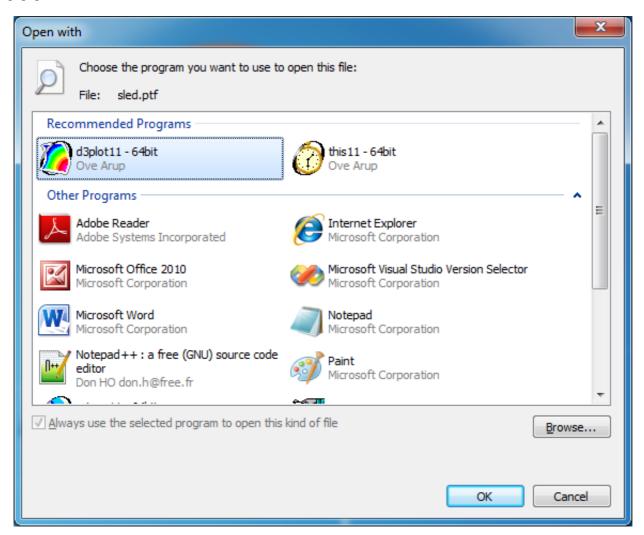

- 1. This will bring up the "**Open with**" panel.
- 2. Ensure the **Always use...** box is ticked
- 3. Use the directory browsing window to find the correct T/HIS executable. You are looking for file **this11.exe** or **this11_x64.exe**.
- 4. Select the executable and click on **OK** to close the "Open With" window.

T/HIS should now open and read in the selected file and you should now find that:

- All .thf files on your system show the T/HIS icon.
- Double-clicking on any such file starts T/HIS and opens that file.

It is not possible to set up the filename "d3thdt" for double-clicking in this way since Windows requires filename extensions when assigning applications to files.)

I.1.2 To make .xtf, .cur and .bdf files open in T/HIS by double-clicking on them

The procedure is exactly the same as for .thf files, and must be carried out for each of the file types that you wish to process by double-clicking:

.xtf LS-DYNA Extra Time History file

.cur T/HIS Curve file

.bdf T/HIS Bulk Data file

Note that: File types .thf and .xtf are opened in this way, but no contents are read in.

File types .cur and .bdf are opened and their complete contents read in.

APPENDIX J - T-HIS JavaScript API

Description of T/HIS API functions and methods.

The following pages describe the functions ("methods") available in the T/HIS Javascript interface. For information about how to run Javascript files see Section 5.23.

global class

The global class is the main JavaScript class. More...

Class functions

- AllocateFlag()
- ClearFlag(flag[Flag])
- DialogueInput(string_1, (string_2 ... string_n)[One or more Javascript strings])
 DialogueInputNoEcho(string_1, (string_2 ... string_n)[One or more Javascript strings])
- DisableUpdate()
- EnableUpdate()
- ErrorMessage(string[Any valid javascript type])
- Execute(data[object])
- Exit()
- GetCurrentDirectory()
- GetFtcfVar(name[string])
- GetInstallDirectory()
- GetPreferenceValue(program/string), name(string))
- GetStartInDirectory()
- Getenv(name[string])
- Message(string[Any valid javascript type])
- MilliSleep(time[integer])
- NumberToString(number[integer/real], width[integer])
- Print(string[Any valid javascript type])
- Println(string[Any valid javascript type])
- ReturnFlag(flag[Flag])
- SetCurrentDirectory(directory path[string])
- SetFtcfVar(name[string])
- Sleep(time[integer])
- System(string/Any valid javascript type])
- WarningMessage(string[Any valid javascript type])
- Windows()

Detailed Description

The global class declares the global object in JavaScript that contains the global properties and methods. As well as the core JavaScript methods, T/HIS also defines other additional ones. e.g. Message(), Print() etc. See the documentation below for more details.

Details of functions

AllocateFlag() [static]

Description

Allocate a flag for use in the script. See also ReturnFlag() and Once allocated the flag is automatically cleared for all entity types and all the curves currently in T/HIS.

Arguments

No arguments

Return type

Flag (integer)

Example

To allocate a flag

var flag = AllocateFlag();

ClearFlag(flag[Flag]) [static]

Description

Clears a flag on all curves and entity types.

Arguments

Name	Туре	Description
flag	Flag	The flag to return.

Return type

No return value.

Example

To clear flag f:

ClearFlag(f);

DialogueInput(string_1, (string_2 ... string_n)[One or more Javascript strings]) [static]

Description

Execute one or more lines of command line dialogue input.

Arguments

Name	Туре	Description
string_1, (string_2 string_n)		The command(s) that are to be executed as if they had been typed into the dialogue box

Return type

No return value

Example

To mulitple curves 1 and 2 by 10:

DialogueInputNoEcho("/op mul #1 10 #", "/op mul #2 10 #");

Note that each call to DialogueInput starts afresh at the top of the T/HIS command line "tree", so where multiple commands need to be given at sub-menu levels they need to be included in a single call.

DialogueInputNoEcho(string_1, (string_2 ... string_n)[One or more Javascript strings]) [static]

Description

Execute one or more lines of command line dialogue input with no echo of commands to dialogue box.

Arguments

Name	Туре	Description
string_1, (string_2 string_n)	One or more Javascript strings	The command(s) that are to be executed as if they had been typed into the dialogue box

Return type

No return value

Example

To mulitple curves 1 and 2 by 10:

DialogueInputNoEcho("/op mul #1 10 #", "/op mul #2 10 #");

As with DialogueInput above each call starts at the top of the T/HIS command tree structure, so any commands destined for sub-menus must all be arguments to a single call.

DisableUpdate() [static]

Description

Temporarily disable the plotting of curves within graphs.

Arguments

No arguments

Return type

No return value

Example

Temporarily disable the plotting of curves within graphs

DisableUpdate();

EnableUpdate() [static]

Description

Re-enable the plotting of curves within graphs.

Arguments

No arguments

Return type

No return value

Example

Re-enable the plotting of curves within graphs

EnableUpdate();

ErrorMessage(string[Any valid javascript type]) [static]

Description

Print an error message to the dialogue box adding a carriage return.

Arguments

Name	Type	Description
string	Any valid javascript type	The string/item that you want to print

Return type

No return value

Example

To print the title of model object m as an error to the dialogue box

```
ErrorMessage("The title is " + m.title);
```

Execute(data[object]) [static]

Description

Execute a program or script outside T/HIS and get the standard output and error streams.

Arguments

Name	Type	Description
data	-	Object containing the following properties; program (string): the program you want to run arguments (array): optional array of arguments to pass to program

Return type

object containing the following properties;

stdout: the standard output from the program/script

stderr: the standard error output from the program/script

status: the exit code from the program/script

Example

To run script "example.bat" with arguments "foo" and "bar":

```
var output = Execute( { program: 'example.bat', arguments: [ 'foo', 'bar' ] } );
var text = output.stdout;
var errors = output.stderr;
var ecode = output.status;
```

Exit() [static]

Description

Exit script

Arguments

No arguments

Return type

No return value

Example

Exit with

Exit();

GetCurrentDirectory() [static]

Description

Get the current working directory

Arguments

No arguments

Return type

String containing current working directory

Example

To get the current directory:

```
var cwd = GetCurrentDirectory();
```

GetFtcfVar(name[string]) [static]

Description

Get the value of a FAST-TCF variable

Arguments

Name	Type	Description
name	string	The FAST-TCF variable name (case independent)

Return type

String containing variable value or null if variable does not exist

Example

To get the value for FAST-TCF variable Job

```
var job name = GetFtcfVar("Job");
```

GetInstallDirectory() [static]

Description

Get the directory in which executables are installed. This is the OA_INSTALL environment variable, or if that is not set the directory in which the current executable is installed. Returns NULL if not found

Arguments

No arguments

Return type

string

Example

To get the install directory:

```
var install dir = GetInstallDirectory();
```

GetPreferenceValue(program[string], name[string]) [static]

Description

Get the Preference value with the given string in the any of admin ("OA_ADMIN") or install ("OA_INSTALL") or home ("OA_HOME") directory oa_pref

Arguments

Name	Type	Description	
program	string	The program name string: Valid values are 'All', 'D3Plot', 'Primer', 'Reporter', 'She' 'T/His'	11'
name	string	The preference name string	

Return type

: String containing preference value or null if preference string is not present in any oa_pref. Also if none of the above environment variables are not present, then API simply returns null. While returning preference value, locked preference value in admin and then install oa_pref takes precedence over home oa_pref. If preference is not locked in any of these oa_pref, preference in home directory oa_pref is returned.

Example

To get the preference value:

```
var pref_list = GetPreferenceValue('All', "font size");
```

GetStartInDirectory() [static]

Description

Get the directory passed to T/HIS by the -start_in command line argument

Arguments

No arguments

Return type

String containing start_in directory or NULL if not set

Example

To get the start_in directory:

```
var start_in = GetStartInDirectory();
```

Getenv(name[string]) [static]

Description

Get the value of an environment variable

Arguments

	Name	Type	Description
I	name	string	The environment variable name

Return type

String containing variable value or null if variable does not exist

Example

To get the value for environment variable HOME

```
var home = Getenv("HOME");
```

Message(string[Any valid javascript type]) [static]

Description

Print a message to the dialogue box adding a carriage return.

Arguments

Name Type Description		Description
string	javascript	The string/item that you want to print. If '\r' is added to the end of the string then instead of automatically adding a carriage return in the dialogue box, the next message will overwrite the current one. This may be useful for giving feedback to the dialogue box when doing an operation.

Return type

No return value

Example

To print the title of model object m as a message to the dialogue box

Message("The title is " + m.title);

MilliSleep(time[integer]) [static]

Description

Pause execution of the script for *time* milliseconds. See also Sleep()

Arguments

Name	Type	Description
time	integer	Number of milliseconds to pause for

Return type

No return value

Example

To pause for 500 milliseconds

MilliSleep(500);

NumberToString(number[integer/real], width[integer]) [static]

Description

Formats a number to a string with the specified width.

Arguments

Name Type Description		Description
number integer/real The		The number you want to format.
width	integer	The width of the string you want to format it to (must be less than 80).

Return type

String containing the number

Example

To write the number 1.2345e+6 to a string 10 characters wide

var str = NumberToString(1.2345e+6, 10);

Plot() [static]

Description

Updates all the T/HIS graphs.

Arguments

No arguments

Return type

No return value

Example

Update all graphs

Plot();

Print(string[Any valid javascript type]) [static]

Description

Print a string to stdout. Note that a carriage return is not added.

Arguments

Name	Туре	Description	
string	Any valid javascript type	The string/item that you want to print	

Return type

No return value

Example

```
To print string "Hello, world!"

Print("Hello, world!");

To print the title of model object m with a carriage return

print("The title is " + m.title + "\n");
```

Println(string[Any valid javascript type]) [static]

Description

Print a string to stdout adding a carriage return.

Arguments

Name	Туре	Description	
string	Any valid javascript type	The string/item that you want to print	

Return type

No return value

Example

```
To print string "Hello, world!" automatically adding a carriage return

Println("Hello, world!");

To print the title of model object m, automatically adding a carriage return

Println("The title is " + m.title);
```

ReturnFlag(flag[Flag]) [static]

Description

Return a flag used in the script. See also AllocateFlag() and

Arguments

Name	Type	Description
flag	Flag	The flag to return.

Return type

No return value.

Example

To return flag f:

ReturnFlag(f);

SetCurrentDirectory(directory path[string]) [static]

Description

Sets the current working directory.

Arguments

Name	Type	Description
directory path	string	Path to the directory you would like to change into.

Return type

true if successful, false if not

Example

To change into the directory "/data/test" exists

SetCurrentDirectory("/data/test")

SetFtcfVar(name[string]) [static]

Description

Set the value of a FAST-TCF variable. If the variable already exists then it's value is updated

Arguments

Name	Type	Description	
name	string	The FAST-TCF variable name (case independent)	

Return type

String containing variable value or null if variable does not exist

Example

To create a new FAST-TCF variable called run_number with the value "10"

var home = SetFtcfVar("run_number","10");

Sleep(time[integer]) [static]

Description

Pause execution of the script for time seconds. See also MilliSleep()

Arguments

Name	Type	Description
time	integer	Number of seconds to pause for

Return type

No return value

Example

To pause for 2 seconds

Sleep(2);

System(string[Any valid javascript type]) [static]

Description

Do a system command outside T/HIS. To run an external command and get the output then please use $\underline{\text{Execute}()}$ instead.

Arguments

Name	Туре	Description
string	Any valid javascript type	The system command that you want to do

Return type

integer (probably zero if command successful but is implementation-dependant)

Example

To make the directory "example"

System("mkdir example");

Unix() [static]

Description

Test whether script is running on a Unix/Linux operating system. See also Windows()

Arguments

No arguments

Return type

true if Unix/Linux, false if not

Example

To test if the OS is Unix

if (Unix())

WarningMessage(string[Any valid javascript type]) [static]

Description

Print a warning message to the dialogue box adding a carriage return.

Arguments

Name	Туре	Description
string	Any valid javascript type	The string/item that you want to print

Return type

No return value

Example

To print the title of model object m as a warning to the dialogue box

```
WarningMessage("The title is " + m.title);
```

Windows() [static]

Description

Test whether script is running on a Windows operating system. See also <u>Unix()</u>

Arguments

No arguments

Return type

true if Windows, false if not

Example

To test if the OS is Windows

```
if ( Windows() )
```

Colour class

The Colour class contains constants relating to colours. More...

Class functions

• <u>RGB</u>(red[integer], green[integer], blue[integer])

Colour constants

Name	Description
Colour.BACKGROUND	Background colour
Colour.BLACK	Colour black
Colour.BLUE	Colour blue
Colour.CYAN	Colour cyan
Colour.DARK_GREEN	Colour dark green
Colour.DARK_GREY	Colour dark grey
Colour.DARK_MAGENTA	Colour dark magenta
Colour.FOREGROUND	Foreground colour
Colour.GOLD	Colour gold
Colour.GREEN	Colour green
Colour.HOT_PINK	Colour hot pink
Colour.INDIGO	Colour indigo
Colour.LIGHT_GREY	Colour light grey
Colour.LIGHT_PINK	Colour light pink
Colour.LIME	Colour lime
Colour.MAGENTA	Colour magenta
Colour.MAROON	Colour maroon
Colour.MEDIUM_BLUE	Colour medium blue
Colour.MEDIUM_GREEN	Colour medium green
Colour.MEDIUM_GREY	Colour medium grey
Colour.NAVY	Colour navy
Colour.OLIVE	Colour olive
Colour.ORANGE	Colour orange
Colour.PALE_YELLOW	Colourpale yellow
Colour.PINK	Colour pink
Colour.PURPLE	Colour purple
Colour.RED	Colour red
Colour.SEA_GREEN	Colour sea green
Colour.SKY	Colour sky
Colour.TURQUOISE	Colour turquoise
Colour.USER_1	Colour user defined 1
Colour.USER_2	Colour user defined 2
Colour.USER_3	Colour user defined 3

Colour.USER_4	Colour user defined 4
Colour.USER_5	Colour user defined 5
Colour.USER_6	Colour user defined 6
Colour.WHITE	Colour white
Colour.YELLOW	Colour yellow

Detailed Description

The Colour class is used to define colours:

p.colour = Colour.RED;

Details of functions

RGB(red[integer], green[integer], blue[integer]) [static]

Description

Creates a colour from red, green and blue components. Can only be used to colour JavaScript widgets.

Arguments

Name	Type	Description
red	integer	red component of colour (0-255).
green	integer	green component of colour (0-255).
blue	integer	blue component of colour (0-255).

Return type

colour value (integer)

Component class

The following component constants can be used in GetDataFlagged() in T/HIS.

Component constants

Constants for MODEL

Name	Description	
Component.GSTP	Time step	
Component.GKE	Kinetic energy	
Component.GIE	Internal energy	
Component.GSWE	Stonewall energy	
Component.GSPE	Spring and damper energy	
Component.GHG	Hourglass energy	
Component.GSDE	System damping energy	
Component.GJE	Joint internal energy	
Component.GSIE	Sliding interface energy	
Component.GEW	External work	
Component.GRBE	Rigid Body stopper energy	
Component.GTE	Total energy	
Component.GTER	Total/initial energy	
Component.GVX	Average X velocity	
Component.GVY	Average Y velocity	
Component.GVZ	Average Z velocity	
Component.GTZC	Time per zone cycle	
Component.GMASS	Total mass	
Component.GMADD	Added mass	
Component.GPM	%age Mass increase	
Component.GEKE	Eroded Kinetic energy	
Component.GEIE	Eroded Internal energy	
Component.GEHG	Eroded Hourglass energy	
Component.GER	Energy Ratio w/o Eroded	
Component.DRCE	Current Distortional KE	
Component.DRMX	Maximum Distortional KE	
Component.DRCO	Convergence Factor	
Component.DRKE	Total Kinetic energy	
Component.LKE	Lumped Kinetic energy	

Constants for PART

Name	Description
Component.GKE	Kinetic energy

Component.GIE	Internal energy
Component.GHG	Hourglass energy
Component.GTE	Total energy
Component.GMX	X momentum
Component.GMY	Y momentum
Component.GMZ	Z momentum
Component.GVX	Average X velocity
Component.GVY	Average Y velocity
Component.GVZ	Average Z velocity
Component.GMASS	Mass
Component.GAM	Added mass
Component.GEKE	Eroded Kinetic energy
Component.GEIE	Eroded Internal energy

Constants for NODE

Name	Description
Component.TEMP	Temperature
Component.DX	X Displacement
Component.DY	Y Displacement
Component.DZ	Z Displacement
Component.DM	Displacement Magnitude
Component.VX	X Velocity
Component.VY	Y Velocity
Component.VZ	Z Velocity
Component.VM	Velocity Magnitude
Component.AX	X Acceleration
Component.AY	Y Acceleration
Component.AZ	Z Acceleration
Component.AM	Acceleration Magnitude
Component.CX	X co-ordinate
Component.CY	Y co-ordinate
Component.CZ	Z co-ordinate
Component.CV	Current Vector
Component.BX	Basic X co-ordinate
Component.BY	Basic Y co-ordinate
Component.BZ	Basic Z co-ordinate
Component.BV	Basic Vector
Component.RDX	X rotation
Component.RDY	Y rotation

Component.RDZ	Z rotation
Component.RDM	Rotation Magnitude
Component.RVX	X rotational velocity
Component.RVY	Y rotational velocity
Component.RVZ	Z rotational velocity
Component.RVM	Rotation Vel Magnitude
Component.RAX	X rotational acceleration
Component.RAY	Y rotational acceleration
Component.RAZ	Z rotational acceleration
Component.RAM	Rotation Accel Magnitude
Component.TFX	X Thermal Flux
Component.TFY	Y Thermal Flux
Component.TFZ	Z Thermal Flux
Component.TFM	Thermal Flux Magnitude
Component.TTOP	Top Temperature
Component.TBOT	Bottom Temperature

Constants for SOLID

Name	Description
Component.SXX	Stress in XX
Component.SYY	Stress in YY
Component.SZZ	Stress in ZZ
Component.SXY	Stress in XY
Component.SYZ	Stress in YZ
Component.SZX	Stress in ZX
Component.SMAX	MAX principal stress
Component.SMIN	MIN principal stress
Component.SMS	MAX shear stress
Component.SVON	von Mises stress
Component.SAV	Average stress (Pressure)
Component.STR	Triaxiality Factor
Component.EPL	Effective plastic strain
Component.EXX	Strain in XX
Component.EYY	Strain in YY
Component.EZZ	Strain in ZZ
Component.EXY	Strain in XY
Component.EYZ	Strain in YZ
Component.EZX	Strain in ZX
Component.EMAX	MAX principal strain

Component.EMIN	MIN principal strain
Component.EMS	MAX shear strain
Component.EVON	von Mises strain
Component.EAV	Average strain
Component.PEMAG	Plastic Strain Magnitude
Component.SOX	Extra data

Constants for BEAM

N T	D
Name	Description
Component.BFX	Axial force
Component.BFY	Shear force in Y
Component.BFZ	Shear force in Z
Component.BMXX	Torsional moment
Component.BMYY	Moment in Y
Component.BMZZ	Moment in Z
Component.BSAX	Axial strain
Component.BPE1	Bending energy: end 1
Component.BPE2	Bending energy: end 2
Component.BRY1	Y rotation: end 1
Component.BRY2	Y rotation: end 2
Component.BRZ1	Z rotation: end 1
Component.BRZ2	Z rotation: end 2
Component.BRXX	Torsional rotation
Component.BMY1	Y Bending moment: end 1
Component.BMY2	Y Bending moment: end 2
Component.BMZ1	Z Bending moment: end 1
Component.BMZ2	Z Bending moment: end 2
Component.BACE	Axial collapse energy
Component.BIE	Internal energy
Component.BSXX	Axial stress
Component.BSXY	XY Shear stress
Component.BSZX	ZX Shear stress
Component.BEP	Effective plastic strain
Component.BEAX	Axial strain
Component.BDX	Axial displacement
Component.BDY	Displacement in Y
Component.BDZ	Displacement in Z
Component.BRY	Rotation in Y
Component.BRZ	Rotation in Z

Component.BEX	Extra data
---------------	------------

Constants for SHELL

Name	Description
Component.SXX	Stress in XX
Component.SYY	Stress in YY
Component.SZZ	Stress in ZZ
Component.SXY	Stress in XY
Component.SYZ	Stress in YZ
Component.SZX	Stress in ZX
Component.SMAX	MAX principal stress
Component.SMIN	MIN principal stress
Component.SMS	MAX shear stress
Component.SVON	von Mises stress
Component.SAV	Average stress (Pressure)
Component.STR	Triaxiality Factor
Component.EPS	Effective plastic strain
Component.EXX	Strain in XX
Component.EYY	Strain in YY
Component.EZZ	Strain in ZZ
Component.EXY	Strain in XY
Component.EYZ	Strain in YZ
Component.EZX	Strain in ZX
Component.EMAX	MAX principal strain
Component.EMIN	MIN principal strain
Component.EMS	MAX shear strain
Component.EVON	von Mises strain
Component.EAV	Average strain
Component.PEMAG	Plastic Strain Magnitude
Component.RMX	Moment in X
Component.RMY	Moment in Y
Component.RMXY	Moment in XY
Component.RQX	Shear force in X
Component.RQY	Shear force in Y
Component.RFX	Normal force in X
Component.RFY	Normal force in Y
Component.RFXY	Normal force in XY
Component.THK	Thickness
Component.EDEN	Internal energy density

Component.SHX	Extra data
---------------	------------

Constants for THICK_SHELL

Name	Description
Component.SXX	Stress in XX
Component.SYY	Stress in YY
Component.SZZ	Stress in ZZ
Component.SXY	Stress in XY
Component.SYZ	Stress in YZ
Component.SZX	Stress in ZX
Component.SMAX	MAX principal stress
Component.SMIN	MIN principal stress
Component.SMS	MAX shear stress
Component.SVON	von Mises stress
Component.SAV	Average stress (Pressure)
Component.STR	Triaxiality Factor
Component.EPL	Effective plastic strain
Component.EXX	Strain in XX
Component.EYY	Strain in YY
Component.EZZ	Strain in ZZ
Component.EXY	Strain in XY
Component.EYZ	Strain in YZ
Component.EZX	Strain in ZX
Component.EMAX	MAX principal strain
Component.EMIN	MIN principal strain
Component.EMS	MAX shear strain
Component.EVON	von Mises strain
Component.EAV	Average strain
Component.PEMAG	Plastic Strain Magnitude
Component.SHX	Extra data

Constants for RIGIDWALL

Name	Description
Component.FN	Normal force
Component.FX	Global X force
Component.FY	Global Y force
Component.FZ	Global Z force
Component.EN	Energy

Constants for SPRING

Name	Description
Component.SP_F	Resultant Force
Component.SP_E	Elongation
Component.SP_FE	Res Force v Elongation
Component.SP_FX	Global X force
Component.SP_FY	Global Y force
Component.SP_FZ	Global Z force
Component.SP_EN	Energy
Component.SP_M	Resultant Moment
Component.SP_R	Rotation
Component.SP_MR	Res Moment v Rotation
Component.SP_MX	Moment in X
Component.SP_MY	Moment in Y
Component.SP_MZ	Moment in Z

Constants for SEATBELT

Name	Description
Component.SB_F	Force
Component.SB_S	Strain
Component.SB_FS	Force v Strain
Component.SB_L	Current Length

Constants for RETRACTOR

Name	Description
Component.RT_F	Force
Component.RT_P	Pullout
Component.RT_FP	Force v Pullout

Constants for SLIPRING

Name	Description
Component.SR_P	Pull through

Constants for PRETENSIONER

Name	Description
Component.PR_FI	'Fired' (= 1)

Constants for CONTACT

Name	Description
Component.CFX	Master X force

Master Y force
Master Z force
Master Force Mag
Slave X force
Slave Y force
Slave Z force
Slave Force Mag
Master X moment
Master Y moment
Master Z moment
Slave X moment
Slave Y moment
Slave Z moment
Master Mass
Slave Mass
Slave side energy
Master side energy
Frictional energy
Total energy

Constants for NODE_GROUP

Name	Description
Component.RFX	X force
Component.RFY	Y force
Component.RFZ	Z force
Component.RFM	Force Magnitude
Component.EN	Energy
Component.LFX	Local X force
Component.LFY	Local Y force
Component.LFZ	Local Z force
Component.GRFX	X force
Component.GRFY	Y force
Component.GRFZ	Z force
Component.GRFM	Force Magnitude
Component.GEN	Energy

Constants for AIRBAG

Name	Description
Component.PR	Pressure

Component.VOL Component.DE Component.IE Internal energy Component.IN Mass flow rate in Component.OU Mass flow rate out Component.MASS Total mass Component.TEMP Gas temperature Component.TE Component.TE Component.TE Inflator Energy Component.DMP Component.PP Ave Particle Pressure Component.MAS Component.MAS Total area Component.MAF Mass flow rate via fabric Component.MAV Mass flow rate via vent Component.PR -ve Pressure Component.PR Component.HCE Heat Convection Energy Component.LE Leak Energy Component.UN Unblocked Area Component.UN Unblocked Area Component.BA Blocked Area Component.TRE Translational Energy Component.TRE Component.TRE Translational Energy Component.TRE Component.		
Component.IE Internal energy Component.IN Mass flow rate in Component.OU Mass flow rate out Component.AASS Total mass Component.SA Surface area Component.TEMP Gas temperature Component.TEMP Gas temperature Component.TKE Translational KE Component.IFE Inflator Energy Component.DMP Damping Energy Component.MAF Mass flow rate via fabric Component.MAF Mass flow rate via vent Component.AR Total area Component.PRP +ve Pressure Component.PRN -ve Pressure Component.HCE Heat Convection Energy Component.EV Enhanced Vent Flag Component.EV Enhanced Vent Flag Component.UN Unblocked Area Component.BA Blocked Area Component.LK Leakage Component.TRE Translational Energy Component.TRE Translational Energy Component.TRE Translational Energy Component.Y Y co-ordinate Component.Y Y co-ordinate Component.VX X Velocity Component.VY Velocity Component.VZ Z Velocity Component.VY Velocity Component.VY Velocity Magnitude	Component.VOL	Volume
Component.IN Mass flow rate in Component.OU Mass flow rate out Component.MASS Total mass Component.SA Surface area Component.TEMP Gas temperature Component.TEMP Gas temperature Component.TKE Translational KE Component.IFE Inflator Energy Component.DMP Damping Energy Component.PP Ave Particle Pressure Component.MAF Mass flow rate via fabric Component.MAV Mass flow rate via vent Component.PRP +ve Pressure Component.PRP -ve Pressure Component.HCE Heat Convection Energy Component.EV Enhanced Vent Flag Component.UN Unblocked Area Component.UN Unblocked Area Component.BA Blocked Area Component.TRE Translational Energy Component.TRE Translational Energy Component.NP Num Particles Component.Y Y co-ordinate Component.Y Y co-ordinate Component.VY X Velocity Component.VY Component.VY Velocity Component.VY Z Velocity Component.VY Velocity Magnitude	Component.DE	Density
Component.OU Mass flow rate out Component.MASS Total mass Component.SA Surface area Component.TEMP Gas temperature Component.FR Reaction force Component.IFE Inflator Energy Component.DMP Damping Energy Component.MAF Mass flow rate via fabric Component.MAF Mass flow rate via vent Component.MAV Mass flow rate via vent Component.PRP +ve Pressure Component.PRP -ve Pressure Component.HCE Heat Convection Energy Component.EV Enhanced Vent Flag Component.LE Leak Energy Component.UN Unblocked Area Component.UN Unblocked Area Component.LK Leakage Component.TRE Translational Energy Component.TRE Translational Energy Component.NP Num Particles Component.Y Y co-ordinate Component.Y Y co-ordinate Component.VX X Velocity Component.VY Z Velocity Component.VY Z Velocity Component.VY Component.VY Z Velocity Component.VY Velocity Magnitude	Component.IE	Internal energy
Component.MASS Surface area Component.TEMP Gas temperature Component.TEMP Reaction force Component.TKE Translational KE Component.DMP Damping Energy Component.DMP Damping Energy Component.MAF Mass flow rate via fabric Component.MAF Mass flow rate via fabric Component.MAF Total area Component.PRP +ve Pressure Component.PRN -ve Pressure Component.HCE Heat Convection Energy Component.EV Enhanced Vent Flag Component.DE Leak Energy Component.DE Translational Energy Component.TRE Translational Energy Component.NP Num Particles Component.X X co-ordinate Component.Y Y co-ordinate Component.Z Z co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VY Y Velocity Component.VM Velocity Magnitude	Component.IN	Mass flow rate in
Component.SA Surface area Component.TEMP Gas temperature Component.FR Reaction force Component.TKE Translational KE Component.DMP Damping Energy Component.DMP Damping Energy Component.MAF Mass flow rate via fabric Component.MAF Mass flow rate via vent Component.AR Total area Component.PRP +ve Pressure Component.PRN -ve Pressure Component.HCE Heat Convection Energy Component.EV Enhanced Vent Flag Component.PVO Por Volume Component.PVO Por Volume Component.BA Blocked Area Component.BA Blocked Area Component.TRE Translational Energy Component.TRE Translational Energy Component.Y Y co-ordinate Component.Y Y co-ordinate Component.VX X Velocity Component.VY Z Velocity Component.VY Z Velocity Component.VY Component.VY Z Velocity Component.VY Velocity Magnitude	Component.OU	Mass flow rate out
Component.TEMP Gas temperature Component.FR Reaction force Component.TKE Translational KE Component.IFE Inflator Energy Component.DMP Damping Energy Component.PP Ave Particle Pressure Component.MAF Mass flow rate via fabric Component.MAV Mass flow rate via vent Component.AR Total area Component.PRP +ve Pressure Component.PRN -ve Pressure Component.HCE Heat Convection Energy Component.EV Enhanced Vent Flag Component.LE Leak Energy Component.PVO Por Volume Component.UN Unblocked Area Component.BA Blocked Area Component.TRE Translational Energy Component.TRE Translational Energy Component.X X co-ordinate Component.Y Y co-ordinate Component.Z Z co-ordinate Component.VX X Velocity Component.VY Velocity Component.VZ Z Velocity Component.VM Velocity Magnitude	Component.MASS	Total mass
Component.FR Reaction force Component.TKE Translational KE Component.IFE Inflator Energy Component.DMP Damping Energy Component.PP Ave Particle Pressure Component.MAF Mass flow rate via fabric Component.MAV Mass flow rate via vent Component.AR Total area Component.PRP +ve Pressure Component.PRN -ve Pressure Component.HCE Heat Convection Energy Component.EV Enhanced Vent Flag Component.LE Leak Energy Component.PVO Por Volume Component.UN Unblocked Area Component.BA Blocked Area Component.LK Leakage Component.TRE Translational Energy Component.NP Num Particles Component.X X co-ordinate Component.Y Y co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VY Z Velocity Component.VY Component.VM Velocity Magnitude	Component.SA	Surface area
Component.TKE Translational KE Component.IFE Inflator Energy Component.DMP Damping Energy Component.PP Ave Particle Pressure Component.MAF Mass flow rate via fabric Component.MAV Mass flow rate via vent Component.AR Total area Component.PRP +ve Pressure Component.PRN -ve Pressure Component.HCE Heat Convection Energy Component.EV Enhanced Vent Flag Component.LE Leak Energy Component.PVO Por Volume Component.UN Unblocked Area Component.BA Blocked Area Component.TRE Translational Energy Component.NP Num Particles Component.X X co-ordinate Component.Y Y co-ordinate Component.Z Z co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VY Z Velocity Component.VM Velocity Magnitude	Component.TEMP	Gas temperature
Component.IFE Inflator Energy Component.DMP Damping Energy Component.PP Ave Particle Pressure Component.MAF Mass flow rate via fabric Component.MAV Mass flow rate via vent Component.AR Total area Component.PRP +ve Pressure Component.PRN -ve Pressure Component.HCE Heat Convection Energy Component.EV Enhanced Vent Flag Component.LE Leak Energy Component.UN Unblocked Area Component.BA Blocked Area Component.BA Blocked Area Component.TRE Translational Energy Component.NP Num Particles Component.Y X co-ordinate Component.Y Y co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VY Z Velocity Component.VY Component.VX Z Velocity Component.VX Velocity Magnitude	Component.FR	Reaction force
Component.DMP Damping Energy Component.PP Ave Particle Pressure Component.MAF Mass flow rate via fabric Component.MAV Mass flow rate via vent Component.AR Total area Component.PRP +ve Pressure Component.PRN -ve Pressure Component.HCE Heat Convection Energy Component.EV Enhanced Vent Flag Component.LE Leak Energy Component.PVO Por Volume Component.UN Unblocked Area Component.BA Blocked Area Component.LK Leakage Component.TRE Translational Energy Component.NP Num Particles Component.X X co-ordinate Component.Y Y co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VZ Z Velocity Component.VM Velocity Magnitude	Component.TKE	Translational KE
Component.PP Ave Particle Pressure Component.MAF Mass flow rate via fabric Component.MAV Mass flow rate via vent Component.AR Total area Component.PRP +ve Pressure Component.PRN -ve Pressure Component.HCE Heat Convection Energy Component.EV Enhanced Vent Flag Component.LE Leak Energy Component.PVO Por Volume Component.UN Unblocked Area Component.BA Blocked Area Component.LK Leakage Component.TRE Translational Energy Component.NP Num Particles Component.X X co-ordinate Component.Y Y co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VZ Z Velocity Component.VM Velocity Magnitude	Component.IFE	Inflator Energy
Component.MAF Mass flow rate via fabric Component.MAV Mass flow rate via vent Component.AR Total area Component.PRP +ve Pressure Component.PRN -ve Pressure Component.HCE Heat Convection Energy Component.EV Enhanced Vent Flag Component.LE Leak Energy Component.PVO Por Volume Component.UN Unblocked Area Component.BA Blocked Area Component.TRE Translational Energy Component.NP Num Particles Component.X X co-ordinate Component.Y Y co-ordinate Component.Z Z co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VZ Z Velocity Component.VM Velocity Magnitude	Component.DMP	Damping Energy
Component.MAV Mass flow rate via vent Component.AR Total area Component.PRP +ve Pressure Component.PRN -ve Pressure Component.HCE Heat Convection Energy Component.EV Enhanced Vent Flag Component.PVO Por Volume Component.UN Unblocked Area Component.BA Blocked Area Component.TRE Translational Energy Component.NP Num Particles Component.X X co-ordinate Component.Y Y co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VZ Z Velocity Component.VM Velocity Magnitude	Component.PP	Ave Particle Pressure
Component.AR Component.PRP +ve Pressure Component.PRN -ve Pressure Component.HCE Heat Convection Energy Component.EV Enhanced Vent Flag Component.PVO Por Volume Component.UN Unblocked Area Component.BA Blocked Area Component.TRE Translational Energy Component.NP Num Particles Component.X Component.Y Component.Z Component.Y Component.VX X co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VZ Component.VZ Z Velocity Component.VM Velocity Magnitude	Component.MAF	Mass flow rate via fabric
Component.PRP +ve Pressure Component.PRN -ve Pressure Component.HCE Heat Convection Energy Component.EV Enhanced Vent Flag Component.PVO Por Volume Component.UN Unblocked Area Component.BA Blocked Area Component.LK Leakage Component.TRE Translational Energy Component.NP Num Particles Component.Y X co-ordinate Component.Z Z co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VZ Z Velocity Component.VM Velocity Magnitude	Component.MAV	Mass flow rate via vent
Component.PRN -ve Pressure Component.HCE Heat Convection Energy Component.EV Enhanced Vent Flag Component.PVO Por Volume Component.UN Unblocked Area Component.BA Blocked Area Component.LK Leakage Component.TRE Translational Energy Component.NP Num Particles Component.Y X co-ordinate Component.Z Z co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VZ Z Velocity Component.VM Velocity Magnitude	Component.AR	Total area
Component.HCE Heat Convection Energy Component.EV Enhanced Vent Flag Component.LE Leak Energy Component.PVO Por Volume Component.UN Unblocked Area Component.BA Blocked Area Component.LK Leakage Component.TRE Translational Energy Component.NP Num Particles Component.X X co-ordinate Component.Y Y co-ordinate Component.Z Z co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VZ Z Velocity Component.VX Velocity Magnitude	Component.PRP	+ve Pressure
Component.EV Enhanced Vent Flag Component.LE Leak Energy Component.PVO Por Volume Component.UN Unblocked Area Component.BA Blocked Area Component.LK Leakage Component.TRE Translational Energy Component.NP Num Particles Component.X X co-ordinate Component.Y Y co-ordinate Component.Z Z co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VZ Z Velocity Component.VX Velocity Magnitude	Component.PRN	-ve Pressure
Component.LE Leak Energy Component.PVO Por Volume Component.UN Unblocked Area Component.BA Blocked Area Component.LK Leakage Component.TRE Translational Energy Component.NP Num Particles Component.X X co-ordinate Component.Y Y co-ordinate Component.Z Z co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VZ Z Velocity Component.VZ Z Velocity Component.VX Velocity Magnitude	Component.HCE	Heat Convection Energy
Component.PVO Por Volume Component.UN Unblocked Area Component.BA Blocked Area Component.LK Leakage Component.TRE Translational Energy Component.NP Num Particles Component.X X co-ordinate Component.Y Y co-ordinate Component.Z Z co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VZ Z Velocity Component.VZ Z Velocity Component.VX Velocity Magnitude	Component.EV	Enhanced Vent Flag
Component.UN Component.BA Blocked Area Component.LK Leakage Component.TRE Translational Energy Component.NP Num Particles Component.X X co-ordinate Component.Y Component.Z Z co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VZ Z Velocity Component.VZ Velocity Component.VZ Velocity Component.VZ Velocity Component.VX Velocity Component.VZ Velocity Component.VZ Velocity Component.VZ Velocity Velocity Magnitude	Component.LE	Leak Energy
Component.BA Blocked Area Component.LK Leakage Component.TRE Translational Energy Component.NP Num Particles Component.X X co-ordinate Component.Y Y co-ordinate Component.Z Z co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VZ Z Velocity Component.VZ Delocity Component.VM Velocity Magnitude	Component.PVO	Por Volume
Component.LK Leakage Component.TRE Translational Energy Component.NP Num Particles Component.X X co-ordinate Component.Y Y co-ordinate Component.Z Z co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VZ Z Velocity Component.VZ Velocity Component.VZ Velocity Component.VM Velocity Magnitude	Component.UN	Unblocked Area
Component.TRE Translational Energy Component.NP Num Particles Component.X X co-ordinate Component.Y Y co-ordinate Component.Z Z co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VZ Z Velocity Component.VZ Velocity Component.VX Velocity Magnitude	Component.BA	Blocked Area
Component.NP Num Particles Component.X X co-ordinate Component.Y Y co-ordinate Component.Z Z co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VZ Z Velocity Component.VZ Velocity Component.VX Velocity Magnitude	Component.LK	Leakage
Component.X X co-ordinate Component.Y Y co-ordinate Component.Z Z co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VZ Z Velocity Component.VZ Welocity Magnitude	Component.TRE	Translational Energy
Component.Y Y co-ordinate Component.Z Z co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VZ Z Velocity Component.VZ Welocity Component.VM Velocity Magnitude	Component.NP	Num Particles
Component.Z Z co-ordinate Component.VX X Velocity Component.VY Y Velocity Component.VZ Z Velocity Component.VM Velocity Magnitude	Component.X	X co-ordinate
Component.VX X Velocity Component.VY Y Velocity Component.VZ Z Velocity Component.VM Velocity Magnitude	Component.Y	Y co-ordinate
Component.VY Y Velocity Component.VZ Z Velocity Component.VM Velocity Magnitude	Component.Z	Z co-ordinate
Component.VZ Z Velocity Component.VM Velocity Magnitude	Component.VX	X Velocity
Component.VM Velocity Magnitude	Component.VY	Y Velocity
	Component.VZ	Z Velocity
Component.GAS Gas Flow rate	Component.VM	Velocity Magnitude
	Component.GAS	Gas Flow rate

Constants for JOINT

Name	Description
Component.FX	X force

Component.FY	Y force
Component.FZ	Z force
Component.FM	Force Magnitude
Component.MX	Moment in X
Component.MY	Moment in Y
Component.MZ	Moment in Z
Component.MM	Moment Magnitude
Component.PHA	Phi angle
Component.PHDT	d(Phi)/dt
Component.PHS	Phi stiffness moment
Component.PHD	Phi damping moment
Component.PHT	Phi total moment
Component.THA	Theta angle
Component.THDT	d(Theta)/dt
Component.THS	Theta stiffness moment
Component.THD	Theta damping moment
Component.THT	Theta total moment
Component.PSA	Psi angle
Component.PSDT	d(Psi)/dt
Component.PSS	Psi stiffness moment
Component.PSD	Psi damping moment
Component.PST	Psi total moment
Component.EN	Total joint energy
Component.AA	Alpha angle
Component.ADT	d(Alpha)/dt
Component.ALS	Alpha stiffness moment
Component.ALD	Alpha damping moment
Component.ALT	Alpha total moment
Component.BA	Beta angle
Component.BDT	d(Beta)/dt
Component.BES	Beta stiffness moment
Component.BED	Beta damping moment
Component.BET	Beta total moment
Component.GA	Gamma angle
Component.GDT	d(Gamma)/dt
Component.GSF	Gamma scale factor
Component.DX	X displacement
Component.DXDT	d(X)/dt
Component.DY	Y displacement

	1
Component.DYDT	d(Y)/dt
Component.DZ	Z displacement
Component.DZDT	d(Z)/dt
Component.SFX	X stiffness force
Component.SFY	Y stiffness force
Component.SFZ	Z stiffness force
Component.DFX	X damping force
Component.DFY	Y damping force
Component.DFZ	Z damping force
Component.TFX	X total force
Component.TFY	Y total force
Component.TFZ	Z total force

Constants for X_SECTION

Name	Description
Component.XSEC_FX	X force
Component.XSEC_FY	Y force
Component.XSEC_FZ	Z force
Component.XSEC_FM	Force Magnitude
Component.XSEC_MX	Moment in X
Component.XSEC_MY	Moment in Y
Component.XSEC_MZ	Moment in Z
Component.XSEC_MM	Moment Magnitude
Component.XSEC_CX	X centroid coord
Component.XSEC_CY	Y centroid coord
Component.XSEC_CZ	Z centroid coord
Component.XSEC_A	Area of section

Constants for SUBSYSTEM

Name	Description
Component.GKE	Kinetic energy
Component.GIE	Internal energy
Component.GHG	Hourglass energy
Component.GKR	Kinetic Energy Ratio
Component.GIR	Internal Energy Ratio
Component.GMX	X momentum
Component.GMY	Y momentum
Component.GMZ	Z momentum

Constants for PART_GROUP

Name	Description
Component.GKE	Kinetic energy
Component.GIE	Internal energy
Component.GHG	Hourglass energy
Component.GTE	Total energy
Component.GMADD	Added mass

Constants for GEOMETERIC_CONTACT

Name	Description
Component.FX	X force
Component.FY	Y force
Component.FZ	Z force
Component.FM	Force Magnitude
Component.MX	Moment in X
Component.MY	Moment in Y
Component.MZ	Moment in Z
Component.MM	Moment Magnitude

Constants for NODAL_RB

Name	Description
Component.DX	X Displacement
Component.DY	Y Displacement
Component.DZ	Z Displacement
Component.DM	Displacement Magnitude
Component.VX	X Velocity
Component.VY	Y Velocity
Component.VZ	Z Velocity
Component.VM	Velocity Magnitude
Component.AX	X Acceleration
Component.AY	Y Acceleration
Component.AZ	Z Acceleration
Component.AM	Acceleration Magnitude
Component.CX	X co-ordinate
Component.CY	Y co-ordinate
Component.CZ	Z co-ordinate
Component.RDX	X rotation
Component.RDY	Y rotation
Component.RDZ	Z rotation
Component.RDM	Rotation Magnitude

Component.RVX	X rotational velocity
Component.RVY	Y rotational velocity
Component.RVZ	Z rotational velocity
Component.RVM	Rotation Vel Magnitude
Component.RAX	X rotational acceleration
Component.RAY	Y rotational acceleration
Component.RAZ	Z rotational acceleration
Component.RAM	Rotation Accel Magnitude
Component.D11	Direction Cosine 11
Component.D12	Direction Cosine 12
Component.D13	Direction Cosine 13
Component.D21	Direction Cosine 21
Component.D22	Direction Cosine 22
Component.D23	Direction Cosine 23
Component.D31	Direction Cosine 31
Component.D32	Direction Cosine 32
Component.D33	Direction Cosine 33
Component.LDX	Local X Displacement
Component.LDY	Local Y Displacement
Component.LDZ	Local Z Displacement
Component.LVX	Local X Velocity
Component.LVY	Local Y Velocity
Component.LVZ	Local Z Velocity
Component.LAX	Local X Acceleration
Component.LAY	Local Y Acceleration
Component.LAZ	Local Z Acceleration
Component.LRDX	Local X rotation
Component.LRDY	Local Y rotation
Component.LRDZ	Local Z rotation
Component.LRVX	Local X rotational vel
Component.LRVY	Local Y rotational vel
Component.LRVZ	Local Z rotational vel
Component.LRAX	Local X rotational accel
Component.LRAY	Local Y rotational accel
Component.LRAZ	Local Z rotational accel

Constants for WELD

Name	Description
Component.SW_F	Axial force

Component.SW_S	Shear force
Component.SW_FAIL	Failure
Component.SW_MF	Maximum Failure
Component.SW_LE	Length
Component.SW_TIME	Failure Time
Component.SW_MM	Moment Magnitude
Component.SW_TO	Torsion
Component.SW_FF	DC Failure Function
Component.SW_NF	Normal Failure
Component.SW_SF	Shear Failure
Component.SW_BF	Bending Failure
Component.SW_AREA	Spotweld Area

Constants for SPC

Name	Description
Component.SPC_FX	X Force
Component.SPC_FY	Y Force
Component.SPC_FZ	Z Force
Component.SPC_FM	Force Magnitude
Component.SPC_MX	Moment in X
Component.SPC_MY	Moment in Y
Component.SPC_MZ	Moment in Z
Component.SPC_MM	Moment Magnitude
Component.SPC_XTF	X Total Set Force
Component.SPC_YTF	Y Total Set Force
Component.SPC_ZTF	Z Total Set Force
Component.SPC_RF	Resultant Set Force
Component.SPC_XMF	X Total Model Force
Component.SPC_YMF	Y Total Model Force
Component.SPC_ZMF	Z Total Model Force
Component.SPC_RMF	Resultant Model Force

Constants for BOUNDARY

Name	Description
Component.FX	Applied X Force
Component.FY	Applied Y Force
Component.FZ	Applied Z Force
Component.FR	Applied Resultant force
Component.MX	Applied X Moment

Component.MY	Applied Y Moment
Component.MZ	Applied Z Moment
Component.MM	Applied Moment Magnitude
Component.EN	Energy from applied force

Constants for FSI

Name	Description
Component.PR	Pressure
Component.FX	X force
Component.FY	Y force
Component.FZ	Z force
Component.FM	Force Magnitude
Component.MP	Mass (Porous+Vent)
Component.ML	Mass (Leakage)
Component.LFX	Leakage X Force
Component.LFY	Leakage Y Force
Component.LFZ	Leakage Z Force
Component.LFM	Leakage Force Magnitude
Component.TEMP	Temperature
Component.TC	Temperature Change
Component.X	X co-ordinate
Component.Y	Y co-ordinate
Component.Z	Z co-ordinate
Component.SO	Cpld Solid ID

Constants for SPH

Name	Description
Component.DE	Density
Component.EXX	Strain in XX
Component.EYY	Strain in YY
Component.EZZ	Strain in ZZ
Component.EXY	Strain in XY
Component.EYZ	Strain in YZ
Component.EZX	Strain in ZX
Component.EFS	Effective Stress
Component.SXX	Stress in XX
Component.SYY	Stress in YY
Component.SZZ	Stress in ZZ
Component.SXY	Stress in XY

Stress in YZ
Stress in ZX
Smoothing Length
Temperature
Strain in XX
Strain in YY
Strain in ZZ
Strain in XY
Strain in YZ
Strain in ZX

Constants for TRACER

Name	Description
Component.CX	X co-ordinate
Component.CY	Y co-ordinate
Component.CZ	Z co-ordinate
Component.CV	Current Vector
Component.VX	X Velocity
Component.VY	Y Velocity
Component.VZ	Z Velocity
Component.VM	Velocity Magnitude
Component.SXX	Stress in XX
Component.SYY	Stress in YY
Component.SZZ	Stress in ZZ
Component.SXY	Stress in XY
Component.SYZ	Stress in YZ
Component.SZX	Stress in ZX
Component.EPL	Effective Plastic Strain
Component.DE	Density
Component.RV	Relative Volume
Component.AC	Active

Constants for PULLEY

Name	Description
Component.PL_FT	Force
Component.PL_SL	Slip
Component.PL_SR	Slip Rate
Component.PL_AN	Wrap Angle

Constants for ICFD

Name	Description
Component.FPX	X Pressure Drag
Component.FPY	Y Pressure Drag
Component.FPZ	Z Pressure Drag
Component.FPM	Pressure Drag Magnitude
Component.FVX	X Viscous Drag
Component.FVY	Y Viscous Drag
Component.FVZ	Z Viscous Drag
Component.FVM	Viscous Drag Magnitude
Component.MPX	MX Pressure Drag
Component.MPY	MY Pressure Drag
Component.MPZ	MZ Pressure Drag
Component.MPM	Pressure Drag Magnitude
Component.MVX	MX Viscous Drag
Component.MVY	MY Viscous Drag
Component.MVZ	MZ Viscous Drag
Component.MVM	Viscous Drag Magnitude
Component.CX	X co-ordinate
Component.CY	Y co-ordinate
Component.CZ	Z co-ordinate
Component.CV	Current Vector
Component.VX	X Velocity
Component.VY	Y Velocity
Component.VZ	Z Velocity
Component.VM	Velocity Magnitude
Component.AVX	X AVelocity
Component.AVY	Y AVelocity
Component.AVZ	Z AVelocity
Component.AVM	AVelocity Magnitude
Component.PR	Pressure
Component.PA	Average Pressure
Component.DE	Density
Component.VTX	X Vorticity
Component.VTY	Y Vorticity
Component.VTZ	Z Vorticity
Component.VTM	Vorticity Magnitude
Component.QC	Q Criterion
Component.VC	Viscosity
Component.VT	Viscous Turbulence

Component.LS	Level Set Function
Component.A	Alpha
Component.TEMP	Temperature
Component.TAA	Temp Area Average
Component.TSA	Temp Sum Average
Component.TEH	Average Heat Flux
Component.AR	Total Area
Component.HTC	Heat Transfer Coeff

Constants for CESE

Name	Description
Component.CX	X co-ordinate
Component.CY	Y co-ordinate
Component.CZ	Z co-ordinate
Component.CV	Current Vector
Component.VX	X Velocity
Component.VY	Y Velocity
Component.VZ	Z Velocity
Component.VM	Velocity Magnitude
Component.VTX	X Vorticity
Component.VTY	Y Vorticity
Component.VTZ	Z Vorticity
Component.VTM	Vorticity Magnitude
Component.DE	Density
Component.PR	Pressure
Component.TEMP	Temperature
Component.FPX	X Pressure Force
Component.FPY	Y Pressure Force
Component.FPZ	Z Pressure Force
Component.FPM	Pressure Force Magnitdue
Component.FVX	X Viscous Force
Component.FVY	Y Viscous Force
Component.FVZ	Z Viscous Force
Component.FVM	Viscous Force Magnitude
Component.AR	Total Area

Constants for EM

Name	Description
Component.CX	X co-ordinate

Component.CY	Y co-ordinate
Component.CZ	Z co-ordinate
Component.CV	Current Vector
Component.ECX	X Current
Component.ECY	Y Current
Component.ECZ	Z Current
Component.ECM	Current Magnitude
Component.BFDX	X BField
Component.BFDY	Y BField
Component.BFDZ	Z BField
Component.BFDM	BField Magnitude
Component.AFX	X AField
Component.AFY	Y AField
Component.AFZ	Z AField
Component.AFM	AField Magnitude
Component.S	Sigma
Component.MUR	Relative Permeability
Component.JHR	Joule Heating Rate
Component.LOFX	X Lorentz Force
Component.LOFY	Y Lorentz Force
Component.LOFZ	Z Lorentz Force
Component.LOFM	Lorentz Force Magnitude
Component.EFX	X EField
Component.EFY	Y EField
Component.EFZ	Z EField
Component.EFM	EField Magnitude

Constants for PBLAST

Name	Description
Component.AIE	Air Internal Energy
Component.DPIE	Detn Product IE
Component.OIE	Outside Domain IE
Component.ATE	Air Translational E
Component.DPTE	Detn Product Trans E
Component.OTE	Outside Domain Trans E
Component.APR	Air Pressure
Component.DPPR	Detn Product Pressure
Component.RPR	Resultant Pressure
Component.AR	Surface Area

F	
Component.AFX	Air X Force
Component.AFY	Air Y Force
Component.AFZ	Air Z Force
Component.DPFX	Detn Product X Force
Component.DPFY	Detn Product Y Force
Component.DPFZ	Detn Product Z Force
Component.RFX	Resultant X Force
Component.RFY	Resultant Y Force
Component.RFZ	Resultant Z Force

Constants for PRTUBE

Name	Description
Component.AR	Cross section area
Component.DE	Density
Component.PR	Pressure
Component.VEL	Velocity

Constants for BEARING

Name	Description	
Component.FX	X Force	
Component.FY	Y Force	
Component.FZ	Z Force	
Component.MX	X Moment	
Component.MY	Y Moment	
Component.MZ	Z Moment	
Component.DX	X Displacement	
Component.DY	Y Displacement	
Component.DZ	Z Displacement	
Component.AX	X Angle	
Component.AY	Y Angle	
Component.AZ	Z Angle	
Component.LFX	Local X Force	
Component.LFY	Local Y Force	
Component.LFZ	Local Z Force	
Component.LMX	Local X Moment	
Component.LMY	Local Y Moment	
Component.LMZ	Local Z Moment	
Component.LDX	Local X Displacement	
Component.LDY	Local Y Displacement	

Component.LDZ	Local Z Displacement
Component.LAX	Local X Angle
Component.LAY	Local Y Angle
Component.LAZ	Local Z Angle

Constants for CURVOUT

Name	Description	
Component.COUT	CURVOUT	

Curve class

The Curve class gives you access to curves in T/HIS. More...

Class functions

- AddFlaggedToGraph(flag[Flag], graph, graph...[int])
- Copy(source[integer], target[integer])
- DeleteFlagged(flag[Flag])
- Exists(curve[integer])
- First()
 FirstFreeID()
- FirstID()
 FlagAll(flag[integer])
- GetFromID(ID[integer])
- GetFromTag(TAG[string])
- HighestID()
- Pick(prompt[string], modal (optional)[boolean])
- RemoveFlaggedFromGraph(flag[Flag], graph, graph...[int])
- Select(flag[integer], prompt[string], modal (optional)[boolean])
- <u>UnflagAll</u>(flag[integer])

Member functions

- AddPoint(xvalue[real], yvalue[real])
- AddToGraph(graph, graph...[int])
- ClearFlag(flag[integer])
 DeletePoint(ipt[integer])
- Flagged(flag[integer])
- GetPoint(row[integer])
- InsertPoint(ipt[integer], xvalue[real], yvalue[real], position[integer])

- Next()
 Previous()
 RemoveFromGraph(graph, graph...[int])
- SetFlag(flag[integer])
- SetPoint(ipt[integer], xvalue[real], yvalue[real])
- Update()
- YatX(xvalue[real])

Curve constants

Name	Description
Curve.AFTER	Insertion of curve data option.
Curve.BEFORE	Insertion of curve data option.

Curve properties

Name	Type	Description
average	real	Curve average value (read only)
colour	Colour	The colour of the curve
directory	string	Directory the curve came from
entity_id	integer	The ID of the entity that the curve was generated from.
entity_type	Entity Type	The entity type that the curve was generated from
file	string	Filename the curve came from
hic	real	Curve HIC value - returns 0.0 if the HIC hasn't been calculated (read only)
hic_tmax	real	End of HIC time windows - returns 0.0 if the HIC hasn't been calculated (read only)
hic_tmin	real	Start of HIC time windows - returns 0.0 if the HIC hasn't been calculated (read only)
hicd	real	Curve HIC(d) value - returns 0.0 if the HIC(d) hasn't been calculated (read only)
hicd_tmax	real	End of HIC(d) time windows - returns 0.0 if the HIC(d) hasn't been calculated (read only)

hicd_tmin	real	Start of HIC(d) time windows - returns 0.0 if the HIC(d) hasn't been calculated (read only)	
id	integer	Curve ID (read only)	
is_null	integer	Returns 1 if the curve is NULL (read only)	
label	string	Curve label	
model	integer	The ID of the model that a curve was read from.	
npoints	integer	Number of curve points (read only)	
regr_rsq	real	Pearson's R^2 value for regression curve, returns 0.0 if the curve has not come from the regression operation. (read only)	
regr_sdgrad	real	Standard deviation of the linear regression gradient value, returns 0.0 if the curve has not come from linear regression. (read only)	
regr_sdicpt	real	Standard deviation of the linear regression intercept value, returns 0.0 if the curve has not come from linear regression. (read only)	
regr_sdyx	real	Standard deviation of the linear regression values $y = bx + c$, returns 0.0 if the curve has not come from linear regression. (read only)	
rms	real	Curve RMS value (read only)	
style	LineStyle	The line style used to draw the curve	
symbol	Symbol	The symbol style for a curve	
tag	string	Curve tag. If a FAST-TCF script is running then this is the FAST-TCF tag	
title	string	Curve title	
tms	real	3ms Clip value - returns 0.0 if the 3ms Clip value hasn't been calculated (read only)	
tms_tmax	real	End of 3ms clip time windows - returns 0.0 if the 3ms Clip hasn't been calculated (read only)	
tms_tmin	real	Start of 3ms clip time windows - returns 0.0 if the 3ms Clip hasn't been calculated (read only)	
unit_system	UnitSystem	The Curve unit system	
width	LineWidth	The line width used to draw the curve	
x_at_ymax	real	X axis value at the Y axis maximum (read only)	
x_at_ymin	real	X axis value at the Y axis minimum (read only)	
x_axis_label	string	Curve X axis label	
x_axis_unit	<u>Units</u>	The X axis unit	
xmax	real	X axis maximum value (read only)	
xmin	real	X axis minimum value (read only)	
y_axis_label	string	Curve Y axis label	
y_axis_unit	<u>Units</u>	The Y axis unit	
ymax	real	Y axis maximum value (read only)	
ymin	real	Y axis minimum value (read only)	

Detailed Description

The Curve class allows you to create, modify, edit and manipulate curves. See the documentation below for more details.

Constructor

new Curve(lcid[integer], tag (optional)[string], Line label (optional)[string], X-axis label (optional)[string], Y-axis label (optional)[string])

Description

Create a new <u>Curve</u> object. The curve will be added to all the currently active graphs.

Arguments

Name	Туре	Description
lcid	integer	<u>Curve</u> number
tag (optional)	string	Tag used to reference the curve in FAST-TCF scripts
Line label (optional)	string	Line label for the curve
X-axis label (optional)	string	X-axis label for the curve
Y-axis label (optional)	string	Y-axis label for the curve

Return type

Curve object

Example

To create a new curve with label 200

var 1 = new Curve(200);

Details of functions

AddFlaggedToGraph(flag[<u>Flag</u>], graph, graph...[int]) [static]

Description

Adds flagged curves to a graph.

Arguments

Name	Type	Description
flag	Flag	Flag to check on the curve
graph, graph	int	Optional list of graphs to remove the curve from, If undefined then the curve is removed from all graphs.

Return type

No return value.

Example

To remove curves flagged with flag f from graphs 1 and 3:

Curve.AddFlaggedToGraph(f,1,3);

To remove a curves flagged with flag from all graphs:

Curve.AddToGraph(f);

AddPoint(xvalue[real], yvalue[real])

Description

Adds a point at the end of the curve.

Arguments

Name	Type	Description
xvalue	real	The x value of the point.
yvalue	real	The y value of the point.

Return type

No return value.

Example

To add the point x=3.5, y=5.5 to curve 1:

1.AddPoint(3.5,5.5);

AddToGraph(graph, graph...[int])

Description

Adds a curve to a graph.

Arguments

Name	Type	Description	
graph, graph	int	Optional list of graphs to add the curve to, If undefined then the curve is added to all graphs.	

Return type

No return value.

Example

To add a curve (c) to graphs 1 and 3:

c.AddToGraph(1,3);

To add a curve (c) to all graphs:

c.AddToGraph();

ClearFlag(flag[integer])

Description

Clears a flag on the curve.

Arguments

Name	Type	Description
flag	integer	Flag to clear on the curve

Return type

No return value

Example

To clear flag f for curve l:

1.ClearFlag(f);

Copy(source[integer], target[integer]) [static]

Description

Copies a curve.

Arguments

Name	Type	Description
source	integer	ID of curve to copy from
target	integer	ID of curve to copy to

Return type

No return value

Example

To copy curve 1 to curve 4:

var curve = Curve.Copy(1,4);

To copy curve a to curve b,

Curve.Copy(a.id,b.id);

Delete(curve[integer]) [static]

Description

Deletes a curve

Arguments

Name	Type	Description
curve	integer	ID of curve to delete

Return type

No return value

Example

To delete curve n

Curve.Delete(n);

DeleteFlagged(flag[Flag]) [static]

Description

Deletes flagged curves

Arguments

Name	Type	Description
flag	Flag	Flag to check on the curve

Return type

No return value

Example

To delete curves flagged with flag f

Curve.DeleteFlagged(f);

DeletePoint(ipt[integer])

Description

Deletes a point in a curve. The input for the point number should start at 1 for the 1st point not zero.

Arguments

Name	Type	Description	
ipt	integer	The point you want to insert the data before or after.	

Return type

No return value.

Example

To delete the 3rd point in curve 1:

1.DeletePoint(3);

Exists(curve[integer]) [static]

Description

Checks if a curve exists

Arguments

Name	Type	Description
curve	integer	ID of curve to check

Return type

TRUE if the curve exists, otherwise FALSE

Example

To check if a curve n exists

var exists = Curve.Exists(n);

First() [static]

Description

Returns the first curve.

Arguments

No arguments

Return type

Curve object (or null if there are no more curves in the model).

Example

To get the 1st curve

var curve = Curve.First();

FirstFreeID() [static]

Description

Returns the ID of the first free curve.

Arguments

No arguments

Return type

ID of first unsued curve.

Example

To get the ID of the first free curve:

var curve = Curve.FirstFreeID();

FirstID() [static]

Description

Returns the ID of the first curve.

Arguments

No arguments

Return type

ID of the first curve defined.

Example

To get the 1st curve

var curve = Curve.FirstID();

FlagAll(flag[integer]) [static]

Description

Flags all of the curves with a defined flag

Arguments

Name	Type	Description
flag	integer	Flag to set on the curves

Return type

No return value

Example

To flag all of the curves with flag f:

Curve.FlagAll(f);

Flagged(flag[integer])

Description

Checks if the curve is flagged or not.

Name	Type	Description
flag	integer	Flag to check on the curve

Return type

true if flagged, false if not.

Example

To check if curve d has flag f set on it:

```
if (d.Flagged(f) ) do_something...
```

GetFromID(ID[integer]) [static]

Description

Returns the curve object for a curve ID.

Arguments

Name	Type	Description
ID	integer	ID of curve to return object for

Return type

Curve object (or null if the curve does not exist.

Example

To get the curve n

```
var curve = Curve.GetFromID(n);
```

GetFromTag(TAG[string]) [static]

Description

Finds a curve from it's Tag. This function is only available when running a Javascript from within a FAST-TCF script

Arguments

Name	Type	Description
TAG	string	TAG of curve to return object for

Return type

Curve object (or null if there are no free curves).

Example

To get the curve with a tag "tag"

```
var curve = Curve.GetFromTag(tag);
```

GetPoint(row[integer])

Description

Returns x and y data for a point in a curve. The input for the point number should start at 1 for the 1st point not zero. In the array returned array[0] contains the x axis value and array[1] contains the y-axis value.

Name	Type	Description
row	integer	The point you want the data for.

Return type

An array containing the x value and the y value.

Example

```
To get the curve data for the 3rd point for curve I:
   if (l.npoints >= 3)
{
      var point_data = l.GetPoint(3);
}
```

HighestID() [static]

Description

Returns the ID of the highest curve currently being used

Arguments

No arguments

Return type

ID of highest curve currently being used.

Example

To get the highest curve ID

```
var id= Curve.HighestID();
```

InsertPoint(ipt[integer], xvalue[real], yvalue[real], position[integer])

Description

Inserts a new point before or after the specified point.

Arguments

Name	Type	Description	
ipt	integer	ger The point you want to insert the data before or after.	
xvalue	real	eal The x value of the point.	
yvalue	real	The y value of the point.	
position integer Specify either before or after the selected pioint. Use 'Curve.BEFORE' for before, and 'Curve.AFTER' for after.		Specify either before or after the selected pioint. Use 'Curve.BEFORE' for before, and 'Curve.AFTER' for after.	

Return type

No return value.

Example

To insert the values after the 3rd row to x=3, y=5 for curve 1:

```
1.InsertPoint(3, 3, 5, Curve.AFTER);
```

Next()

Description

Returns the next curve in the model.

Arguments

No arguments

Return type

Curve object (or null if there are no more curves in the model).

Example

To get the curve in model m after curve 1:

```
var curve = 1.Next();
```

Pick(prompt[string], modal (optional)[boolean]) [static]

Description

Picks a single curve.

Arguments

Name	Type	Description	
prompt	string	ng Text to display as a prompt to the user	
modal (optional)	boolean If selection is modal (blocks the user from doing anything else in T/HIS until the dismissed). If omitted the selection will be modal.		

Return type

Curve object (or null if the user cancles the pick operation).

Example

To pick a curve, giving the prompt 'Pick curve':

```
var curve = Curve.Pick('Pick curves');
```

Previous()

Description

Returns the previous curve in the model.

Arguments

No arguments

Return type

Curve object (or null if there are no more curves in the model).

Example

To get the curve in model m before this one:

```
var curve = curve.Previous();
```

RemoveFlaggedFromGraph(flag[Flag], graph, graph,..[int]) [static]

Description

Removes flagged curves from a graph.

Name	Type	Description	
flag	Flag	Flag to check on the curve	
graph, graph		Optional list of graphs to remove the curve from, If undefined then the curve is removed from all graphs.	

Return type

No return value.

Example

To remove curves flagged with flag f from graphs 1 and 3:

Curve.RemoveFlaggedFromGraph(f,1,3);

To remove a curves flagged with flag from all graphs:

Curve.RemoveFromGraph(f);

RemoveFromGraph(graph, graph...[int])

Description

Removes a curve from a graph.

Arguments

Name	Type	Description
graph, graph	int	Optional list of graphs to remove the curve from, If undefined then the curve is removed from all graphs.

Return type

No return value.

Example

To remove a curve (c) from graphs 1 and 3:

c.RemoveFromGraph(1,3);

To remove a curve (c) from all graphs:

c.RemoveFromGraph();

Select(flag[integer], prompt[string], modal (optional)[boolean]) [static]

Description

Allows the user to select curves.

Arguments

Name	Type	Description	
flag	integer	Flag to use when selecting curves	
prompt	string	Text to display as a prompt to the user	
modal (optional)	boolean	If selection is modal (blocks the user from doing anything else in T/HIS until this window is dismissed). If omitted the selection will be modal.	

Return type

Number of items selected or null if menu cancelled

To select curves, flagging those selected which flag f, giving the prompt 'Select curves':

```
var num = Curve.Select(f, 'Select curves');
```

SetFlag(flag[integer])

Description

Sets a flag on the curve.

Arguments

Name	Type	Description
flag	integer	Flag to set on the curve

Return type

No return value

Example

To set flag f for curve 1:

1.SetFlag(f);

SetPoint(ipt[integer], xvalue[real], yvalue[real])

Description

Sets the x and y values for a specified point in a curve.

Arguments

Name	Type	Description
ipt	integer	The point to set the data for.
xvalue	real	The x value of the point.
yvalue	real	The y value of the point.

Return type

No return value.

Example

To set the values for the 3rd point to x=3, y=5 for curve 1:

1.SetPoint(3, 3, 5);

UnflagAll(flag[integer]) [static]

Description

Unsets a defined flag on all of the curves.

Arguments

Name	Type	Description
flag	integer	Flag to unset on the curves

Return type

No return value

Example

To unset the flag f on all of the curves:

Curve.UnflagAll(f);

Update()

Description

Updates a curve properties (min,max, average values etc).

Arguments

No arguments

Return type

No return value.

Example

To update the properties of curve 1:

1.Update();

YatX(xvalue[real])

Description

Returns the y value of the curve at a given x value, interpolating if requested x value lies between data points.

Arguments

Name	Type	Description
xvalue	real	The x value.

Return type

The y value.

Example

To get the y value of curve c when x=1.4:

var y = c.YatX(1.4);

Datum class

The Datum class gives you access to datums in T/HIS. More...

Class functions

- Delete(datum[string])
 Exists(datum[string])

- First()
 GetFromAcronym(datum[string])

Member functions

- AddToGraph(graph, graph...[int])
- Next()
 RemoveFromGraph(graph, graph...[int])

Datum constants

Name	Description
Datum.CONSTANT_X	Constant X type datum.
Datum.CONSTANT_Y	Constant Y type datum.
Datum.CONSTANT_Y2	Constant Y2 type datum.
Datum.FILL_ABOVE_BELOW	Fill datum above and below.
Datum.FILL_RIGHT_LEFT	Fill datum right and left.
Datum.LABEL_ABOVE_CENTRE	Label position above centre.
Datum.LABEL_ABOVE_LEFT	Label position above left.
Datum.LABEL_ABOVE_RIGHT	Label position above right.
Datum.LABEL_BELOW_CENTRE	Label position below centre.
Datum.LABEL_BELOW_LEFT	Label position below left.
Datum.LABEL_BELOW_RIGHT	Label position below right.
Datum.LABEL_BOTTOM_LEFT	Label position bottom left.
Datum.LABEL_BOTTOM_RIGHT	Label position bottom right.
Datum.LABEL_MIDDLE_LEFT	Label position middle left.
Datum.LABEL_MIDDLE_RIGHT	Label position middle right.
Datum.LABEL_NONE	No label.
Datum.LABEL_TOP_LEFT	Label position top left.
Datum.LABEL_TOP_RIGHT	Label position top right.
Datum.POINTS	Points type datum.

Datum properties

Name	Туре	Description
acronym	string	Datum acronym
fill_colour_above	Colour	The colour above the datum line
fill_colour_below	Colour	The colour below the datum line
fill_colour_left	Colour	The colour left of the datum line
fill_colour_right	Colour	The colour right of the datum line
fill_type	integer	The fill type. Can be <u>Datum.FILL_ABOVE_BELOW</u> , <u>Datum.FILL_RIGHT_LEFT</u> . Note that this can only be changed if the datum is of the type Datum.POINTS.

label_colour	string <u>Colour</u>	Datum label The colour of the datum label
label_position	integer	The label position. Can be Datum.LABEL_NONE Datum.LABEL_ABOVE_CENTRE, Datum.LABEL_ABOVE_LEFT, Datum.LABEL_ABOVE_RIGHT, Datum.LABEL_BELOW_CENTRE, Datum.LABEL_BELOW_LEFT, Datum.LABEL_BELOW_RIGHT, Datum.LABEL_MIDDLE_LEFT, Datum.LABEL_TOP_LEFT, Datum.LABEL_BOTTOM_LEFT, Datum.LABEL_MIDDLE_RIGHT, Datum.LABEL_TOP_RIGHT, Datum.LABEL_BOTTOM_RIGHT,
line_colour	Colour	The colour of the datum line
line_style	LineStyle	The line style used to draw the datum line
line_width LineWidth The line width used to draw the datum line		The line width used to draw the datum line

Detailed Description

The Datum class allows you to create and manipulate datums. See the documentation below for more details.

Constructor

new Datum(acronym[string], type[integer], value[real or array])

Description

Create a new Datum object. The datum will be added to all the currently active graphs.

Arguments

Name	Туре	Description	
acronym	string	<u>Datum</u> acronym	
type	integer	Specify type of datum line. Can be <u>Datum.CONSTANT_X</u> , <u>Datum.CONSTANT_Y</u> , <u>Datum.CONSTANT_Y2</u> , <u>Datum.POINTS</u>	
value	real or array	D YOU D DOWN THE STATE OF THE S	

Return type

Datum object

Example

```
To create a new datum with acronym my_datum and a constant Y value of 100
```

```
var d = new Datum("my_datum", Datum.CONSTANT_Y, 100);
```

To create a new datum with acronym my_datum and some X, Y points

```
var points = new Array(6);
points[0] = 0.0;
points[1] = 10.0;
points[2] = 1.0;
points[3] = 15.0;
points[4] = 2.0;
points[5] = 17.0;
var d = new Datum("my datum", Datum.POINTS, points);
```

Details of functions

AddToGraph(graph, graph...[int])

Description

Adds a datum to a graph.

Name	Type	Description	
graph, graph	int	Optional list of graphs to add the datum to, If undefined then the datum is added to all graphs.	

Return type

No return value.

Example

To add a datum (d) to graphs 1 and 3:

d.AddToGraph(1,3);

To add a datum (d) to all graphs:

d.AddToGraph();

Delete(datum[string]) [static]

Description

Deletes a datum

Arguments

Name	Type	Description
datum	string	Acronym of datum to delete

Return type

No return value

Example

To delete datum "my_datum"

Datum.Delete("my_datum");

Exists(datum[string]) [static]

Description

Checks if a datum exists

Arguments

Name	Type	Description
datum	string	Acronym of datum to check

Return type

TRUE if the datum exists, otherwise FALSE

Example

To check if a datum "my_datum" exists

var exists = Datum.Exists("my_datum");

First() [static]

Description

Returns the first datum.

No arguments

Return type

Datum object (or null if there are no datum in the model).

Example

To get the 1st datum

```
var d = Datum.First();
```

GetFromAcronym(datum[string]) [static]

Description

Returns the datum object for a datum acronym.

Arguments

Name	Type	Description
datum	string	Acronym of datum to return object for

Return type

Datum object (or null if the datum does not exist).

Example

To get the datum "my_datum"

```
var d = Datum.GetFromAcronym("my_datum");
```

Next()

Description

Returns the next datum in the model.

Arguments

No arguments

Return type

Datum object (or null if there are no more datums in the model).

Example

To get the next datum after datum d:

```
var datum = d.Next();
```

RemoveFromGraph(graph, graph...[int])

Description

Removes a datum from a graph.

Arguments

Name	Type	Description
graph, graph		Optional list of graphs to remove the datum from, If undefined then the datum is removed from all graphs.

Return type

No return value.

Example

To remove a datum (d) from graphs 1 and 3:

d.RemoveFromGraph(1,3);

To remove a datum (d) from all graphs:

d.RemoveFromGraph();

Entity class

The Entity class contains constants relating to Entity types. More...

Entity constants

Name	Description
Entity.AIRBAG	AIRBAG entity code (for all airbag related entities)
Entity.AIRBAG_CHAMBER_DATA	AIRBAG CHAMBER DATA entity code
Entity.AIRBAG_CPM_SENSORS	AIRBAG CPM SENSORS entity code
Entity.AIRBAG_DATA	AIRBAG DATA entity code
Entity.AIRBAG_PART_DATA	AIRBAG PART DATA entity code
Entity.BEAM	BEAM entity code
Entity.BEAM_DISCRETE	DISCRETE BEAM entity code
Entity.BEAM_NORMAL	NORMAL BEAM entity code
Entity.BEARING	BEARING entity code
Entity.BOUNDARY	BOUNDARY entity code
Entity.BOUNDARY_DIS_NODAL_LOAD	DISCRETE NODAL LOAD entity code
Entity.BOUNDARY_DIS_RBODY_LOAD	DISCRETE RIGID BODY LOAD entity code
Entity.BOUNDARY_PRES_NODAL_LOAD	PRESSURE NODAL LOAD entity code
Entity.BOUNDARY_VEL_NODAL_LOAD	VELOCITY NODAL LOAD entity code
Entity.BOUNDARY_VEL_RBODY_LOAD	VELOCITY RIGID BODY LOAD entity code
Entity.CESE	CESE entity code
Entity.CESE_DRAG_DATA	CESE FSI DRAG DATA entity code
Entity.CESE_NODE_DATA	CESE NODE DATA entity code
Entity.CESE_POINT_DATA	CESE POINT DATA entity code
Entity.CESE_SEGMENT_DATA	CESE SEGMENT SET DATA entity code
Entity.CONTACT	CONTACT entity code
Entity.CONTACT_ENERGIES	CONTACT ENERGIES entity code
Entity.CONTACT_FORCES	CONTACT FORCES entity code
Entity.CURVOUT	CURVOUT entity code
Entity.EM	EM entity code
Entity.EM_NODE_DATA	EM NODE DATA entity code
Entity.EM_POINT_DATA	EM POINT DATA entity code
Entity.FSI	FSI entity code
Entity.FSI_SENSOR_DATA	FSI SENSOR DATA entity code
Entity.FSI_SURFACE_DATA	FSI SURFACE DATA entity code
Entity.GEOMETRIC_CONTACT	GEOMETRIC CONTACT entity code
Entity.ICFD	ICFD entity code
Entity.ICFD_DRAG_DATA	ICFD DRAG DATA entity code
Entity.ICFD_NODE_DATA	ICFD NODE DATA entity code

Entity.ICFD_POINT_DATA	ICFD POINT DATA entity code	
Entity.ICFD_THERMAL_DATA	ICFD THERMAL DATA entity code	
Entity.JOINT	JOINT entity code	
Entity.JOINT_FLEXION_TORSION	FLEXION TORSION JOINT entity code	
Entity.JOINT_GENERALIZED	GENERALIZED JOINT entity code	
Entity.JOINT_JOINT	Conventional LS-DYNA JOINT entity code	
Entity.JOINT_TRANSLATIONAL	TRANSLATIONAL JOINT entity code	
Entity.MASS	MASS entity code	
Entity.MODEL	MODEL entity code	
Entity.NODAL_RB	NODAL RIGID BODY entity code	
Entity.NODAL_RB_BODY	BODY in NODAL RIGID BODY entity code	
Entity.NODAL_RB_PART	PART in NODAL RIGID BODY entity code	
Entity.NODE	NODE entity code	
Entity.NODE_GROUP	NODAL FORCE GROUP entity code	
Entity.NODE_GROUP_GROUPS	GROUPS in NODAL FORCE GROUP entity code	
Entity.NODE_GROUP_NODES	NODES in NODAL FORCE GROUP entity code	
Entity.PART	PART entity code	
Entity.PART_GROUP	PART GROUP entity code	
Entity.PBLAST	PBLAST entity code	
Entity.PBLAST_DATA	PBLAST DATA entity code	
Entity.PBLAST_PART	PBLAST PART entity code	
Entity.PRETENSIONER	PRETENSIONER entity code	
Entity.PRTUBE	PRTUBE entity code	
Entity.PULLEY	PULLEY entity code	
Entity.RETRACTOR	RETRACTOR entity code	
Entity.RIGIDWALL	RIGIDWALL entity code	
Entity.SEATBELT	SEATBELT entity code	
Entity.SHELL	SHELL entity code	
Entity.SLIPRING	SLIPRING entity code	
Entity.SOLID	SOLID entity code	
Entity.SPC	SPC entity code	
Entity.SPC_FORCES	SPC FORCES entity code	
Entity.SPC_MODEL	SPC MODEL entity code	
Entity.SPC_MOMENTS	SPC MOMENTS entity code	
Entity.SPC_SET	SPC SET entity code	
Entity.SPH	SPH entity code	
Entity.SPRING	SPRING entity code	
Entity.SPRING_ROTATIONAL	ROTATIONAL SPRING entity code	
Entity.SPRING_TRANSLATIONAL	TRANSLATIONAL SPRING entity code	
	<u> </u>	

Entity.SUBSYSTEM	SUBSYSTEM entity code
Entity.THICK_SHELL	THICK SHELL entity code
Entity.TRACER	TRACER entity code
Entity.WELD	WELD entity code
Entity.WELD_ASSEMBLY	WELD ASSEMBLY entity code
Entity.WELD_CONSTRAINED	CONSTRAINED WELD entity code
Entity.WELD_GENERALISED	GENERALISED WELD entity code
Entity.WELD_NON_NODAL	NON-NODAL WELD entity code
Entity.WELD_SOLID	SOLID WELD entity code
Entity.WELD_SPOTWELD_BEAMS	SPOTWELD BEAMS entity code
Entity.X_SECTION	CROSS SECTION entity code

Detailed Description

The Entity class is used to define entity type codes that can then be compared with the entity Curve property and input for functions in the Model class.

Node = Entity.NODE;

File class

The File class allows you to read and write text files. More...

Class functions

- Copy(source[string], dest[string])
- Delete(filename[string])
- DriveMapFilename(filename[string], format[constant])
 Exists(filename[string])
- FindFiles(directory[string], type (optional)[constant])
- Get(url/string), filename/string), options (optional)[object])
- <u>IsAbsolute(filename[string])</u>
- IsDirectory(filename[string])
- IsFile(filename[string])
- IsReadable(filename[string])
- IsWritable(filename[string])
- Mkdir(directory[string])
- Mktemp()
- Proxy(name[string])
- ProxyPassword(name[string])
- ProxyUsername(username[string])
- ReadCSV(filename[string], delimiter (optional)[string], comment (optional)[string])
- Rename(oldname/string), newname(string))
- Size(filename[string])
- <u>Upload</u>(filename[string], url[string], options (optional)[object])

Member functions

- FindLineContaining(contain1[string], contain2 (optional)[string], contain3 (optional)[string], ... containn (optional)[string])
- FindLineStarting(start1[string], start2 (optional)[string], start3 (optional)[string], ... startn (optional)[string])
- Flush() ReadAll()
- ReadArrayBuffer(length (optional)[integer])
- ReadChar()
- ReadLine()
- ReadLongLine()
- Seek(offset[integer], origin (optional)[constant])
- Write(string[Any valid javascript type])
- WriteArrayBuffer(buffer[ArrayBuffer], length (optional)[integer])
- Writeln(string[Any valid javascript type])

File constants

Name	Description		
File.APPEND	Flag to open file for appending		
File.BINARY	Flag to open file in binary mode. This will have no effect on unix/linux but for windows if a file is opened for writing with binary mode \n will not be translated to \r\n (CRLF), it will be written as \n LF)		
File.READ	Flag to open file for reading		
File.UTF8	Flag to open file for reading as UTF-8 encoding.		
File.WRITE	Flag to open file for writing		

Constants for Seek types

Name	Description
File.CURRENT	Seek relative to current file position
File.END	Seek relative to end of the file
File.START	Seek relative to start of the file

Constants for Find types

Name	Description
File.DIRECTORY	Find directories
File.FILE	Find files

File properties

Name	Type	Description
filename (read only)	string	Name of the file
mode (read only)	constant	Mode the file was opened with (<u>File.READ</u> , <u>File.WRITE</u> etc)

Detailed Description

The File class gives you simple functions to read and write text files. The following simple example shows how to read from the file "/data/test/file.txt" and print each line read to the dialogue box:

```
var f, line;
f = new File("/data/test/file.txt", File.READ);
while ( (line = f.ReadLine()) != undefined)
{
    Message(line);
}
f.Close();
The following simple example shows how to write the numbers 1 to 10.
```

The following simple example shows how to write the numbers 1 to 10 to the file "/data/test/file.txt":

```
var n, line;
f = new File("/data/test/file.txt", File.WRITE);
for (n=1; n<=10; n++)
{
    f.Writeln(n);
}
f.Close();</pre>
```

See the documentation below for more details.

Constructor

new File(filename[string], mode[constant])

Description

Create a new File object for reading and writing text files.

Arguments

Name	Type	Description
filename	string	Filename of the file you want to read/write. If reading, the file must exist. If writing, the file will be overwritten (if it exists) if mode is File.WRITE, or if mode is File.APPEND it will be appended to if it exists, or created if it does not. When reading a file the filename can also be a URL (uniform resource locator) in which case the file will be read from the remote site. See File.Get() for more details on the format of the URL.
mode	constant	The mode to open the file with. Can be <u>File.READ</u> , <u>File.WRITE</u> or <u>File.APPEND</u> . For <u>File.WRITE</u> or <u>File.APPEND</u> it can also be ORed with <u>File.BINARY</u> if required. By default text is read and written as ASCII. To read/write text in utf-8 mode can also be ORed with <u>File.UTF8</u> if required.

Return type

File object

Example

```
To create a new file object to read file "/data/test/file.txt"

var f = new File("/data/test/file.txt", File.READ);
```

Details of functions

Close()

Description

Close a file opened by a File object.

Arguments

No arguments

Return type

No return value

Example

To close File object f.

f.Close();

Copy(source[string], dest[string]) [static]

Description

Copies a file

Arguments

Name	Туре	Description
source	string	Source filename you want to copy.
dest	string	Destination filename you want to copy source file to.

Return type

true if copy successful, false otherwise.

Example

```
To copy the file "/data/test/file.key" to "/data/test/file.key_backup"
```

```
var copied = File.Copy("/data/test/file.key", "/data/test/file.key_backup");
```

Delete(filename[string]) [static]

Description

Deletes a file

Arguments

Name	Type	Description
filename	string	Filename you want to delete.

Return type

true if successful, false if not.

Example

To delete the file "/data/test/file.key"

```
var deleted = File.Delete("/data/test/file.key");
```

DriveMapFilename(filename[string], format[constant]) [static]

Description

Changes a filename or directory name to the correct format for a specific operating system using the directory mappings (if present)

Arguments

Name	Type	Description	
filename	string	Filename you want to drive map.	
format	constant The format for the file/directory name. Can be <u>Include.NATIVE</u> , <u>Include.UNIX</u> or <u>Include.WINDOWS</u>		

Return type

string containing drive mapped filename

Example

If T/HIS has drive S: mapped to "/data" (by using the primer*drive_s, this*drive_s, d3plot*drive_s or oasys*drive_s preference)

```
var mapped = File.DriveMapFilename("/data/test/file.key", Include.WINDOWS);
mapped will be "S:\test\file.key".
```

```
var mapped = File.DriveMapFilename("S:\\test\\file.key", Include.UNIX);
mapped will be "/data/test/file.key".
```

Exists(filename[string]) [static]

Description

Check if a file exists. See also File.IsDirectory() and See also File.IsFile().

Arguments

Name	Type	Description
filename	string	Filename you want to check for existance.

Return type

true/false

Example

To see if the file "/data/test/file.key" exists

```
if (File.Exists("/data/test/file.key")) { do something }
```

FindFiles(directory[string], type (optional)[constant]) [static]

Description

Find any files and/or directories in a directory.

Arguments

Name	Type	Description
directory	string	Directory to look for files/directories in.
type (optional)		Type of things to find. Can be bitwise OR of <u>File.FILE</u> and <u>File.DIRECTORY</u> . If omitted only files will be returned.

Return type

Array of filenames/directories

Example

```
To return the filenames in the directory /data/test:

var fileList = File.FindFiles("/data/test")

To return the directories in the directory /data/test:

var fileList = File.FindFiles("/data/test", File.DIRECTORY)
```

To return the files and directories in the directory /data/test: var fileList = File.FindFiles("/data/test", File.FILE|File.DIRECTORY)

FindLineContaining(contain1[string], contain2 (optional)[string], contain3 (optional)[string], ... containn (optional)[string])

Description

Reads a line from a file which contains **contain**, opened for reading by a File object. Although this is possible using core JavaScript functions this function should be significantly faster as most of the processing is done by Primer in C rather than in the JavaScript interpreter. To enable this function to be as fast as possible a maximum line length of 512 characters is used. If you expect a file to have lines longer than 512 characters then use ReadLongLine which allows lines of any length. If one argument is used then the line must contain that string. If more than one argument is used then lines which contain the string contain 1 OR contain 2 OR contain 3 etc will be returned

Arguments

Name	Type	Description
contain1	string	String which matching lines must contain
contain2 (optional)	string	alternative string which matching lines must contain
contain3 (optional)	string	alternative string which matching lines must contain
containn (optional)	string	alternative string which matching lines must contain

Return type

string read from file or undefined if end of file

Example

```
Loop, reading lines from <a href="File">File</a> object f which contain 'example'.

var line;

while ( (line = f.FindLineContaining("example") ) != undefined)

{
}
```

FindLineStarting(start1[string], start2 (optional)[string], start3 (optional)[string], ... startn (optional)[string])

Description

Reads a line from a file which starts with start, opened for reading by a File object. Although this is possible using core JavaScript functions this function should be significantly faster as most of the processing is done by Primer in C rather than in the JavaScript interpreter. To enable this function to be as fast as possible a maximum line length of 512 characters is used. If you expect a file to have lines longer than 512 characters then use ReadLongLine which allows lines of any length. If one argument is used then the line must start with that string. If more than one argument is used then lines which start with start1 OR start2 OR start3 etc will be returned

Name	Type	Description
start1	string	String which matching lines must start with
start2 (optional)	string	alternative string which matching lines must start with
start3 (optional)	string	alternative string which matching lines must start with
startn (optional)	string	alternative string which matching lines must start with

Return type

string read from file or undefined if end of file

Example

```
Loop, reading lines from <a href="File">File</a> object f which start 'example'.

var line;
while ( (line = f.FindLineStarting("example") ) != undefined)
{
}
```

Flush()

Description

Flushes a file opened for writing by a File object.

Arguments

No arguments

Return type

No return value

Example

```
To flush File object f.
```

```
f.Flush();
```

Get(url[string], filename[string], options (optional)[object]) [static]

Description

Get a file from a remote location. See also File.Proxy(), File.ProxyPassword() and File.ProxyUsername().

Name	Туре	Description
url	string	URL (uniform resource locator) of remote file you want to get. Currently http and ftp are supported. For http give the full address including the leading 'http://'. e.g. 'http://www.example.com/file.html'. For ftp an optional username and password can be given. e.g. 'ftp://ftp.example.com' retrieves the directory listing for the root directory. 'ftp://ftp.example.com/readme.txt' downloads the file readme.txt from the root directory. 'ftp://user:password@ftp.example.com/readme.txt' retrieves the readme.txt file from the user's home directory.
filename	string	Filename you want to save the file to.
options (optional)	object	Options for get. Currently the only available properties are 'username' (string), 'password' (string) and 'response' (boolean). If 'username' and 'password' are set then basic authorization using the username and password will be used. If 'response' is used and is true then the response code will be returned instead of true/false. This can be used to retrieve error messages and codes when the file is not returned successfully.

Return type

true if file was successfully got, false otherwise.

Example

To get the file "http://www.example.com/file.html" and save it to C:\temp:

```
File.Get("http://www.example.com/file.html", "C:\temp\file.html");
```

IsAbsolute(filename[string]) [static]

Description

Check if a filename is absolute or relative.

Arguments

Name	Type	Description
filename	string	Filename you want to check.

Return type

true/false

Example

To see if the filename "/data/test" is absolute (which it is!)

```
if (File.IsAbsolute("/data/test")) { do something }
```

IsDirectory(filename[string]) [static]

Description

Check if a filename is a directory. See also File.Exists(), File.IsFile(), File.IsReadable() and File.IsWritable().

Arguments

Name	Type	Description
filename	string	Filename you want to check.

Return type

true/false

```
To see if the filename "/data/test" is a directory if (File.IsDirectory("/data/test")) { do something }
```

IsFile(filename[string]) [static]

Description

Check if a filename is a file. See also File. Exists(), File. IsDirectory(), File. IsReadable() and File. IsWritable().

Arguments

Name	Type	Description
filename	string	Filename you want to check.

Return type

true/false

Example

```
To see if the filename "/data/test" is a file
if (File.IsFile("/data/test")) { do something }
```

IsReadable(filename[string]) [static]

Description

Check if a filename has read permissions. See also File.Exists(), File.IsDirectory() and File.IsWritable().

Arguments

Name	Type	Description
filename	string	Filename you want to check.

Return type

true/false

Example

```
To see if the filename "/data/test" is readable
if (File.IsReadable("/data/test")) { do something }
```

IsWritable(filename/string)) [static]

Description

Check if a filename has write permissions. If *filename* exists and it is a file then it is checked to see if it can be opened with write (File.APPEND permissions). If *filename* exists and it is a directory then the directory is checked for write permission (can files be created in the directory). If *filename* does not exist then it is assumed to be a file and is checked to see if it can be opened for writing (File.WRITE permissions). See also <u>File.Exists()</u>, <u>File.IsDirectory()</u> and File.IsReadable().

Arguments

Name	Type	Description
filename	string	Filename you want to check.

Return type

true/false

Example

To see if the filename "/data/test" is writable

```
if (File.IsWritable("/data/test")) { do something }
```

Mkdir(directory[string]) [static]

Description

Make a directory.

Arguments

Name	Type	Description
directory	string	The name of the directory you want to create.

Return type

true if successfully created, false if not.

Example

To make the directory "/data/test"

```
var success = File.Mkdir("/data/test");
```

Mktemp() [static]

Description

Make a temporary filename for writing a temporary file.

Arguments

No arguments

Return type

String name of temporary filename that can be used.

Example

To get a temp filename"

```
var filename = File.Mktemp();
```

Proxy(name[string]) [static]

Description

Set a proxy for files opened by http, ftp etc. See also $\underline{File.Get()}$, $\underline{File.ProxyPassword()}$ and $\underline{File.ProxyUsername()}$.

Arguments

Name	Type	Description
name	string	The name of the proxy.

Return type

No return value

To set the proxy to "http://example.proxy.com" using port 80:

File.Proxy("http://example.proxy.com:80");

ProxyPassword(name[string]) [static]

Description

Set a proxy password for files opened by http, ftp etc. See also File.Get(), File.Proxy() and File.ProxyUsername().

Arguments

Name	Type	Description
name	string	Password for the proxy server.

Return type

No return value

Example

To set the proxy password to "password":

File.ProxyPassword("password");

ProxyUsername(username[string]) [static]

Description

Set a proxy username for files opened by http, ftp etc. See also File.Get(), File.Proxy() and File.ProxyPassword().

Arguments

Name	Type	Description
username	string	The username for the proxy.

Return type

No return value

Example

To set the proxy username to "username":

File.ProxyUsername("username");

ReadAll()

Description

Reads **all** the remaining characters from a file opened for reading by a <u>File</u> object. As this function can read the entire file as a string be careful when reading large files as it will consume large amounts of memory.

Arguments

No arguments

Return type

characters read from file or

undefined

if end of file

Read all characters from File object f.

```
var c = f.ReadAll();
```

ReadArrayBuffer(length (optional)[integer])

Description

Reads binary data from a file opened for reading by a File object. The data is returned as an ArrayBuffer object. For more details on how to use an <u>ArrayBuffer</u> see the following links:

https://developer.mozilla.org/en/JavaScript_typed_arrays

https://developer.mozilla.org/en/JavaScript_typed_arrays/ArrayBuffer

https://developer.mozilla.org/en/JavaScript_typed_arrays/ArrayBufferViewhttps://developer.mozilla.org/en/JavaScript_typed_arrays/DataView.

Arguments

Name	Type	Description
length (optional)		Number of bytes to try to read from the file. If omitted all the remaining data from the file will be read.

Return type

ArrayBuffer object or undefined if end of file

Example

To read data as 32bit unsigned integers from File object f.

```
var ab = f.ReadArrayBuffer();
var u32 = new Uint32Array(ab);
for (var i=0; i<u32.length; i++
    var value = u32[i];
```

ReadCSV(filename/string), delimiter (optional)/string), comment (optional)/string)) [static]

Description

Reads the input CSV file and returns an array of string arrays. If the CSV file has legitimate records the function returns an Array object containing sub-arrays of strings otherwise the function returns NULL. The lengths of all the sub-arrays are the same and equal to maximum number of fields in any of the records. For records in a CSV file having fewer fields, the respective sub-arrays are padded with NULL elements to the maximum array length.

Arguments

Name	Type	Description
filename	string	Filename you want to read CSV options from.
delimiter (optional)	string	Delimiter string to be used. Default is a comma (",").
comment (optional)	string	Comment string to be used. Default is a dollar sign ("\$").

Return type

Array object containing string arrays.

```
To Read CSV file "sample.csv" and print all records to a Window.
var csv file path = "C:\\sample.csv";
var records = "";
if(!File.Exists(csv file path))
    Window.Information("CSV file %s not present", csv file path);
    Exit();
var csv array = File.ReadCSV(csv file path);
if(csv array != null)
    for(var i = 0; i < csv array.length; i++)</pre>
        var record_array = csv_array[i];
        for(var j = 0; j < record array.length; j++)</pre>
             if(record array[j] != null)
                 records = records + record_array[j] + " , ";
        records = records + "\n";
Options.max window lines = csv array.length;
Window.Information("File.ReadCSV Ouptut", records);
To Read CSV file "sample.csv" with delimiter string "::" and comment string "##".
var csv array = File.ReadCSV(csv file path, "::", "##");
```

ReadChar()

Description

Reads a single character from a file opened for reading by a File object.

Arguments

No arguments

Return type

character read from file or

undefined

if end of file

Example

```
Loop, reading characters from File object f.
```

```
var c;
while ( (c = f.ReadChar()) != undefined) { ... }
```

ReadLine()

Description

Reads a line from a file opened for reading by a <u>File</u> object. To enable this function to be as fast as possible a maximum line length of 512 characters is used. If you expect a file to have lines longer than 512 characters then use <u>ReadLongLine</u> which allows lines of any length.

Arguments

No arguments

Return type

string read from file or

undefined

if end of file

Example

```
Loop, reading lines from File object f.
```

```
var line;
while ( (line = f.ReadLine()) != undefined) { ... }
```

ReadLongLine()

Description

Reads a line from a file opened for reading by a <u>File</u> object. The line can be any length. If your file has lines shorter than 512 characters then you may want to use <u>ReadLine</u> instead which is faster.

Arguments

No arguments

Return type

string read from file or

undefined

if end of file

Example

```
Loop, reading lines from File object f.
```

```
var line;
while ( (line = f.ReadLongLine()) != undefined) { ... }
```

Rename(oldname[string], newname[string]) [static]

Description

Rename an existing file to have a different name.

Arguments

Name	Type	Description
oldname	string	Existing filename you want to rename
newname	string	New filename you want to rename to

Return type

true if successful, false if not.

Example

```
To rename the file "/data/test/file.key" to "/data/test/new_file.key"
```

```
var size = File.Rename("/data/test/file.key", "/data/test/new_file.key");
```

Seek(offset[integer], origin (optional)[constant])

Description

Set the current position for reading or writing in a File object.

Arguments

Name	Type	Description
offset	integer	Offset to seek to in the file
origin (optional)		Origin for offset. Must be one of <u>File.START</u> , <u>File.END</u> or <u>File.CURRENT</u> . If omitted <u>File.START</u> will be used.

Return type

no return value

Example

```
To seek to the end of <u>File</u> f:

f.Seek(0, File.END);

To seek to the beginning of <u>File</u> f:

f.Seek(0, File.START);

To move forward 10 characters in <u>File</u> f:

f.Seek(10, File.CURRENT);
```

Size(filename[string]) [static]

Description

Return the size of a file in bytes

Arguments

Name	Type	Description
filename	string	Filename you want the size of.

Return type

size in bytes

Example

```
To get the size of the file "/data/test/file.key"

var size = File.Size("/data/test/file.key");
```

Tell()

Description

Return the current file position for a <u>File</u> object. Note that on Windows when reading files if the file is not opened with <u>File.BINARY</u> this may not return the correct file position for files with unix line endings.

Arguments

No arguments

Return type

integer

To get the current file position for File f:

```
var pos = f.Tell();
```

Upload(filename[string], url[string], options (optional)[object]) [static]

Description

Uploads a file to a remote location. See also File.Proxy(), File.ProxyPassword() and File.ProxyUsername().

Arguments

Name	Type	Description
filename	string	Filename you want to upload.
url		URL (uniform resource locator) of the remote location you want to upload the file to. Currently only http is supported. Give the full address including the leading 'http://'. e.g. 'http://www.example.com/file.html'.
options (optional)	object	Options for upload. Currently the only available properties are 'username' and 'password'. If both of these are set then basic authorization using the username and password will be used.

Return type

true if file was successfully uploaded, false otherwise.

Example

```
To upload the file "C:\temp\file.txt" to "http://www.example.com/file.txt": File.Upload("C:/temp/file.txt", "http://www.example.com/file.txt");
```

Write(string[Any valid javascript type])

Description

Write a string to a file opened for writing by a File object. Note that a carriage return is not added.

Arguments

Name	Туре	Description
string	Any valid javascript type	The string/item that you want to write

Return type

No return value

Example

```
To write string "Hello, world!" to \underline{File} object f f.Write("Hello, world!\n");

To write the title of model m to \underline{File} object f f.Write("The title of model 2 is " + m.title + "\n");
```

WriteArrayBuffer(buffer[ArrayBuffer], length (optional)[integer])

Description

Writes binary data to a file opened for writing by a File object. The data to write is an ArrayBuffer object. For more details on how to use an ArrayBuffer see the following links:

https://developer.mozilla.org/en/JavaScript_typed_arrays

https://developer.mozilla.org/en/JavaScript_typed_arrays/ArrayBufferhttps://developer.mozilla.org/en/JavaScript_typed_arrays/ArrayBufferView

https://developer.mozilla.org/en/JavaScript_typed_arrays/DataView.

Arguments

Name	Type	Description
buffer	ArrayBuffer	ArrayBuffer to write to file
length (optional)	integer	Number of bytes to write to the file. If omitted all the data in the <u>ArrayBuffer</u> will be written (buffer.byteLength bytes)

Return type

No return value

Example

To write ArrayBuffer ab to File object f.

f.WriteArrayBuffer(ab);

Writeln(string[Any valid javascript type])

Description

Write a string to a file opened for writing by a File object adding a carriage return.

Arguments

Name	Туре	Description
string	Any valid javascript type	The string/item that you want to write

Return type

No return value

Example

To write string "Hello, world!" to File object f automatically adding a carriage return

f.Writeln("Hello, world!");

To write the title of model m to File object f automatically adding a carriage return

f.Writeln("The title of model 2 is " + m.title);

Graph class

The Graph class gives you access to graphs in T/HIS. More...

Class functions

- DeleteFromID(ID[integer])
 GetFromID(ID[integer])
- Total()

Member functions

- AddCurveID() AddToPage()

- Delete()
 GetAllCurveIDs()
 GetAllPageIDs()

- GetNumCurves()
 RemoveCurveID()
 RemoveFromPage()

Graph constants

Name	Description
Graph.AXIS_LINEAR	Linear axis type
Graph.AXIS_LOG	Logarithmic axis type
Graph.FONT_COURIER_BOLD	Courier bold font
Graph.FONT_COURIER_MEDIUM	Courier medium font
Graph.FONT_DEFAULT	Takes the font defined in the preference file
Graph.FONT_HELVETICA_BOLD	Helvetical bold font
Graph.FONT_HELVETICA_MEDIUM	Helvetical medium font
Graph.FONT_SIZE_10	10 point font size
Graph.FONT_SIZE_12	12 point font size
Graph.FONT_SIZE_14	14 point font size
Graph.FONT_SIZE_18	18 point font size
Graph.FONT_SIZE_24	24 point font size
Graph.FONT_SIZE_8	8 point font size
Graph.FONT_SIZE_AUTO	Font size would be automatically adjusted based on the graph area
Graph.FONT_TIMES_BOLD	Times New Roman bold font
Graph.FONT_TIMES_MEDIUM	Times New Roman medium font
Graph.GRID_OFF	Turn off the grid.
Graph.GRID_ON	Turn on the grid.
Graph.LEGEND_1_COLUMN	Curve labels will be displayed in a single column in the legend
Graph.LEGEND_2_COLUMN	Curve labels will be displayed in two columns in the legend
Graph.LEGEND_AUTO	Automatic legend layout (see <u>Layout</u>)
Graph.LEGEND_COLUMN_LIST	Column list legend layout (see <u>Layout</u>)
Graph.LEGEND_FLOATING	Floating legend layout (see <u>Layout</u>)
Graph.LEGEND_OFF	Off legend layout (see <u>Layout</u>)
Graph.NO	Flag for no.
Graph.OFF	Flag to turn off.

Graph.ON	Flag to turn on.
Graph.PREFIX_AUTO	Automatically add prefix to the curve label in the legend (see <u>Legend</u>)
Graph.PREFIX_DIR	Directory name of the model will be used as the curve label prefix in the legend (see <u>Legend</u>)
Graph.PREFIX_MODEL_NUMBER	Model number will be used as the curve label prefix in the legend (see Legend)
Graph.PREFIX_OFF	Turn off the curve label prefix in the legend (see <u>Legend</u>)
Graph.PREFIX_ON	Add prefix to the curve label in the legend (see <u>Legend</u>)
Graph.PREFIX_THF	Root name of the THF file will be used as the curve label prefix in the legend (see <u>Legend</u>)
Graph.PREFIX_USER_DEFINED	A user defined prefix will be used as the curve label prefix in the legend (see <u>Legend</u>)
Graph.YES	Flag for yes.

Graph properties

Name	Type	Description
active	constant	If the graph is active or inactive. Can take Graph.YES or Graph.NO
add_x_units	constant	shows x-axis units. It can take either Graph.ON or Graph.OFF
add_y2_units	constant	shows second y-axis units. It can take either Graph.ON or Graph.OFF
add_y_units	constant	shows y-axis units. It can take either Graph.ON or Graph.OFF
auto_xlabel	constant	Turn on to set label for the x-axis automatically and turn off to define the label for the x-axis manually using the property xlabel. Can take either Graph.ON or Graph.OFF
auto_xmax	constant	Can take either Graph.ON or Graph.OFF. Graph.ON will set the maximum value for the y-axis range automatically and Graph.OFF will use the property xmax value as the maximum value for the x-axis range
auto_xmin	constant	Can take either Graph.ON or Graph.OFF. Graph.ON will set the minimum value for the x-axis range automatically and Graph.OFF will use the property xmin value as the minimum value for the x-axis range
auto_y2label	constant	Turn on to set label for the second y-axis automatically and turn off to define the label for the second y-axis manually using the property y2label. Can take either Graph.ON or Graph.OFF
auto_y2max	constant	Can take either Graph.ON or Graph.OFF. Graph.ON will set the maximum value for the second y-axis range automatically and Graph.OFF will use the property y2max value as the maximum value for the second y-axis range
auto_y2min	constant	Can take either Graph.ON or Graph.OFF. Graph.ON will set the minimum value for the second y-axis range automatically and Graph.OFF will use the property y2min value as the minimum value for the second y-axis range
auto_ylabel	constant	Turn on to set label for the y-axis automatically and turn off to define the label for the y-axis manually using the property ylabel. Can take either Graph.ON or Graph.OFF
auto_ymax	constant	Can take either Graph.ON or Graph.OFF. Graph.ON will set the maximum value for the y-axis range automatically and Graph.OFF will use the property ymax value as the maximum value for the y-axis range
auto_ymin	constant	Can take either Graph.ON or Graph.OFF. Graph.ON will set the minimum value for the y-axis range automatically and Graph.OFF will use the property ymin value as the minimum value for the y-axis range
background_colour	Colour	Graph background colour
foreground_colour	Colour	Graph foreground colour

id integer Graph ID (read only) legend_background_colour Colour Background colour for the legend area legend_background_truns integer Transparancy of the legend area. The value should lie between 0 and 100 legend_font Constant Font for the curve labels in the legend. Can take either Graph.FONT_DEFAULT, Graph.FONT_HELVETICA_MEDIUM, Graph.FONT_DEFAULT, Graph.FONT_HELVETICA_MEDIUM, Graph.FONT_OURIER_MEDIUM or Graph.FONT_GRAPH_FONT_GRAPH_FONT_GRAPH_FONT_COURIER_MEDIUM or Graph.FONT_SIZE_BOLD, Graph.FONT_COURIER_MEDIUM or Graph.FONT_SIZE_BOLD, Graph.FONT_SIZE_MEDIUM or Graph.FONT_SIZE_BOLD, Graph.FONT_SIZE_MEDIUM or Graph.FONT_SIZE_BOLD, Graph.FONT_SIZE_	grid	constant	To turn on/off the grid. Can take Graph.GRID_ON or Graph.GRID_OFF
legend_background_colour legend_background_trams legend_background_trams integer Transparancy of the legend area. The value should lie between 0 and 100 Font for the curve labels in the legend. Can take either Graph-FONT_DEFAULT, Graph-FONT_HELVETICA_MEDIUM, Graph-FONT_HELVETICA_BOLD, Graph-FONT_TIMES_MEDIUM, Graph-FONT_TONT_ENDE_BOLD_Graph-FONT_TIMES_MEDIUM, Graph-FONT_COURIER_BOLD_D legend_font_colour Colour Font colour for the curve labels in the legend. Can take either Graph-FONT_SIZE_BOLD_FOLD_TOLD_TOLD_TOLD_GRAPH-FONT_SIZE_BOLD_Graph-FONT_SIZ			
legend_background_trans integer Transparancy of the legend area. The value should lie between 0 and 100 legend_font constant Graph.FONT_DEFAULT, Graph.FONT_HIVETICA_MEDIUM, Graph.FONT_INTENT_COURLER_MEDIUM or Graph.FONT_INDER_BOLD. Graph.FONT_TIMES_MEDIUM. Graph.FONT_INDER_BOLD. Graph.FONT_COURLER_MEDIUM or Graph.FONT_INDER_BOLD. Graph.FONT_COURLER_MEDIUM or Graph.FONT_COURLER_MEDIUM or Graph.FONT_COURLER_MEDIUM or Graph.FONT_SIZE_BOLD. Graph.FONT_SIZE_B		_	¥1
constant Font for the curve labels in the legend. Can take either Graph.FONT_DEFAULT, Graph.FONT_HELVETICA_MEDIUM, Graph.FONT_DEFAULT, Graph.FONT_HELVETICA_MEDIUM, Graph.FONT_TIMES_DONT_HELVETICA_MEDIUM, Graph.FONT_COURIER_MEDIUM or Graph.FONT_TIMES_BOLD. Graph.FONT_COURIER_MEDIUM or Graph.FONT_SIZE_DEFON			
Graph.FONT_DEFAULT, Graph.FONT_HELVETICA BOLD, Graph.FONT_TIMES_MEDIUM, Graph.FONT_HONT_HELVETICA_BOLD, Graph.FONT_TIMES_BOLDMAGRAPH.FONT_COURIER_MEDIUM or Graph.FONT_COURIER_MEDIUM or Graph.FONT_COURIER_MEDIUM or Graph.FONT_SONT_COURIER_MEDIUM or Graph.FONT_SIZE_HO			
legend_font_size constant Font size for the curve labels in the legend. Can take either Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24 Legend_prefix_format constant Format of the prefix that is being included in the curve label of the legend. Can take either Graph.PREFIX_MODEL_NUMBER, Graph.DIR, Graph.PREFIX_THF or Graph.PREFIX_USER_DEFINED Legend_show_user_lines constant Include the prefix in the curve label of the legend. Can take either Graph.PREFIX_AUTO, Graph.PREFIX_ON or Graph.PREFIX_OFF Legend_show_user_lines constant Visibility of user lines when Graph.LEGEND_COLUMN_LIST is selected for legend_user_line_1 string Legend_user_line_1 string User defined line 1 from the legend area Font size for the user defined line 1. Can take either Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24 Legend_user_line_2 string User defined line 2 from the legend area Font size for the user defined line 2. Can take either Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24 Legend_user_line_3 string User defined line 3 from the legend area Legend_user_line_3 string User defined line 3 from the legend area Legend_user_line_3 string User defined line 3 from the legend area Legend_user_line_4 string User defined line 4 from the legend area Legend_user_line_4 string User defined line 4 from the legend area Legend_user_line_4 string User defined line 4 from the legend area Font size for the user defined line 3. Can take either Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_8, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_8, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_8, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_S	legend_tont	constant	Graph.FONT_DEFAULT, Graph.FONT_HELVETICA_MEDIUM, Graph.FONT_HELVETICA_BOLD, Graph.FONT_TIMES_MEDIUM, Graph.FONT_TIMES_BOLD, Graph.FONT_COURIER_MEDIUM or
Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12. Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_18 or Graph.FONT_SIZE_124	legend_font_colour	Colour	Font colour for the curve labels in the legend
Graph.LEGEND_AUTO, Graph.LEGEND_ÖFF or Graph.LEGEND_FLOATING	legend_font_size	constant	Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or
take either Graph.PREFIX_MODEL_NUMBER, Graph.DIR, Graph.PREFIX_THF or Graph.PREFIX_USER_DEFINED legend_show_prefix constant legend_show_user_lines constant Visibility of user lines when Graph.LEGEND_COLUMN_LIST is selected for legend_user_line_1 string User defined line 1 from the legend area legend_user_line_1 size constant Font size for the user defined line 1. Can take either Graph.FONT_SIZE_18 or Graph.FONT_SIZE_10, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_18 or Graph.FONT_SIZE_10, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_S	legend_layout	constant	Graph.LEGEND_AUTO, Graph.LEGEND_OFF or
Graph.PREFIX_AUTO, Graph.PREFIX_ON or Graph.PREFIX_OFF	legend_prefix_format	constant	take either Graph.PREFIX_MODEL_NUMBER, Graph.DIR,
legend_user_line_1 string User defined line 1 from the legend area legend_user_line_1_size constant legend_user_line_1_size constant	legend_show_prefix	constant	
legend_user_line_1_size constant Font size for the user defined line 1. Can take either Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12 legend_user_line_2 string User defined line 2 from the legend area constant Font size for the user defined line 2. Can take either Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12 legend_user_line_3 string User defined line 3 from the legend area legend_user_line_3 size constant Font size for the user defined line 3. Can take either Graph.FONT_SIZE_18 or Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_14, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24 legend_user_line_4 string User defined line 4 from the legend area legend_user_line_4_size constant Font size for the user defined line 4. Can take either Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_14, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18, Graph.FONT_SIZE_19, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18,	legend_show_user_lines	constant	
Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_10, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12 at User defined line 2 from the legend area legend_user_line_2_size constant Font size for the user defined line 2. Can take either Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24 legend_user_line_3 string User defined line 3 from the legend area legend_user_line_3_size constant Font size for the user defined line 3. Can take either Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_1	legend_user_line_1	string	User defined line 1 from the legend area
legend_user_line_2_size constant Font size for the user defined line 2. Can take either Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24 legend_user_line_3_size constant Font size for the user defined line 3. Can take either Graph.FONT_SIZE_10, Graph.FONT_SIZE_10, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24 legend_user_line_5 string User defined line 6 from the legend area legend_user_line_5_size constant Font size for the user defined line 5. Can take either Graph.FONT_SIZE_12, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24	legend_user_line_1_size	constant	Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or
Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12 and Itegend_user_line_3 string Itegend_user_line_3 size Itegend_user_line_3 size Itegend_user_line_3 size Itegend_user_line_4 Itegend_user_line_4 Itegend_user_line_4 Itegend_user_line_4 Itegend_user_line_4 Itegend_user_line_4 Itegend_user_line_4 Itegend_user_line_4 Itegend_user_line_4 Itegend_user_line_5 Itemed_user_line_6 Itemed_user_line_6 Itemed_user_line_6 Itemed_user_line_6	legend_user_line_2	string	User defined line 2 from the legend area
legend_user_line_3_size constant Font size for the user defined line 3. Can take either Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24 legend_user_line_4 string User defined line 4 from the legend area legend_user_line_4_size constant Font size for the user defined line 4. Can take either Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24 legend_user_line_5 string User defined line 6 from the legend area legend_user_line_5_size constant Font size for the user defined line 5. Can take either Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_13, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_13, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_19	legend_user_line_2_size	constant	Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or
Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24 legend_user_line_4	legend_user_line_3	string	User defined line 3 from the legend area
legend_user_line_4_size constant Font size for the user defined line 4. Can take either Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24 legend_user_line_5 string User defined line 6 from the legend area constant Font size for the user defined line 5. Can take either Graph.FONT_SIZE_10, Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24	legend_user_line_3_size	constant	Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or
Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24 legend_user_line_5 string User defined line 6 from the legend area constant Font size for the user defined line 5. Can take either Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_124	legend_user_line_4	string	User defined line 4 from the legend area
legend_user_line_5_size constant Font size for the user defined line 5. Can take either Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24	legend_user_line_4_size	constant	Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or
Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24	legend_user_line_5	string	User defined line 6 from the legend area
legend_user_line_6 string User defined line 6 from the legend area	legend_user_line_5_size	constant	Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or
	legend_user_line_6	string	User defined line 6 from the legend area

legend_user_line_6_size	constant	Font size for the user defined line 6. Can take either Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24
legend_user_lines_colour	Colour	Font colour for the user defined lines in the legend
legend_user_lines_font	constant	Font for the user defined lines in the legend. Can take either Graph.FONT_DEFAULT, Graph.FONT_HELVETICA_MEDIUM, Graph.FONT_HELVETICA_BOLD, Graph.FONT_TIMES_MEDIUM, Graph.FONT_TIMES_BOLD, Graph.FONT_COURIER_MEDIUM or Graph.FONT_COURIER_BOLD
num_legend_columns	constant	Number of columns of curve labels in legends. Can take Graph.LEGEND_1_COLUMN, Graph.LEGEND_2_COLUMN or Graph.LEGEND_3_COLUMN
show_xlabel	constant	Shows graph x-axis label. Can take either Graph.ON or Graph.OFF
show_y2label	constant	Shows graph second y-axis label. Can take either Graph.ON or Graph.OFF
show_ylabel	constant	Shows graph y-axis label. Can take either Graph.ON or Graph.OFF
title	string	Graph title
x_axis_type	constant	Defines x-axis type i.e. linear or logarithmic. Can take either Graph.AXIS_LINEAR or Graph.AXIS_LOG
x_unit_colour	Colour	Colour of the x-axis units
x_unit_decimals	integer	Defines the number decimals in the x-axis units.
x_unit_font	constant	Font for the x-axis units. Can take either Graph.FONT_DEFAULT, Graph.FONT_HELVETICA_MEDIUM, Graph.FONT_HELVETICA_BOLD, Graph.FONT_TIMES_MEDIUM, Graph.FONT_TIMES_BOLD, Graph.FONT_COURIER_MEDIUM or Graph.FONT_COURIER_BOLD
x_unit_format	constant	Defines the format for the x-axis units. Can take either Graph.AXIS_UNITS_AUTO, Graph.AXIS_UNITS_SCIENTIFIC or Graph.AXIS_UNITS_GENERAL
x_unit_size	constant	Font size for the x-axis units. Can take either Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24
xlabel	string	Label for x-axis
xlabel_colour	Colour	Colour of the x-axis label
xlabel_font	constant	Font for the x-axis label. Can take either Graph.FONT_DEFAULT, Graph.FONT_HELVETICA_MEDIUM, Graph.FONT_HELVETICA_BOLD, Graph.FONT_TIMES_MEDIUM, Graph.FONT_TIMES_BOLD, Graph.FONT_COURIER_MEDIUM or Graph.FONT_COURIER_BOLD
xlabel_size	constant	Font size for the x-axis label. Can take either Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24
xmax	real	Maximum value of x-axis range
xmin	real	Minimum value of the x-axis range
y2_axis_type	constant	Defines second y-axis type i.e. linear or logarithmic. Can take either Graph.AXIS_LINEAR or Graph.AXIS_LOG
y2_unit_colour	Colour	Colour of the second y-axis units
y2_unit_decimals	integer	Defines the number decimals in the second y-axis units.
y2_unit_font	constant	Font for the second y-axis label. Can take either Graph.FONT_DEFAULT, Graph.FONT_HELVETICA_MEDIUM, Graph.FONT_HELVETICA_BOLD, Graph.FONT_TIMES_MEDIUM, Graph.FONT_TIMES_BOLD, Graph.FONT_COURIER_MEDIUM or Graph.FONT_COURIER_BOLD

y2_unit_format	constant	Defines the format for the second y-axis units. Can take either Graph.AXIS_UNITS_AUTO, Graph.AXIS_UNITS_SCIENTIFIC or Graph.AXIS_UNITS_GENERAL
y2_unit_size	constant	Font size for the second y-axis units. Can take either Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24
y2label	string	Label for second y-axis
y2label_colour	Colour	Colour of the second y-axis label
y2label_font	constant	Font for the second y-axis label. Can take either Graph.FONT_DEFAULT, Graph.FONT_HELVETICA_MEDIUM, Graph.FONT_HELVETICA_BOLD, Graph.FONT_TIMES_MEDIUM, Graph.FONT_TIMES_BOLD, Graph.FONT_COURIER_MEDIUM or Graph.FONT_COURIER_BOLD
y2label_size	constant	Font size for the second y-axis label. Can take either Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24
y2max	real	Maximum value of the second y-axis range
y2min	real	Minimum value of the second y-axis range
y_axis_type	constant	Defines y-axis type i.e. linear or logarithmic. Can take either Graph.AXIS_LINEAR or Graph.AXIS_LOG
y_unit_colour	Colour	Colour of the y-axis units
y_unit_decimals	integer	The number decimals in the y-axis units.
y_unit_font	constant	Font for the y-axis units. Can take either Graph.FONT_DEFAULT, Graph.FONT_HELVETICA_MEDIUM, Graph.FONT_HELVETICA_BOLD, Graph.FONT_TIMES_MEDIUM, Graph.FONT_TIMES_BOLD, Graph.FONT_COURIER_MEDIUM or Graph.FONT_COURIER_BOLD
y_unit_format	constant	Defines the format for the y-axis units. Can take either Graph.AXIS_UNITS_AUTO, Graph.AXIS_UNITS_SCIENTIFIC or Graph.AXIS_UNITS_GENERAL
y_unit_size	constant	Font size for the y-axis units. Can take either Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24
ylabel	string	Label for y-axis
ylabel_colour	Colour	Colour of the y-axis label
ylabel_font	constant	Font for the y-axis label. Can take either Graph.FONT_DEFAULT, Graph.FONT_HELVETICA_MEDIUM, Graph.FONT_HELVETICA_BOLD, Graph.FONT_TIMES_MEDIUM, Graph.FONT_TIMES_BOLD, Graph.FONT_COURIER_MEDIUM or Graph.FONT_COURIER_BOLD
ylabel_size	constant	Font size for the y-axis label. Can take either Graph.FONT_SIZE_AUTO, Graph.FONT_SIZE_8, Graph.FONT_SIZE_10, Graph.FONT_SIZE_12, Graph.FONT_SIZE_14, Graph.FONT_SIZE_18 or Graph.FONT_SIZE_24
ymax	real	Maximum value of y-axis range
ymin	real	Minimum value of the y-axis range

Detailed Description

The Graph class contains information on the number of graphs. See the documentation below for more details.

Constructor

new Graph(index[integer])

Description

Create a new Graph.

Arguments

Name	Type	Description
index	integer	Graph index to copy initial display and axis settings from (optional). If not defined then the display and axis settings will be copied from those defined in the preference file.

Return type

Graph object

Example

To create a new graph and copy all of the setting from graph 2

```
var l = new Graph(2);
```

Details of functions

AddCurveID()

Description

Adds a curve to the graph.

Arguments

No arguments

Return type

Returns true if the curve is successfully added to the graph else it would return false

Example

To add a curve with id (n) to the graph (g):

```
g.AddCurveID(n);
```

AddToPage()

Description

Adds the graph to the page.

Arguments

No arguments

Return type

Returns true if the graph is successfully added to the page else it would return false

Example

To add a graph (g) to page id (n):

```
g.AddToPage(n);
```

Delete()

Description

Deletes the graph

Arguments

No arguments

Return type

No return value

Example

Deletes the graph (g)

g.Delete();

DeleteFromID(ID[integer]) [static]

Description

Deletes a graph

Arguments

Name	Type	Description
ID	integer	ID of graph to delete

Return type

No return value

Example

To delete the graph n

Graph.DeleteFromID(n);

Maximum number of graphs in T/HIS is 32

GetAllCurveIDs()

Description

Returns number curves present in the graph.

Arguments

No arguments

Return type

An array containing the curve ids of all the curves present in the graph

Example

To get the array of all the curve ids present in a graph (g):

```
var num = g.GetAllCurveIDs();
```

GetAllPageIDs()

Description

Returns all the pages containing the graph.

No arguments

Return type

Returns an array of page ids which contain the graph

Example

```
To get the list of all page ids containing the graph (g):
```

```
var pages ids = g.GetAllPageIDs();
```

GetFromID(ID[integer]) [static]

Description

Returns the graph object for a given graph id.

Arguments

Nam	e	Туре	Description
ID		integer	ID of graph to return the graph for

Return type

Graph object or NULL if graph does not exists

Example

To get the graph n

```
var num = Graph.GetFromID(n);
```

Maximum number of graphs in T/HIS is 32

GetNumCurves()

Description

Returns number curves present in the graph.

Arguments

No arguments

Return type

Number of curves present in the graph

Example

To find number of curves in a graph (g):

```
var num = g.GetNumCurves();
```

RemoveCurveID()

Description

Removs a curve from the graph.

Arguments

No arguments

Return type

Returns true if the curve is successfully removed from the graph else it would return false

To remove a curve with id (n) from the graph (g):

g.RemoveCurveID(n);

RemoveFromPage()

Description

Removs the graph from a page.

Arguments

No arguments

Return type

Returns true if the graph is successfully removed from the page else it would return false

Example

To remove the graph (g) from page with id (n):

g.RemoveFromPage(n);

Total() [static]

Description

Returns the total number of graphs.

Arguments

No arguments

Return type

integer

Example

To find how many graphs there are in T/HIS:

var num = Graph.Total();

Group class

The Group class gives you access to groups in T/HIS. More...

Class functions

- Get(Name[string])
 GetFromID(ID[integer])
- Total()

Member functions

- Add(Curve[Curve])
- AddAll()

- AddID(ID[integer])
 Contains(Curve[Curve])
 ContainsID(ID[integer])
- GetCurveIDs()

- GetCurves()
 Remove(Curve[Curve])
 RemoveAll()
 RemoveID(ID[integer])
- Spool()
- Spool()
 StartSpool()

Group properties

Name	Туре	Description
crv_at_ymax	integer	Curve number of the curve with the maximum Y value in the group.
crv_at_ymin	integer	Curve number of the curve with the minimum Y value in the group.
curves	integer	Number of curves in the group (read only)
name	string	Group name (read only)
x_at_ymax	real	X value at the maximum Y value over all curves in the group.
x_at_ymin	real	X value at the minimum Y value over all curves in the group.
x_at_yminpos	real	X value at the minimum positive Y value over all curves in the group.
xmax	real	Maximum X value over all curves in the group.
xmin	real	Minimum X value over all curves in the group.
xminpos	real	Minimum positive X value over all curves in the group.
ymax	real	Maximum Y value over all curves in the group.
ymin	real	Minimum Y value over all curves in the group.
yminpos	real	Minimum positive Y value over all curves in the group.

Detailed Description

The Group class allows you to create, and modify groups. See the documentation below for more details.

Constructor

new Group(name[string])

Description

Create a new Group object.

Arguments

Name	Type	Description
name	string	Group name used to reference the group

Return type

Group object

Example

To create a new group with the name X-Velocity

var l = new Group("X-velocity");

Details of functions

Add(Curve[Curve])

Description

Adds a curve object to group.

Arguments

Name	Type	Description
Curve	Curve	<u>Curve</u> that will be added to group

Return type

No return value.

Example

To add curve c to curve group g:

g.Add(c);

AddAII()

Description

Adds all curves to group.

Arguments

No arguments

Return type

No return value.

Example

To add all curves to curve group g:

g.AddAll();

AddID(ID[integer])

Description

Adds curve by ID to a group.

Arguments

Name	Type	Description
ID	integer	The ID of the curve you want to add.

Return type

No return value.

To add curve 3 to curve group g:

g.AddID(3);

Contains(Curve[Curve])

Description

Checks if a curve object is in a curve group.

Arguments

Name	Type	Description
Curve	Curve	Curve that will be checked

Return type

TRUE if the curve is in the group, otherwise FALSE

Example

To check if a curve object n is in group g

var exists = g.Contains(n);

ContainsID(ID[integer])

Description

Checks if a curve ID is in a curve group.

Arguments

Name	Type	Description
ID	integer	The ID of the curve you want to check.

Return type

TRUE if the curve is in the group, otherwise FALSE

Example

To check if a curve ID n is in group g

var exists = g.ContainsID(n);

Get(Name[string]) [static]

Description

Returns a group object.

Arguments

Name	Туре	Description
Name	string	Name of the group to return object for

Return type

Group object (or Null if the group does not exist).

To get the group called 'left'

```
var group = Group.Get("left");
```

GetCurveIDs()

Description

Returns an array of Curve ID's for all the Curves in the group.

Arguments

No arguments

Return type

Array of Curve ID's.

Example

To make an array of Curve ID's for all the curves in group g:

```
var curves = g.GetCurveIDs();
```

GetCurves()

Description

Returns an array of Curve Objects for all the Curves in the group.

Arguments

No arguments

Return type

Array of Curve objects.

Example

To make an array of Curve objects for all the curves in group g:

```
var curves = g.GetCurves();
```

GetFromID(ID[integer]) [static]

Description

Returns a group object.

Arguments

Name	Туре	Description
ID	integer	ID of the group to return object for

Return type

Group object (or Null if the group does not exist).

Example

To get the group number 1

```
var group = Group.GetFromID(1);
```

Remove(Curve[Curve])

Description

Removes a curve object from a group.

Arguments

Name	Type	Description
Curve	Curve	Curve that will be removed from group

Return type

No return value.

Example

To remove curve c from curve group g:

g.Remove(c);

RemoveAll()

Description

Removes all curves from a group.

Arguments

No arguments

Return type

No return value.

Example

To remove all curves from curve group g:

g.RemoveAll();

RemoveID(ID[integer])

Description

Remove a curve by from a group.

Arguments

Name	Type	Description
ID	integer	The ID of the curve you want to remove.

Return type

No return value.

Example

To remove curve 3 from curve group g:

g.RemoveID(3);

Spool()

Description

Spools a group, entry by entry and returns the curve objects. See also Group.StartSpool

No arguments

Return type

Curve Object of item, or NULL if no more curves in group

Example

```
To spool group g:
var id;
g.StartSpool();
while (id = g.Spool() )
{
    do something...
}
```

SpoolID()

Description

Spools a group, entry by entry and returns the curve ID's. See also Group.StartSpool

Arguments

No arguments

Return type

Curve ID, or 0 if no more curves in group

Example

```
To spool group g:
var id;
g.StartSpool();
while (id = g.SpoolID() )
{
    do something...
}
```

StartSpool()

Description

Starts a group spooling operation. See also **Group.Spool**

Arguments

No arguments

Return type

No return value

Example

To start spooling group g: g.StartSpool();

Total() [static]

Description

Returns the total number of curve group currently defined

No arguments

Return type

Number of curve groups currently defined.

Example

To get the number of curve groups

var total = Group.Total();

Include class

The Include class allows you to access the include files in a model. More...

Include constants

Constants for Directory separators

Name	Description
Include.NATIVE	Use directory separators native to this machine when writing directory names.
Include.UNIX	Use unix directory separators when writing directory names.
Include.WINDOWS Use windows directory separators when writing directory names.	

Detailed Description

The Include class allows to create and query include files in a model. This class was originally in PRIMER but has now been transferred to T/HIS and D3PLOT to allow consistency between the programs. See File.DriveMapFilename for the current use of this class.

LineStyle class

The LineStyle class contains constants relating to the curve line style. More...

LineStyle constants

Name	Description
LineStyle.DASH	Dashes lines
LineStyle.DASH2	Dash pattern 2
LineStyle.DASH3	Dash pattern 3
LineStyle.DASH4	Dash pattern 4
LineStyle.DASH5	Dash pattern 5
LineStyle.DASH6	Dash pattern 6
LineStyle.NONE	No line
LineStyle.SOLID	Solid lines

Detailed Description

The LineStyle class is used to define the line style used to draw curves:

p.style = LineStyle.SOLID;

LineWidth class

The LineWidth class contains constants relating to the curve line width. More...

LineWidth constants

Name	Description
LineWidth.BOLD	Bold lines (4 pixels wide)
LineWidth.FINE	Fine lines (1 pixel wide)
LineWidth.HEAVY	Heavy lines (8 pixels wide)
LineWidth.NORMAL	Normal lines (2 pixels wide)
LineWidth.W1-W10	Any width from 1-10 pixels

Detailed Description

The LineWidth class is used to define the line width used to draw curves:

p.width = LineWidth.NORMAL;

Model class

The Model class gives you access to models in T/HIS. More...

Class functions

- Exists(model number[integer])
- GetFromID(model number[integer])
- HighestID()
- Read(filename[string], filetype (optional)[integer])
- Total()

Member functions

- <u>ClearFlag</u>(flag[<u>Flag</u>], entity_type[<u>Entity Type</u>], item[integer], end (optional)[integer])
- Delete()
- FlagAll(flag[Flag], entity_type[Entity Type])
- Flagged(flag[Flag], entity_type[Entity Type], item[integer])
 GetDataFlagged(flag[Flag], data_comp[Data Component], int_pnt (optional)[integer or object], extra (optional)[integer])
- GetInternalID(entity_type[Entity Type], item[integer])
- GetLabel(entity_type[Entity Type], item[integer])
- GetLabelFromName(entity_type[Entity Type], name[string])
- GetName(entity_type[Entity Type], item[integer])
- GetNumberFlagged(flag[Flag], entity_type (optional)[Entity Type])
 GetNumberOf(entity_type[Entity Type])
- QueryDataPresent(data_comp[Data Component], entity_type (optional)[Entity Type], int_pnt (optional)[integer or object], extra (optional)[integer])
- <u>SetFlag(flag[Flag]</u>, entity_type[<u>Entity Type</u>], item[integer], end (optional)[integer])
- UnflagAll(flag[Flag], entity_type[Entity Type])

Model constants

Name Description	
Model.ALL_FILES Option to select all files (.thf, LSDA, ASCII, .ztf) when reading m	
Model.ASCII	Option to select ASCII files when reading model in.
Model.LSDA	Option to select LSDA/binout file when reading model in.
Model.THF	Option to select .thf/d3thdt file when reading model in.
Model.XTF	Option to select .xtf/xtfile file when reading model in.
Model.ZTF Option to select .ztf file when reading model in.	

Model properties

Name	Туре	Description	
dir	string	Directory containing the model file (read only).	
file	string	File selected when reading the model (read only).	
id	integer	Model ID (read only)	
title	string	Model title (read only).	

Detailed Description

The Model class contains information on filenames and directories belonging to a model. See the documentation below for more details.

Details of functions

ClearFlag(flag[Flag], entity_type[Entity Type], item[integer], end (optional)[integer])

Description

Clears a defined flag on an internal (or external) item(s) of type of entity_type in the model.

Name	Туре	Description	
flag	Flag	The flag you want to clear.	
entity_type	Entity Type	The entity type that the defined flag will be cleared on.	
item	integer	If +ive: The internal item number starting from 1. If -ive: The external item label.	
end (optional)	integer	To unflag range of items, specify an optional end of range. Unflags items from item to range.	

Return type

TRUE if the flag is successfully cleared on the item, otherwise FALSE

Example

```
To clear the flag f on the 6th node in model m:
```

```
m.ClearFlag(f, Entity.NODE, 6);
```

To clear the flag f on the Node 13456 in model m:

```
m.ClearFlag(f, Entity.NODE, -13456);
```

To clear the flag f on the first 10 nodes in model m:

```
m.ClearFlag(f, Entity.NODE, 1, 10);
```

To clear the flag f on nodes with labels 1000, 1001, 1002, ..., 1009 in model m:

```
m.ClearFlag(f, Entity.NODE, -1000, -1009);
```

Delete()

Description

Deletes a model

Do not use the Model object after calling this method.

Arguments

No arguments

Return type

TRUE if the model sucessfully deleted, otherwise FALSE

Example

To delete model m:

```
var deleted = m.Delete();
```

Exists(model number[integer]) [static]

Description

Checks if a model exists

Arguments

Name	Type	Description
model number	integer	The number of the model you want to check the existence of.

Return type

TRUE if the model exists, otherwise FALSE

To check if a model n exists

```
var exists = Model.Exists(n);
```

FlagAll(flag[<u>Flag</u>], entity_type[<u>Entity Type</u>])

Description

Sets a defined flag on all of items of type of entity_type in the model.

Arguments

Name	Туре	Description
flag	Flag	The flag you want to set.
entity_type	Entity Type	The entity type that the defined flag will be set on.

Return type

TRUE if the flag is successfully set on all the items, otherwise FALSE

Example

To set the flag f on all the nodes in model m:

```
m.FlagAll(f, Entity.NODE);
```

Flagged(flag[Flag], entity_type[Entity Type], item[integer])

Description

Checks if a defined flag is set on an internal (or external) item of type of entity_type in the model.

Arguments

Name	Туре	Description	
flag	Flag	The flag you want to check.	
entity_type	Entity Type	The entity type to check.	
item	integer	If +ive: The internal item number starting from 1. If -ive: The external item label.	

Return type

TRUE if the flag is set, FALSE if the flag is not set.

Example

To check if flag f is set on the 6th node in model m:

```
m.Flagged(f, Entity.NODE, 6);
```

To check if flag f is set on the Node 13456 in model m:

m.Flagged(f, Entity.NODE, -13456);

GetDataFlagged(flag[Flag], data_comp[Data Component], int_pnt (optional)[integer or object], extra (optional)[integer])

Description

Gets curve objects for a data component for relevant items that are flagged with a specified flag in the model. Some data components are valid for different entity types (e.g. SXX). If the same flag is set on items of different entity types, data is returned for all relevant, flagged entity types.

To return the same data for multiple items of the same type, it will be much faster if you flag all items you want data

for, and do a single call to GetDataFlagged().

Arguments

Name	Type	Description	
flag	Flag	The flag to use. For model data, use 0 to define a null "padding" argument.	
data_comp	Data Component	The data component to extract.	
int_pnt (optional)	integer or object	The integration points to extract. This argument is ignored when the entity type is not SOLID, SHELL, THICK_SHELL or BEAM. An integer specifies the integration point to extract: For SOLIDs: value between 0 for Average/Centre and 8. (Defaults to Average/Centre). For SHELLs and THICK_SHELLs: value between 1 and # integration points, or codes TOP, MIDDLE, BOTTOM. (Defaults to MIDDLE integration point). For integrated BEAMs: value between 1 and # integration points. (Defaults to integration point 1). An object {ip:1, op:2, np:3} can specify: • ip: The integration point. As described above. • op: The on-plan integration point. For SHELLs and THICK_SHELLs: value between 0 for Average/Centre and 4. (Defaults to Average/Centre). • np: The nodes to extrapolate to. For SOLIDs, SHELLs and THICK_SHELLs: value between 1 and # nodes on the entity. (Defaults to none). Not all of the arguments in the object need to be provided. Use 0 to define a null "padding" argument, then uses the default integration	
extra (optional)	integer	The extra component id for SOLIDs, SHELLs, THICK_SHELLs or BEAMs.	

Return type

Array of curve objects.

The curves are ordered by type, then by the ascending internal index of the items. Use <u>curve properties</u> to identify which curve is which. If the data is not available in the model for a flagged item, or not available for the selected integration points or extra value, a curve is not returned. You can use QueryDataPresent() to check if the data is available.

It is recommended that you check the number of curves returned. This can be compared with the number of flagged entities, see GetNumberFlagged().

If the data is generally available in the model, but not for the specific flagged item, a "null curve" which contains no x-y data values is returned. For example, a specific shell may have fewer integration points than MAX_INT for all shells, a "null curve" would be returned for the higher integration points.

```
To get X direct stress for flagged SOLIDs, SHELLs and THICK_SHELLs with flag f in model m:
```

```
var cur array = m.GetDataFlagged(f, Component.SXX);
```

To get X direct stress at top integration point for flagged SHELLs and THICK_SHELLs with flag f in model m:

```
var cur array = m.GetDataFlagged(f, Component.SXX, TOP);
```

To get X direct stress at top integration point, and on-plan integration point 3 for flagged SHELLs and THICK_SHELLs with flag f in model m:

```
var cur_array = m.GetDataFlagged(f, Component.SXX, {ip:TOP, op:3});
```

To get extra beam data 3 for flagged BEAMs with flag f in model m:

```
var cur array = m.GetDataFlagged(f, Component.BEX, 0, 3);
```

To get the total mass in model m:

```
var cur array = m.GetDataFlagged(0, Component.GMASS);
```

GetFromID(model number[integer]) [static]

Description

Returns the Model object for a model ID or null if model does not exist.

Arguments

Name	Type	Description
model number	integer	number of the model you want the Model object for

Return type

Model object (or null if model does not exist).

Example

To get the model n

```
var model = Model.GetFromID(n);
```

GetInternalID(entity_type[Entity Type], item[integer])

Description

Gets the internal ID of external item of type entity_type in the model.

Arguments

Name	Туре	Description	
entity_type	Entity Type	The entity type of the item.	
item integer		The external item number.	

Return type

Integer internal ID (starting from 1) with reference to the entity_type code.

Example

To get the internal ID of Airbag 300 in model m:

```
var x = m.GetInternalID(Entity.AIRBAG, 300);
```

GetLabel(entity_type[Entity Type], item[integer])

Description

Gets the external label of internal item of type entity_type in the model.

Arguments

Name	Type	Description	
entity_type	Entity Type	The entity type of the item.	
item	integer	The internal item number starting from 1.	

Return type

Integer external ID (or 0 if there is an error, or the internal ID if there are no external IDs).

Example

To get the external ID of the 2nd airbag in model m:

var x = m.GetLabel(Entity.AIRBAG, 2);

GetLabelFromName(entity_type[Entity Type], name[string])

Description

Gets the external label from the database history name name of type entity_type in the model. This is quicker if you use parent entity type codes (e.g. Entity.WELD rather than Entity.WELD_CONSTRAINED)

Arguments

Name	Type	Description
entity_type	Entity Type	The entity type of the item.
name	string	The name of the item. If only the first part of the name is given, it must be unambiguous.

Return type

Integer external ID of the first matching name (or 0 if there is an error).

Example

To get the external label the of Contact named "Rear Bolt" in database history:

```
var name = m.GetName(Entity.CONTACT, "Rear Bolt");
```

GetName(entity_type[Entity_Type], item[integer])

Description

Gets the database history name of an internal (or external) item of type entity_type in the model.

Arguments

Name	Type	Description
entity_type	Entity Type	The entity type of the item.
item	integer	If +ive: The internal item number starting from 1. If -ive: The external item label.

Return type

String containing the database history name (or null if not available).

To get the database history name of the 2nd airbag in model m:

```
var name = m.GetName(Entity.AIRBAG, 2);
```

To get the database history name of Airbag 300 in model m:

```
var name = m.GetName(Entity.AIRBAG, -300);
```

GetNumberFlagged(flag[Flag], entity_type (optional)[Entity Type])

Description

Gets the number of entities flagged with a requested flag in the model.

Arguments

Name	Туре	Description	
flag	Flag	The flag you want to check.	
entity_type (optional)	Entity Type	If specified, the entity type to look at. If not specified, all types are looked at.	

Return type

Integer number

Example

To get the number of airbag parts flagged with flag f in model m:

```
var num = m.GetNumberFlagged(f, Entity.AIRBAG_PART);
```

GetNumberOf(entity_type[Entity Type])

Description

Gets the number of entities of a requested type in the model.

Arguments

Name	Туре	Description	
entity_type	Entity Type	The entity type that you want to know the number of.	

Return type

Integer number

Example

To get the number of airbags in model m:

```
var num = m.GetNumberOf(Entity.AIRBAG);
```

HighestID() [static]

Description

Returns the ID of the highest model currently being used

Arguments

No arguments

Return type

ID of highest model currently being used.

To get the highest model ID

var id= Model.HighestID();

QueryDataPresent(data_comp[<u>Data Component</u>], entity_type (optional)[<u>Entity Type</u>], int_pnt (optional)[integer or object], extra (optional)[integer])

Description

Checks if a data component data_comp for a given entity is present in a model's database. For SOLIDs, SHELLs, THICK_SHELLs and BEAMs the integration point and extra component ID can also be checked. This will show if curves for any flagged items of this type will be returned for GetDataFlagged(). Note, it does not check if the data component is *valid*, for example a specific shell may have fewer integration points than MAX_INT for all shells, so curves returned for GetDataFlagged()) may still be "null" with no x-y data.

Arguments

Name	Туре	Description
data_comp	Data Component	The data component to check.
entity_type (optional)	Entity Type	The entity type to check. This argument can only be omitted when checking for global model data.
int_pnt (optional)	integer or object	The integration points to check. This argument is ignored if the entity type is not SOLID, SHELL, THICK_SHELL or BEAM. An integer specifies the integration point to check: For SOLIDs: value between 0 for Average/Centre and 8. (Defaults to Average/Centre). For SHELLs and THICK_SHELLs: value between 1 and # integration points, or codes TOP, MIDDLE, BOTTOM. (Defaults to MIDDLE integration point). For integrated BEAMs: value between 1 and # integration points. (Defaults to integration point 1). An object {ip:1, op:2, np:3} can specify: • ip: The integration point. As described above. • op: The on-plan integration point. For SHELLs and THICK_SHELLs: value between 0 for Average/Centre and 4. (Defaults to Average/Centre). • np: The nodes to extrapolate to. For SOLIDs, SHELLs and THICK_SHELLs: value between 1 and # nodes on the entity. (Defaults to none). Not all of the arguments in the object need to be provided. If multiple arguements are provided, QueryDataPresent() will only return JS_TRUE if all curves are valid. Use 0 to define a null "padding" argument, then checks the default integration
extra (optional)	integer	The extra component id for SOLIDs, SHELLs, THICK_SHELLs or BEAMs.

Return type

JS_TRUE if data is present, otherwise JS_FALSE.

```
To check for X direct stress data for SOLIDs in model m:
```

```
if(m.QueryDataPresent(Component.SXX, Entity.SOLID)) ...
```

To check for X direct stress data at integration point 5 for SHELLs in model m:

```
if(m.QueryDataPresent(Component.SXX, Entity.SHELL, 5)) ...
```

To check for X direct stress data at both the top integration point, and also extrapolated to node 3 for SHELLs in model m.

```
if(m.QueryDataPresent(Component.SXX, Entity.SHELL, {ip:TOP, np:3}) ...
```

To check for extra 3 beam data for BEAMs in model m:

```
if(m.QueryDataPresent(Component.BEX, Entity.BEAM, 0, 3);
```

To check for total mass data in model m:

if (m.QueryDataPresent(Component.GMASS));

Read(filename[string], filetype (optional)[integer]) [static]

Description

Reads in a new model.

Arguments

Name	Туре	Description
filename	string	Filename you want to read.
filetype (optional)		Filetypes you want to read. Can be bitwise OR of Model.THF, Model.XTF, Model.LSDA, Model.ASCII, Model.ZTF and Model.ALL_FILES. If omitted all available files will be read.

Return type

Model object (or null if error).

Example

To read in model /data/test/file.thf:

```
var m = Model.Read("/data/test/file.thf");
```

To read in model /data/test/file.thf only with .ztf files:

```
var m = Model.Read("/data/test/file.thf", Model.ZTF);
```

To read in model /data/test/file.thf only with .thf, .ascii and .ztf files:

```
var m = Model.Read("/data/test/file.thf", Model.THF | Model.ASCII | Model.ZTF);
```

SetFlag(flag[Flag], entity_type[Entity Type], item[integer], end (optional)[integer])

Description

Sets a defined flag on an internal (or external) item(s) of type of entity_type in the model.

Arguments

Name	Туре	Description
flag	Flag	The flag you want to set.
entity_type	Entity Type	The entity type that the defined flag will be set on.
item	integer	If +ive: The internal item number starting from 1. If -ive: The external item label.
end (optional)	integer	To flag range of items, specify an optional end of range. Flags items from item to range.

Return type

TRUE if the flag is successfully set on the item, otherwise FALSE

Example

```
To set the flag f on the 6th node in model m:

m.SetFlag(f, Entity.NODE, 6);

To set the flag f on the Node 13456 in model m:

m.SetFlag(f, Entity.NODE, -13456);

To set the flag f on the first 10 nodes in model m:

m.SetFlag(f, Entity.NODE, 1, 10);

To set the flag f on nodes with labels 1000, 1001, 1002, ..., 1009 in model m:

m.SetFlag(f, Entity.NODE, -1000, -1009);
```

Total() [static]

Description

Returns the total number of models.

Arguments

No arguments

Return type

integer

Example

To find how many models there are in T/HIS:

```
var num = Model.Total();
```

UnflagAll(flag[<u>Flag</u>], entity_type[<u>Entity Type</u>])

Description

Unsets a defined flag flag on all of items of type of entity_type in the model.

Arguments

Name	Туре	Description	
flag	Flag	The flag you want to unset.	
entity_type	Entity Type	The entity type that the defined flag will be unset on.	

Return type

TRUE if the flag is successfully unset on all the items, otherwise FALSE

Example

To unset the flag f on all the nodes in model m:

```
m.UnflagAll(f, Entity.NODE);
```

Operate class

The Operate class gives you access to the built in curve operations in T/HIS. More...

Class functions

- Abs(Input Curve/Curve), Output Curve (optional)[Curve])
- Acos(Input Curve], Output Curve (optional)[Curve])

- Acu(Input Curve[Curve], Offset[real], Time Period[real], Output Curve (optional)[Curve])

 Add(Input Curve[Curve], Output Curve (optional)[Curve])

 Add(Input Curve[Curve], 2nd Curve or constant[Curve] or real], Output Curve (optional)[Curve])
- Adx(1st Curve [Curve], 2nd Curve or constant [Curve], Output Curve (optional) [Curve])

 Asi(X Acceleration [Curve], Y Acceleration [Curve], Z Acceleration [Curve], Acceleration factor[real], X Acceleration Limit[real], Y Acceleration Limit[real], Z Acceleration Limit[real], Calculation method[string], X axis interval (optional)[real], Output Curve (optional)[Curve])
- <u>Asin</u>(Input Curve[<u>Curve</u>], Output Curve (optional)[<u>Curve</u>])
- Atan(Input Curve[<u>Curve</u>], Output Curve (optional)[<u>Curve</u>])
- Atan2(1st Input Curve[Curve], 2nd Input Curve[Curve], Output Curve (optional)[Curve])

 Av(Input Curve[Curve], Output Curve (optional)[Curve])

 Ave(Curves[Array of Curve objects], Output Curve (optional)[Curve])

- Blc(Input Curve/Curve/)
- But(Input Curve Curve), Frequency [real], Order [integer], X axis interval (optional) [real], Output Curve (optional)[Curve])
- C1000(Input Curve/Curve/, X axis interval (optional)/real/, Output Curve (optional)/Curve/)
- C180(Input Curve [Curve], X axis interval (optional)[real], Output Curve (optional)[Curve])
- C60(Input Curve [Curve], X axis interval (optional)[real], Output Curve (optional)[Curve])
- C600(Input Curve [Curve], X axis interval (optional)[real], Output Curve (optional)[Curve])
- Cat(1st Curve[Curve], 2nd Curve[Curve or real], Output Curve (optional)[Curve])
 Clip(Input Curve[Curve], X min[real], X max[real], Y min[real], Y max[real], Output Curve (optional)[Curve])

- Com(1st Curve[Curve], 2nd Curve[Curve] or real], Output Curve (optional)[Curve])
 Cor(1st Curve[Curve], 2nd Curve[Curve], Correlation type[string])
 Cor3(1st Curve[Curve], 2nd Curve[Curve], X axis factor (optional)[real], Y axis factor (optional)[real])
- Cos(Input Curve [Curve], Output Curve (optional)[Curve])
- Da(Input Curve [Curve], Output Curve (optional)[Curve])
- Dif(Input Curve [Curve], Output Curve (optional)[Curve])
- Div(1st Curve[Curve], 2nd Curve or constant[Curve or real], Output Curve (optional)[Curve])
 Dix(1st Curve[Curve], 2nd Curve or constant[Curve or real], Output Curve (optional)[Curve])
- Ds(Input Curve[Curve], Broadening Factor[real], Redefine Frequencies[string], Output Curve
- <u>Dv</u>(Input <u>Curve</u>], Output Curve (optional)[<u>Curve</u>])
- Env(Curves[Array of Curve objects], Output Curve (optional)[Curve])
- Err(1st Curve[Curve], 2nd Curve[Curve or real], Output Curve (optional)[Curve])
- Exc(Input Curve [Curve], Output option[string], Output Curve (optional)[Curve])
- Exp(Input Curve[Curve], Output Curve (optional)[Curve])
- Fft(Input Curve/Curve), Output option/string), X axis interval (optional)/real], Scaling option (optional)[string])
- Fir(Input Curve[Curve], X axis interval (optional)[real], Output Curve (optional)[Curve])
- Hic(Input Curve [Curve], Window [real], Acceleration factor [real])
- Hicd(Input Curve[Curve], Window[real], Acceleration factor[real])
- <u>Ifft(1st Curve[Curve], 2nd Curve[Curve]</u>, Input type[string]) <u>Int(Input Curve[Curve]</u>, Output Curve (optional)[Curve])
- Log(Input Curve[Curve], Output Curve (optional)[Curve])
- <u>Log10</u>(Input Curve[<u>Curve</u>], Output Curve (optional)[<u>Curve</u>])
- Log10x(Input Curve [Curve], Output Curve (optional) [Curve])
 Logx(Input Curve [Curve], Output Curve (optional) [Curve])
 Lsq(Input Curve [Curve], Output Curve (optional) [Curve])

- Map(1st Curve[Curve], 2nd Curve[Curve or real], Output Curve (optional)[Curve])

 Max(Curves[Array of Curve objects], Output Curve (optional)[Curve])
- Min(Curves/Array of Curve objects), Output Curve (optional)[Curve])
- Mon(Input Curve [Curve], Output Curve (optional)[Curve])
- <u>Mul</u>(1st Curve[Curve], 2nd Curve or constant[Curve or real], Output Curve (optional)[Curve])
- Mux(1st Curve[Curve], 2nd Curve or constant[Curve] or real], Output Curve (optional)[Curve])
- Ncp(1st Curve [Curve], 2nd Curve [Curve])
 Nij(Shear Force [Curve], Axial Force [Curve], Moment [Curve], Fzc(tension)[real], Fzc(compression)[real], Myc(Flexion)[real], Myc(Extension)[real], E[real])
- Nor(Input Curve[Curve], Output Curve (optional)[Curve])
- Nor2(Input Curve[Curve], Y Min Value[real], Y Max Value[real], Lock to Axis (Y Min)[integer], Lock to Axis (Y Max)/integer], Output Curve (optional)/Curve)
- Nox(Input Curve [Curve], Output Curve (optional)[Curve])
- Nox2(Input Curve Curve , X Min Value real), X Max Value real], Lock to Axis (X Min) integer], Lock to

- Axis (X Max)[integer], Output Curve (optional)[Curve])
- Octave(Input Curve Curve), Band type to convert to String, Output Type String, Input Type String, Output Curve (optional)[Curve])
- Order(Input Curve[Curve], Output Curve (optional)[Curve])
- Pbut(Input Curve/Curve), Frequency/real), Order/integer, X axis interval (optional)/real), Output Curve (optional)[Curve])
- Power(Input Curve [Curve], Power[real], Output Curve (optional)[Curve])
 Rave(Input Curve [Curve], Output Curve (optional)[Curve])
- Rec(Input Curve/Curve), Output Curve (optional) (Curve)
- Reg(Input Curve Curve), X axis interval [real], Output Curve (optional) [Curve])
- Res(Curves[Array of Curve objects], Output Curve (optional)[Curve])
- Rev(Input Curve[Curve], Output Curve (optional)[Curve])
 Rs(Input Curve[Curve], Damping Factor[real], Sampling Points[int], X axis interval (optional)[real], Output Curve (optional)[Curve])
- Sin(Input Curve[Curve], Output Curve (optional)[Curve])
 Smooth(Input Curve[Curve], Smoothing Factor[integer], Output Curve (optional)[Curve])
 Sqr(Input Curve[Curve], Output Curve (optional)[Curve])

- Stress(Input Curve[Curve], Convert to[string], Output Curve (optional)[Curve])
 Sub(1st Curve[Curve], 2nd Curve or constant[Curve or real], Output Curve (optional)[Curve])
- Sum(Curves[Array of Curve objects], Output Curve (optional)[Curve])
- Sux(1st Curve/Curve), 2nd Curve or constant/Curve or real], Output Curve (optional)[Curve])
- Tan(Input Curve[Curve], Output Curve (optional)[Curve])
- Thiv(X Acceleration[Curve], Y Acceleration[Curve], Yaw Rate[Curve], Dx[real], Dy[real], X0[real])
- Tms(Input Curve[Curve], Period[real])
- Translate(Input Curve], X value[real], Y value[real], Output Curve (optional)[Curve])

 <u>Tti(Upper Rib Acceleration[Curve]</u>, Lower Rib Acceleration[<u>Curve</u>], T12 Acceleration[<u>Curve</u>])
- Va(Input Curve[Curve], Output Curve (optional)[Curve])

- Vc(Input Curve[Curve], A[real], B[real], Calculation method[string], Output Curve (optional)[Curve])
 Vd(Input Curve[Curve], Output Curve (optional)[Curve])
 Vec(1st Curve[Curve], 2nd Curve[Curve or real], 3rd Curve[Curve or real], Output Curve (optional)[Curve])
 Vec(2d(1st Curve[Curve], 2nd Curve[Curve or real], Output Curve (optional)[Curve])
- Wif(1st Curve/Curve), 2nd Curve/Curve))
- Window(Input Curve/Curve), Window Type/string), percentage lead in (optional)/real), Output Curve (optional)[<u>Curve</u>])
- Zero(Input Curve [Curve], Output Curve (optional)[Curve])
- ZeroX(Input Curve [Curve], Output Curve (optional)[Curve])
- ZeroY(Input Curve[Curve], Output Curve (optional)[Curve])
- dB(Input Curve [Curve], Reference Value [real], Output Curve (optional) [Curve])
- dBA(Input Curve/Curve), Weighting Type/String), Output Curve (optional)/Curve)

Detailed Description

The Operate class allows you to use the built in curve operations in T/HIS to generate new curves. Most of the curve operations generate a new curve and return the curve object for the new curve. A few functions (NIJ, FFT, etc) generate multiple output curves and these return an array of curve objects. See the documentation below for more details.

Details of functions

Abs(Input Curve/Curve), Output Curve (optional)/Curve) [static]

Description

Convert a curve to absolute values

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

To convert curve m to absolute values and store as curve p

p = Operate.Abs(m);

Acos(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Calculate Arc Cosine

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Calculate Arc Cosine() of curve m and store as curve p

p = Operate.Acos(m);

Acu(Input Curve[Curve], Offset[real], Time Period[real], Output Curve (optional)[Curve]) [static]

Description

Evaluates the integratal of a curve over a user defined period

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Offset	real	User defined offset
Time Period	real	Time to integrate over
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Integrate c curve over 0.07 seconds with a 0.1 offset.

p = Operate.Acu(m, 0.1, 0.007);

Ad(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Convert acceleration spectrum to a displacment spectrum

Name	Type	Description
Input Curve	Curve	Input Curve
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Convert curve m and store as curve p

p = Operate.Ad(m);

Add(Input Curve[Curve], 2nd Curve or constant[Curve or real], Output Curve (optional)[Curve]) [static]

Description

Add Y axis values

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
2nd Curve or constant	Curve or real	2nd <u>Curve</u> or constant
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

To add curves m and n together and store as curve p

p = Operate.Add(m,n);

To add 20.0 to the values in curve m and store as curve p

p = Operate.Add(m,20.0);

Adx(1st Curve[Curve], 2nd Curve or constant[Curve or real], Output Curve (optional)[Curve]) [static]

Description

Add X axis values

Arguments

Name	Туре	Description
1st Curve	Curve	1st <u>Curve</u>
2nd Curve or constant	Curve or real	2nd <u>Curve</u> or constant
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

To add X axis values for curves m and n together and store as curve p

p = Operate.Adx(m,n);

To add 20.0 to the X axis values in curve m and store as curve p

p = Operate.Adx(m, 20.0);

Asi(X Acceleration[Curve], Y Acceleration[Curve], Z Acceleration[Curve], Acceleration conversion factor[real], X Acceleration Limit[real], Y Acceleration Limit[real], Z Acceleration Limit[real], Calculation method[string], X axis interval (optional)[real], Output Curve (optional)[Curve]) [static]

Description

Acceleration Severity Index. This value is used to assess the performance of road side crash barriers. The calculation method can be set to 2010 (BS EN 1317-1:2010) or 1998 (BS EN 1317-1:1998).

Arguments

Name	Type	Description
X Acceleration	Curve	X Acceleration Curve
Y Acceleration	Curve	Y Acceleration Curve
Z Acceleration	Curve	Z Acceleration <u>Curve</u>
Acceleration conversion factor	real	Factor required to divide input acceleration curve by to convert to (G)
X Acceleration Limit	real	X direction acceleration limit
Y Acceleration Limit	real	Y direction acceleration limit
Z Acceleration Limit	real	Z direction acceleration limit
Calculation method	string	Either 2010 or 1998.
X axis interval (optional)	real	If defined then T-HIS will automatically regularise the curve using this value first
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Calculate ASI using the 2010 method with input curves x,y and z, factors 12,9,10 and a conversioon factor of 9810. Regularise the input curves using an interval of 0.0001 first.

p = Operate.Asi(x, y, z, 9810.0, 12.0, 9.0, 10.0, "2010", 0.0001);

Asin(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Calculate Arc Sine

Arguments

Name	Type	Description
Input Curve	Curve	Input Curve
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Calculate Arc Sine() of curve m and store as curve p

p = Operate.Asin(m);

Atan(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Calculate Arc Tangent

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Calculate Arc Tangent() of curve m and store as curve p

p = Operate.Atan(m);

Atan2(1st Input Curve[Curve], 2nd Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Calculate Arc Tangent using atan2(y, x)

Arguments

Name	Type	Description
1st Input Curve	Curve	Input <u>Curve</u>
2nd Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Calculate Arc Tangent() of curve m / curve n and store as curve p

p = Operate.Atan2(m, n);

Av(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Convert acceleration spectrum to a velocity spectrum

Name	Type	Description
Input Curve	Curve	Input Curve
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Convert curve m and store as curve p

```
p = Operate.Av(m);
```

Ave(Curves[Array of Curve objects], Output Curve (optional)[Curve]) [static]

Description

Average a group of curves

Arguments

Name	Туре	Description
Curves	Array of Curve objects	Array of <u>Curve</u> objects
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Average the array of curves stored in curve array x and store as curve p

```
p = Operate.Ave(x);
```

Blc(Input Curve[Curve]) [static]

Description

Carry out a baseline correction on an accleration time history

Arguments

Name	Type	Description
Input Curve	Curve	Moment / Time <u>Curve</u>

Return type

Array of Curve objects. 1st curve : Corrected curve 2nd curve : Integrated Velocity 3rd curve : Integrated Displacement

Example

Calculate baseline correction on curve m, .

```
c_array = Operate.Blc(m);
corrected_curve = c_array[0];
vel_curve = c_array[1];
disp_curve = c_array[2];
```

But(Input Curve[Curve], Frequency[real], Order[integer], X axis interval (optional)[real], Output Curve (optional)[Curve]) [static]

Description

Butterworth Filter

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Frequency	real	Cut-off Frequency (Hz)
Order	integer	Filter order
X axis interval (optional)	real	If defined then T-HIS will automatically regularise the curve using this value first
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Filter curve m using a cut-off of 400 Hz and order 2 and output as curve p . Regularise the input curve using an interval of 0.0001 first.

p = Operate.But(m, 400.0, 2, 0.0001);

C1000(Input Curve[Curve], X axis interval (optional)[real], Output Curve (optional)[Curve]) [static]

Description

SAE Class 1000 Filter

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
X axis interval (optional)	real	If defined then T-HIS will automatically regularise the curve using this value first
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Filter curve m and output as curve p . Regularise the input curve using an interval of 0.0001 first.

p = Operate.C1000(m, 0.0001);

C180(Input Curve[Curve], X axis interval (optional)[real], Output Curve (optional)[Curve]) [static]

Description

SAE Class 180 Filter

Name	Type	Description
Input Curve	Curve	Input Curve
X axis interval (optional)	real	If defined then T-HIS will automatically regularise the curve using this value first
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Filter curve m and output as curve p. Regularise the input curve using an interval of 0.0001 first.

p = Operate.C180(m, 0.0001);

C60(Input Curve[Curve], X axis interval (optional)[real], Output Curve (optional)[Curve]) [static]

Description

SAE Class 60 Filter

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
X axis interval (optional)	real	If defined then T-HIS will automatically regularise the curve using this value first
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Filter curve m and output as curve p. Regularise the input curve using an interval of 0.0001 first.

p = Operate.C60(m, 0.0001);

C600(Input Curve[Curve], X axis interval (optional)[real], Output Curve (optional)[Curve]) [static]

Description

SAE Class 600 Filter

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
X axis interval (optional)	real	If defined then T-HIS will automatically regularise the curve using this value first
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Filter curve m and output as curve p. Regularise the input curve using an interval of 0.0001 first.

p = Operate.C600(m, 0.0001);

Cat(1st Curve[Curve], 2nd Curve[Curve] or real], Output Curve (optional)[Curve]) [static]

Description

Concatenate 2 curves together

Arguments

Name	Type	Description
1st Curve	Curve	1st <u>Curve</u>
2nd Curve	Curve or real	2nd Curve
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

To concatenate the values for curve n to those in curve m and store as curve p

p = Operate.Cat(m,n);

Clip(Input Curve[Curve], X min[real], X max[real], Y min[real], Y max[real], Output Curve (optional)[Curve]) [static]

Description

Clip a curve

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
X min	real	X minimum value
X max	real	X maximum value
Y min	real	Y minimum value
Y max	real	Y maximum value
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Clip a curve m to within 0.1<x<0.3, 0.0<y<100.0 and store as curve p

p = Operate.Clip(m,0.1,0.3,0.0,100.0);

Com(1st Curve[Curve], 2nd Curve[Curve or real], Output Curve (optional)[Curve]) [static]

Description

Combine Y axis values from 2 curves together

Name	Туре	Description
1st Curve	Curve	1st <u>Curve</u>
2nd Curve	Curve or real	2nd Curve
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

To combine the Y axis values for curve n to those in curve m and store as curve p

p = Operate.Com(m,n);

Cor(1st Curve[Curve], 2nd Curve[Curve], Correlation type[string]) [static]

Description

Curve Correlation function. This Correlation function provides a measure of the degree to which two curves match. When comparing curves by eye, the quality of correlation may be judged on the basis of how well matched are the patterns of peaks, the overall shapes of the curves, etc, and can allow for differences of timing as well as magnitude. Thus a simple function based on the difference of Y-values (such as T/HIS ERR function) does not measure correlation in the same way as the human eye. The T/HIS correlation function attempts to include and quantify the more subtle ways in which the correlation of two curves may be judged.

The correlation can be calculated using either a strict or loose set of input parameters.

The degree of correlation is rated between 0 and 100.

Arguments

Name	Type	Description	
1st Curve	Curve	1st <u>Curve</u>	
2nd Curve	Curve	2nd Curve	
Correlation type	string	Correlation type, strict or loose	

Return type

Correlation value.

Example

Calculate the correlation between curves m and n using the strict input parameters.

val = Operate.Cor(m,n,"strict");

Cor3(1st Curve[Curve], 2nd Curve[Curve], X axis factor (optional)[real], Y axis factor (optional)[real]) [static]

Description

Curve Correlation function. This function first normalises the curves using two factors either specified by the user or defaults calculated by the program (the maximum absolute X and Y values of both graphs). For each point on the first normalised curve, the shortest distance to the second normalised curve is calculated. The root mean square value of all these distances is subtracted from 1 and then multiplied by 100 to get an index between 0 and 100. The process is repeated along the second curve and the two indices are averaged to get a final index. The higher the index the closer the correlation between the two curves.

Note that the choice of normalising factors is important. Incorrect factors may lead to a correlation index outside the range of 0 to 100

Name	Type	Description		
1st Curve	Curve	1st <u>Curve</u>		
2nd Curve	Curve	2nd <u>Curve</u>		
X axis factor (optional)	real	Normalising factor used for X axis values		
Y axis factor (optional)	real	Normalising factor used for Y axis values		

Return type

Correlation value.

Example

Calculate the correlation between curves m and n using the default normalising factors.

```
val = Operate.Cor3(m,n);
```

Calculate the correlation between curves m and n using 0.1 and 1000.0 as the X and Y normalising factors.

val = Operate.Cor3(m,n,0.1,1000);

Cos(Input Curve], Output Curve (optional)[Curve]) [static]

Description

Calculate Cosine

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Calculate Cosine() of curve m and store as curve p

p = Operate.Cos(m);

Da(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Convert displacment spectrum to an acceleration spectrum

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Convert curve m and store as curve p

p = Operate.Da(m);

Dif(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Differentiate a curve

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

To differentiate curve m and store as curve p

p = Operate.Dif(m);

Div(1st Curve[Curve], 2nd Curve or constant[Curve or real], Output Curve (optional)[Curve]) [static]

Description

Divide Y axis values

Arguments

Name	Type	Description
1st Curve	Curve	1st <u>Curve</u>
2nd Curve or constant	Curve or real	2nd <u>Curve</u> or constant
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

To divide the Y axis values for curve n by curve m and store as curve p

p = Operate.Div(m,n);

To devide the Y axis values in curve m by 20.0 and store as curve p

p = Operate.Div(m, 20.0);

Dix(1st Curve[Curve], 2nd Curve or constant[Curve or real], Output Curve (optional)[Curve]) [static]

Description

Divide X axis values

Name	Type	Description
1st Curve	Curve	1st <u>Curve</u>
2nd Curve or constant	Curve or real	2nd <u>Curve</u> or constant
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

To divide the X axis values for curve n by curve m and store as curve p

p = Operate.Dix(m,n);

To devide the X axis values in curve m by 20.0 and store as curve p

p = Operate.Dix(m, 20.0);

Ds(Input Curve[<u>Curve</u>], Broadening Factor[<u>real</u>], Redefine Frequencies[<u>string</u>], Output Curve (optional)[<u>Curve</u>]) [static]

Description

Generate a design spectrum from a reponse spectrum

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Broadening Factor	real	Spectrum broadening factor
Redefine Frequencies	string	T-HIS selects a new set of frequencies for the output (yes or no)
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Convert curve m and let T-HIS determine the new frequencies, store as curve p

p = Operate.Ds(m, "yes");

Dv(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Convert displacment spectrum to a velocity spectrum

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Convert curve m and store as curve p

p = Operate.Dv(m);

Env(Curves[Array of Curve objects], Output Curve (optional)[Curve]) [static]

Description

Generate an Envelope that bounds the min and max values of a group of curves

Arguments

Name	Туре	Description
Curves	Array of Curve objects	Array of <u>Curve</u> objects
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Envelope of curves stored in curve array x and store as curve p

p = Operate.Env(x);

Err(1st Curve[Curve], 2nd Curve[Curve or real], Output Curve (optional)[Curve]) [static]

Description

Calculate the degree of correlation between 2 curves

Arguments

Name	Туре	Description
1st Curve	Curve	1st <u>Curve</u>
2nd Curve	Curve or real	2nd Curve
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

To calculate the correlation between curves n and m and store as curve p

p = Operate.Err(m,n);

Exc(Input Curve[Curve], Output option[string], Output Curve (optional)[Curve]) [static]

Description

Calculate and displays an EXCeedence plot. This is a plot of force (Y axis) versus cumulative time (X axis) for which the force level has been exceeded. By default the Automatic option will create an exceedence plot using either the +ve OR the -ve values depending on which the input curve contains most of.

The Positive option will calculate the exceedence plot using only the points with +ve y values.

The Negative option will calculate the exceedence plot using only the points with -ve y values.

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output option	string	Select between automatic, positive or negative.
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Calculate Exceedence plot for curve m, using the positive option and store as curve p

p = Operate.Exc(m, "positive");

Exp(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Calculate E to the power of Y axis values

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Calculate E to the power of Y axis values for curve m and store as curve p

p = Operate.Exp(m);

Fft(Input Curve[<u>Curve</u>], Output option[string], X axis interval (optional)[real], Scaling option (optional)[string]) [static]

Description

Fast Fourier Transform

Arguments

Name	Туре	Description
Input Curve	Curve	Input <u>Curve</u>
Output option		Generate magnitude, magnitude+phase or real+imaginary, (one of magnitude,phase,real)
X axis interval (optional)	real	If defined then T-HIS will automatically regularise the curve using this value first
Scaling option (optional)	string	Scaling option, (either one or two)

Return type

Curve object/array or NULL

Generate magnitude and phase curves and return a curve array. Regularise the input curve using an interval of 0.0001 first and scale using option two.

```
c_array = Operate.Fft(m,"phase",0.0001,"one");
mag_curve = c_array[0];
phase curve = c array[1];
```

Fir(Input Curve/Curve), X axis interval (optional)/real/, Output Curve (optional)/Curve)) [static]

Description

FIR Filter

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
X axis interval (optional)	real	If defined then T-HIS will automatically regularise the curve using this value first
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Filter curve m and output as curve p. Regularise the input curve using an interval of 0.0001 first.

```
p = Operate.Fir(m, 0.0001);
```

Hic(Input Curve[Curve], Window[real], Acceleration factor[real]) [static]

Description

HIC Calculation. After calculating the HIC value for a curve the value can also be obtained from the curve using the Curve.hic property. In addition to the HIC value the start and end time for the time window can also be obtained using the Curve.hic_tmin and Curve.hic_tmin properties.

Arguments

Name	Type	Description
Input Curve	Curve	Input Curve
Window	real	Maximum time window
Acceleration factor	real	Factor required to divide input acceleration curve by to convert to (G)

Return type

HIC value.

Example

Calculate HIC for curve m, using a window of 0.036s and a factor of 9810.

```
val = Operate.Hic(m, 0.036, 9810.0);
```

Hicd(Input Curve[Curve], Window[real], Acceleration factor[real]) [static]

Description

Modified HIC(d) Calculation for free motion headform. After calculating the HIC value for a curve the value can also be obtained from the curve using the <u>Curve.hicd</u> property. In addition to the HIC(d) value the start and end time for the time window can also be obtained using the <u>Curve.hicd_tmin</u> and <u>Curve.hicd_tmax</u> properties.

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Window	real	Maximum time window
Acceleration factor	real	Factor required to divide input acceleration curve by to convert to (G)

Return type

HIC(d) value.

Example

Calculate HIC(d) for curve m, using a window of 0.036s and a factor of 9810.

val = Operate.Hicd(m, 0.036, 9810.0);

Ifft(1st Curve[Curve], 2nd Curve[Curve], Input type[string]) [static]

Description

Inverse Fast Fourier Transform

Arguments

Name	Type	Description
1st Curve	Curve	1st <u>Curve</u>
2nd Curve	Curve	2nd <u>Curve</u>
Input type	string	Specifies if inputs are magnitude+phase or real+imaginary, (magnitude or real)

Return type

Curve object or NULL

Example

Generate curve from magnitude (m) and phase (p) data and return as curve q.

q = Operate.Ifft(m,p,"magnitude");

Int(Input Curve/Curve), Output Curve (optional)/Curve)) [static]

Description

Integrate a curve

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

To integrate curve m and store as curve p

p = Operate.Int(m);

Log(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Calculate Natural Log of Y axis values

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Calculate Natural Log of Y axis values for curve m and store as curve p

p = Operate.Log(m);

Log10(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Calculate Log (base 10) of Y axis values

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Calculate Log (base 10) of Y axis values for curve m and store as curve p

p = Operate.Log10(m);

Log10x(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Calculate Log (base 10) of X axis values

Name	Type	Description
Input Curve	Curve	Input Curve
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Calculate Log (base 10) of X axis values for curve m and store as curve p

p = Operate.Log10x(m);

Logx(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Calculate Natural Log of X axis values

Arguments

Name	Type	Description
Input Curve	Curve	Input Curve
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Calculate Natural Log of X axis values for curve m and store as curve p

p = Operate.Logx(m);

Lsq(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Calculate Least Squares Fit for a curve

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

To calculate Least Squares Fit for curve m and store as curve p

p = Operate.Lsq(m);

Map(1st Curve[Curve], 2nd Curve[Curve or real], Output Curve (optional)[Curve]) [static]

Description

Map Y axis values from one curve onto another curve

Arguments

Name	Туре	Description
1st Curve	Curve	1st <u>Curve</u>
2nd Curve	Curve or real	2nd Curve
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

To map curve n onto curve m and store as curve p

p = Operate.Map(m,n);

Max(Curves[Array of Curve objects], Output Curve (optional)[Curve]) [static]

Description

Maximum of a group of curves

Arguments

Name	Туре	Description
Curves	Array of Curve objects	Array of <u>Curve</u> objects
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Maximum of curves stored in curve array x

p = Operate.Max(x);

Min(Curves[Array of Curve objects], Output Curve (optional)[Curve]) [static]

Description

Minimum of a group of curves

Arguments

Name	Туре	Description
Curves	Array of Curve objects	Array of <u>Curve</u> objects
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Minimum of curves stored in curve array x

p = Operate.Min(x);

Mon(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Sort a curve into monotonically increasing X axis values.

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

To sort curve m and store as curve p

p = Operate.Mon(m);

Mul(1st Curve[Curve], 2nd Curve or constant[Curve or real], Output Curve (optional)[Curve]) [static]

Description

Multiply Y axis values

Arguments

Name	Type	Description
1st Curve	Curve	1st <u>Curve</u>
2nd Curve or constant	Curve or real	2nd <u>Curve</u> or constant
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

To multiply the Y axis values for curve n from m and store as curve p

p = Operate.Mul(m,n);

To multiply the Y axis values in curve m by 20.0 and store as curve p

p = Operate.Mul(m, 20.0);

Mux(1st Curve[Curve], 2nd Curve or constant[Curve or real], Output Curve (optional)[Curve]) [static]

Description

Multiply X axis values

Name	Туре	Description
1st Curve	Curve	1st <u>Curve</u>
2nd Curve or constant	Curve or real	2nd <u>Curve</u> or constant
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

To multiply the X axis values for curve n from m and store as curve p

p = Operate.Mux(m,n);

To multiply the X axis values in curve m by 20.0 and store as curve p

p = Operate.Mux(m, 20.0);

Ncp(1st Curve[Curve], 2nd Curve[Curve]) [static]

Description

Calculate a platic rotation curve for a beam from a moment/time and rotation/time

Arguments

Name	Type	Description
1st Curve	Curve	Moment / Time Curve
2nd Curve	Curve	Rotation /Time Curve

Return type

Curve object or NULL

Example

Calculate plastic rotation curve p using curves m and r.

q = Operate.Ncp(m,r);

Nij(Shear Force[Curve], Axial Force[Curve], Moment[Curve], Fzc(tension)[real], Fzc(compression)[real], Myc(Flexion)[real], E[real]) [static]

Description

Biomechanical neck injury predictor. Used as a measure of injury due to the load transferred through the occipital

This function returns an array containing 4 curve objects.

Curve 1 - "Nte" is the tension-extension condition

Curve 2 - "Ntf" is the tension-flexion condition

Curve 3 - "Nce" is the compression-extension condition Curve 4 - "Ncf" is the compression-flexion condition.

Name	Type	Description
Shear Force	Curve	Shear Force Curve
Axial Force	Curve	Axial Force Curve
Moment	Curve	Moment Curve
Fzc(tension)	real	Critical Axial Force (Tension)
Fzc(compression)	real	Critical Axial Force (Compression)
Myc(Flexion)	real	Critical bending moment (Flexion)
Myc(Extension)	real	Critical bending moment (Extension)
Е	real	Distance

Return type

Array of Curve objects. 1st curve: Nte curve, 2nd curve: Ntf curve, 3rd curve: Nce curve, 4th curve: Ncf curve

Example

Calculate NIJ curves using input curves x,y,z, and constnats Fxc=1.0/2.0, Myc=3.0/4.0 and E=0.0.

$$c_{array} = Operate.Nij(x,y,z,1.0,2.0,3.0,4.0,0.0);$$

Nor(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Normalise Y axis values between [-1,1]

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Normalise Y axis values of curve m and store as curve p

```
p = Operate.Nor(m);
```

Nor2(Input Curve[Curve], Y Min Value[real], Y Max Value[real], Lock to Axis (Y Min)[integer], Lock to Axis (Y Max)[integer], Output Curve (optional)[Curve]) [static]

Description

Normalise Y axis values with manual settings. The operation takes the absolute value of the user-specified Y Min and Y Max. It then finds the maximum of these two numbers and divides all Y data by this number. There are two locks which probe or "lock on to" the Y Max and Y Min axis values which offers quick axis-normalizing.

Name	Type	Description
Input Curve	Curve	1st <u>Curve</u>
Y Min Value	real	The Minimum Y value
Y Max Value	real	The Maximum Y value
Lock to Axis (Y Min)	integer	Set the Lock button for the Y Minimum textbox
Lock to Axis (Y Max)	integer	Set the Lock button for the Y Maximum textbox
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Normalise the Y axis values of curve m taking the absolute maximum between the two values -200 and 100 (which for this example will equate to 200) with the Y Min Lock active and the Y Max Lock Inactive. This is then stored as curve p.

```
p = Operate.Nor2(m, -200, 100, 1, 0);
```

Nox(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Normalise X axis values between [-1,1]

Arguments

Name	Type	Description
Input Curve	Curve	Input Curve
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Normalise X axis values of curve m and store as curve p

```
p = Operate.Nox(m);
```

Nox2(Input Curve[<u>Curve</u>], X Min Value[<u>real</u>], X Max Value[<u>real</u>], Lock to Axis (X Min)[<u>integer</u>], Lock to Axis (X Max)[<u>integer</u>], Output Curve (optional)[<u>Curve</u>]) [static]

Description

Normalise X axis values with manual settings. The operation takes the absolute value of the user-specified X Min and X Max. It then finds the maximum of these two numbers and divides all X data by this number. There are two locks which probe or "lock on to" the X Max and X Min axis values which offers quick axis-normalizing.

Name	Type	Description
Input Curve	Curve	1st <u>Curve</u>
X Min Value	real	The Minimum X value
X Max Value	real	The Maximum X value
Lock to Axis (X Min)	integer	Set the Lock button for the X Minimum textbox
Lock to Axis (X Max)	integer	Set the Lock button for the X Maximum textbox
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Normalise the X axis values of curve m taking the absolute maximum between the two values -200 and 100 (which for this example will equate to 200) with the X Min Lock active and the X Max Lock Inactive. This is then stored as curve p.

```
p = Operate.Nox2(m, -200, 100, 1, 0);
```

Octave(Input Curve[Curve], Band type to convert to[String], Output Type[String], Input Type[String], Output Curve (optional)[Curve]) [static]

Description

Coverts a narrow band curve to either Octave or 1/3rd Octave bands

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Band type to convert to	String	Band type to convert to. Either "Octave" or "Third" Octave.
Output Type	String	Generate curve containing either "RMS" or "mean" values.
Input Type	String	Input curve contains either "Linear" or "dB" values.
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Convert curve m that contains Linear values to 1/3 Octave bands and output RMS in curve p

```
p = Operate.Octave(m, "third", "rms", "linear");
```

Order(Input Curve [Curve], Output Curve (optional)[Curve]) [static]

Description

Reverse the order of points in a curve

Name	Type	Description
Input Curve	Curve	Input Curve
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Reverse the order of points in curve m and store as curve p

p = Operate.Order(m);

Pbut(Input Curve[Curve], Frequency[real], Order[integer], X axis interval (optional)[real], Output Curve (optional)[Curve]) [static]

Description

Pure Butterworth Filter

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Frequency	real	Cut-off Frequency (Hz)
Order	integer	Filter order
X axis interval (optional)	real	If defined then T-HIS will automatically regularise the curve using this value first
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Filter curve m using a cut-off of 400Hz and order 2 and output as curve p. Regularise the input curve using an interval of 0.0001 first.

p = Operate.Pbut(m,400.0,2,0.0001);

Power(Input Curve[Curve], Power[real], Output Curve (optional)[Curve]) [static]

Description

Raise to the power

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Power	real	Power to raise Y axis values by
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Raise the Y axis values for curve m to the power 2.5 and store as curve p

p = Operate.Power(m,2.5);

Rave(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Calculate rolling average of a curve

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Calculate rolling average of curve m and store as curve p

p = Operate.Rave(m);

Rec(Input Curve], Output Curve (optional)[Curve]) [static]

Description

Calculate reciprocal

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Calculate receprocal of curve m and store as curve p

p = Operate.Rec(m);

Reg(Input Curve[Curve], X axis interval[real], Output Curve (optional)[Curve]) [static]

Description

Regularise X axis intervals for a curve.

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
X axis interval	real	New X axis interval
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Regularise curve m using a new X axis intreval of 0.0001.

p = Operate.Reg(m, 0.0001);

Res(Curves[Array of Curve objects], Output Curve (optional)[Curve]) [static]

Description

Resultant of a group of curves

Arguments

Name	Туре	Description
Curves	Array of Curve objects	Array of <u>Curve</u> objects
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Resultant of curves stored in curve array x

p = Operate.Res(x);

Rev(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Reverse X and Y axis values

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Reverse X and Y axis values of curve m and store as curve p

p = Operate.Rev(m);

Rs(Input Curve[Curve], Damping Factor[real], Sampling Points[int], X axis interval (optional)[real], Output Curve (optional)[Curve]) [static]

Description

Generate a reponse spectrum from input accelerations

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Damping Factor	real	Dammping factor
Sampling Points	int	Number of points to sample over (30 or 70)
X axis interval (optional)	real	If defined then T-HIS will automatically regularise the curve using this value first
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Array of <u>Curve</u> objects 1st curve : Relative displacement, 2nd curve : Relative velocity, 3th curve : Pseudo relative velocity, 4th curve : Absolute acceleration, 5th curve : Pseudo absolute acceleration

Example

Generate a response spectrum using a factor of 0.05 and 70 sampling points. Regularise the input curve using an interval of 0.0001 first.

p = Operate.Rs(m, 0.05, 70, 0.0001);

Sin(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Calculate Sine

Arguments

Name	Type	Description
Input Curve	Curve	Input Curve
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Calculate Sine() of curve m and store as curve p

p = Operate.Sin(m);

Smooth(Input Curve[Curve], Smoothing Factor[integer], Output Curve (optional)[Curve]) [static]

Description

Apply a smoothing factor to a curve

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Smoothing Factor	integer	Number of points to average over
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Smooth curve m using 7 points and store as curve p

p = Operate.Smooth(m,7);

Sqr(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Square root of a curve

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Square root curve m and store as curve p

p = Operate.Sqr(m);

Stress(Input Curve[Curve], Convert to[string], Output Curve (optional)[Curve]) [static]

Description

Convert between true and engineering stress

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Convert to	string	Type to convert to (True or Engineering)
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Convert curve m from engineering to true strees and store as curve p

p = Operate.Stress(m, "True");

Sub(1st Curve[Curve], 2nd Curve or constant[Curve or real], Output Curve (optional)[Curve]) [static]

Description

Subtract Y axis values

Arguments

Name	Туре	Description
1st Curve	Curve	1st <u>Curve</u>
2nd Curve or constant	Curve or real	2nd <u>Curve</u> or constant
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

To subtract the Y axis values for curve n from m and store as curve p

p = Operate.Sub(m,n);

To subtract 20.0 from the Y axis values in curve m and store as curve p

p = Operate.Sub(m,20.0);

Sum(Curves[Array of Curve objects], Output Curve (optional)[Curve]) [static]

Description

Sum of a group of curves

Arguments

Name	Туре	Description
Curves	Array of Curve objects	Array of <u>Curve</u> objects
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Sum of curves stored in curve array x

p = Operate.Res(x);

Sux(1st Curve[Curve], 2nd Curve or constant[Curve or real], Output Curve (optional)[Curve]) [static]

Description

Subtract X axis values

Arguments

Name	Type	Description
1st Curve	Curve	1st <u>Curve</u>
2nd Curve or constant	Curve or real	2nd <u>Curve</u> or constant
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

To subtract the X axis values for curve n from m and store as curve p

```
p = Operate.Sux(m,n);
```

To subtract 20.0 from the X axis values in curve m and store as curve p

```
p = Operate.Sux(m, 20.0);
```

Tan(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Calculate Tangent

Arguments

Name	Type	Description
Input Curve	Curve	Input Curve
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Calculate Tangent() of curve m and store as curve p

```
p = Operate.Tan(m);
```

Thiv(X Acceleration[Curve], Y Acceleration[Curve], Yaw Rate[Curve], Dx[real], Dy[real], X0[real]) [static]

Description

Theoretical Head Impact Velocity and the Post Impact Head Deceleration. These values are used to assess the performance of road side crash barriers.

This function returns an array containing 2 curve objects. The 1st curve is the THIV curve and the 2nd is the PHD curve. The peak values of these curves are the corresponding THIV and PHD values and can be obtained using the Curve.ymax property.

Arguments

Name	Type	Description
X Acceleration	Curve	X Acceleration Curve
Y Acceleration	Curve	Y Acceleration <u>Curve</u>
Yaw Rate	Curve	Yaw Rate <u>Curve</u>
Dx	real	Horizontal distance between occupants head and vehicle
Dy	real	Lateral distance between occupants head and vehicle
X0	real	Horizontal distance between occupants head and vehicle CofG

Return type

Array of <u>Curve</u> objects. 1st curve : THIV curve, 2nd curve : PHD curve

Calculate THIV and PHD curves x,y,z and distances Dx=0.6, Dy=0.3, X0=0.0.

```
c_array = Operate.Thiv(x,y,z,0.6,0.3,0.0);
thiv = c_array[0].ymax;
phd = c_array[1].ymax;
```

Tms(Input Curve[Curve], Period[real]) [static]

Description

3ms Clip Calculation. After calculating the 3ms clip value for a curve the value can also be obtained from the curve using the <u>Curve.tms</u> property. In addition to the 3ms clip value the start and end time for the time window can also be obtained using the <u>Curve.tms_tmin</u> and <u>Curve.tms_tmax</u> properties.

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Period	real	Clip period

Return type

3ms Clip value.

Example

Calculate 3ms clip for curve m, using a clip period of 0.003s.

```
val = Operate.Tms(m, 0.003);
```

Translate(Input Curve[Curve], X value[real], Y value[real], Output Curve (optional)[Curve]) [static]

Description

Translate a curve

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
X value	real	X translation value
Y value	real	Y translation value
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Translate curve m by x=0.2, y=0.3 and store as curve p

```
p = Operate.Translate(m, 0.2, 0.3);
```

Tti(Upper Rib Acceleration[Curve], Lower Rib Acceleration[Curve], T12 Acceleration[Curve]) [static]

Description

Thorax Trauma Index.

Name	Type	Description
Upper Rib Acceleration	Curve	Upper Rib Acceleration <u>Curve</u>
Lower Rib Acceleration	Curve	Lower Rib Acceleration Curve
T12 Acceleration	Curve	T12 Acceleration Curve

Return type

TTI value.

Example

Calculate TTI using curves x,y and z as inputs.

val = Operate.TTi(x,y,z);

Va(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Convert velocity spectrum to an acceleration spectrum

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Convert curve m and store as curve p

p = Operate.Va(m);

Vc(Input Curve[Curve], A[real], B[real], Calculation method[string], Output Curve (optional)[Curve]) [static] Description

Viscous Criteria calculate. The VC calculation can be done using 2 different calculation methods ECER95 and IIHS.

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
A	real	Constant A
В	real	Constant B
Calculation method	string	Either ECER95 or IIHS.
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Calculate VC for curve m, using A=1.3, B=0.229 and the ECER95 method

p = Operate.Vc(m,1.3,0.229,"ECER95");

Vd(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Convert velocity spectrum to a displacment spectrum

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Convert curve m and store as curve p

p = Operate.Vd(m);

Vec(1st Curve[<u>Curve</u>], 2nd Curve[<u>Curve</u>] or real], 3rd Curve[<u>Curve</u>] or real], Output Curve (optional)[<u>Curve</u>]) [static]

Description

Vector magnitude of 3 curves

Arguments

Name	Туре	Description
1st Curve	Curve	1st <u>Curve</u>
2nd Curve	Curve or real	2nd Curve
3rd Curve	Curve or real	2nd Curve
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Calculate vector magnitude of curves m,n,o and store as curve p

p = Operate.Vec(m,n,o);

Vec2d(1st Curve[Curve], 2nd Curve[Curve] or real], Output Curve (optional)[Curve]) [static]

Description

Vector magnitude of 2 curves

Name	Туре	Description
1st Curve	Curve	1st <u>Curve</u>
2nd Curve	Curve or real	2nd Curve
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Calculate vector magnitude of curves m and n and store as curve p

p = Operate.Vec2d(m,n);

Wif(1st Curve[Curve], 2nd Curve[Curve]) [static]

Description

Weigthed Integrated Factor (WIFAC) Correlation function.

Arguments

Name	Type	Description
1st Curve	Curve	1st <u>Curve</u>
2nd Curve	Curve	2nd Curve

Return type

Correlation value.

Example

Calculate the correlation between curves m and n.

val = Operate.Wif(m,n);

 $\label{thm:curve} Window(Input Curve \cite{Curve}\ci$

Description

Apply a smoothing window to a curve

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Window Type	string	Window type to apply (Hanning, cosine or exponetial)
percentage lead in (optional)	real	percentage lead in for cosine window
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Apply a hanning window to curve m and store as curve p

p = Operate.Window(m, "Hanning");

Zero(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Translate curve to 0,0

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Translate curve m to (0,0) and store as curve p

p = Operate.Zero(m);

ZeroX(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Translate curve to X=0.0

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Translate curve m to X=0 and store as curve p

p = Operate.ZeroX(m);

ZeroY(Input Curve[Curve], Output Curve (optional)[Curve]) [static]

Description

Translate curve to Y=0.0

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Translate curve m to Y=0 and store as curve p

```
p = Operate.ZeroY(m);
```

dB(Input Curve[Curve], Reference Value[real], Output Curve (optional)[Curve]) [static]

Description

Converts a curve to dB (y = 20.0*log(y/yref))

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Reference Value	real	Reference value
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Convert curve m to dB's using a reference value of 10.0 and store as curve p

```
p = Operate.dB(m, 10.0);
```

dBA(Input Curve[Curve], Weighting Type[String], Output Curve (optional)[Curve]) [static]

Description

Applies A-weigthing to a curve (converst from dB to dBA)

Arguments

Name	Type	Description
Input Curve	Curve	Input <u>Curve</u>
Weighting Type	String	Apply either Narrow band (narrow) or Octave band (octave) A weighting
Output Curve (optional)	Curve	<u>Curve</u> to overwrite

Return type

Curve object or NULL

Example

Apply narrow band A-weighting to convert curve m from dB to dBA and store as curve p

```
p = Operate.dBA(m, "narrow");
```

Options class

The Options class enables you to access several options in T/HIS. More...

Options class properties

Properties for widgets

Name	Type	Description
max_widgets	integer	The maximum number of <u>Widgets</u> that can be made for one <u>Window</u> . The default value is 1000
max_window_lines	integer	The maximum number of lines that can be made for a <u>Window.Error()</u> , <u>Window.Information()</u> , <u>Window.Message()</u> , <u>Window.Question()</u> or <u>Window.Warning()</u> window. The default value is 25

Detailed Description

The Options class is used to get/set options that T/HIS uses for certain functions. The options are available as **class** properties. See the documentation below for more details.

Page class

The Page class allows you to return or set the current active page in T/HIS. More...

Class functions

- AddGraph(Page number[Integer], Graph number (optional)[Integer], Graph number to copy properties from (optional)[Integer], Number of graphs (optional)[Integer])
- <u>Layout</u>(Page number[Integer], Layout[String or Integer], Num in X (optional)[Integer], Num in Y (optional)[Integer])
- RemoveGraph(Page number[Integer], Graph number (optional)[Integer], Lower end of range for removing graphs (optional)[Integer], Upper end of range for removing graphs (optional)[Integer])
- ReturnActivePage()
- ReturnGraphs(Page number[Integer])
- <u>SetActivePage</u>(Page number[Integer])

Detailed Description

The Page class allows you to return or set the current active page in T/HIS.

Details of functions

AddGraph(Page number[Integer], Graph number (optional)[Integer], Graph number to copy properties from (optional)[Integer], Number of graphs (optional)[Integer]) [static]

Description

Adds one or more graphs to the specified page.

Arguments

Name	Type	Description
Page number	Integer	Page number to add graph(s) to.
Graph number (optional)	Integer	Graph number to add to page. If this argument is 0 or not given, a new graph is created.
Graph number to copy properties from (optional)	Integer	If the second argument is 0, this specifies which graph to copy properties from when creating new graphs.
Number of graphs (optional)	Integer	If the second argument is zero, this specifies the number of new graphs to create and add to the specified page.

Return type

True if the graph was added, false if failed.

Example

To add graph 1 to page 2

Page.AddGraph(2,1);

Layout(Page number[Integer], Layout[String or Integer], Num in X (optional)[Integer], Num in Y (optional)[Integer]) [static]

Description

Sets the layout of either all pages or a specified page.

Name	Туре	Description
Page number	Integer	Page number for which to set layout. If this argument is 0 then layout will be set on all pages individually. If -1 then the layout will be set globally, as in the 'Graphs' panel.
Layout	String or Integer	Layout specifier. Options are: "wide" or 1 - Tile wide, "tall" or 2 - Tile tall, "cascade" or 3 - Cascade, "1x1" or 4 - 1x1, "2x2" or 5 - 2x2, "3x3" or 6 - 3x3, "xy" or 7 - XxY.
Num in X (optional)	Integer	Number of graphs in X-direction if user-defined XxY layout (7).
Num in Y (optional)	Integer	Number of graphs in Y-direction if user-defined XxY layout (7).

Return type

True if the layout was set, false if failed.

Example

To set the layout of page 1 to 'Tile tall'.

Page.Layout(1,"tall");

RemoveGraph(Page number[Integer], Graph number (optional)[Integer], Lower end of range for removing graphs (optional)[Integer], Upper end of range for removing graphs (optional)[Integer]) [static]

Description

Remove one or more graphs from the specified page.

Arguments

Name	Type	Description	
Page number	Integer	Page number to remove the graph from.	
Graph number (optional)	Integer	Graph number to remove from page. If this argument is 0 or not given, the highest number graph on the page will be removed. If this argument is -1, all graphs will be removed.	
Lower end of range for removing graphs (optional)	Integer	If the second argument is zero, this specifies the lower end of the range for removing graphs. All graphs with numbers within the specified range will be removed from the page.	
Upper end of range for removing graphs (optional)	Integer	If the second argument is zero, this specifies the upper end of the range for removing graphs. All graphs with numbers within the specified range will be removed from the page. If this argument is not given then it will be set to 32 by default.	

Return type

True if the graph was removed, false if failed.

Example

To remove any graph with number between 2 and 6 from page 3

Page.RemoveGraph(3,0,2,6);

ReturnActivePage() [static]

Description

Returns the current active page in T/HIS.

Arguments

No arguments

Return type

integer

Example

To return the current active page

```
var p = Page.ReturnActivePage();
```

ReturnGraphs(Page number[Integer]) [static]

Description

Returns the graphs on the specified page as an array of Graph objects.

Arguments

Name	Type	Description	
Page number	Integer	Page number for which to return the graphs it contains.	

Return type

Array of Graph objects

Example

To return the graphs on page 2.

```
Page.ReturnGraphs(2);
```

SetActivePage(Page number[Integer]) [static]

Description

Sets the current active page in T/HIS, returning -1 if the page does not exist or the page number if it does.

Arguments

Name	Type	Description
Page number	Integer	Page number to set to active page

Return type

True if the page was set, false if the page does not exist.

Example

To set the current active page to 2

```
Page.SetActivePage(2);
```

PopupWindow class

The PopupWindow class allows you to create popup windows for a graphical user interface. More...

Member functions

• Hide()

PopupWindow properties

Name	Type	Description
persistent		If the popup window will remain mapped when a button is pressed in it. By default (false) when a button is pressed in the popup window the popup will be unmapped. If set to true then the popup will remain mapped until the user clicks out of the window or hides it by calling Hide()

Detailed Description

The PopupWindow class allows you to make popup windows (that you can place <u>Widgets</u> in) and link them to <u>Widgets</u>. The popup window is then displayed by right clicking on the <u>Widget</u> the popup is <u>linked</u> to. The following very simple example shows how to create a popup window and link it to a <u>label</u> Widget.

```
// Create popup window
var pw = new PopupWindow();
// Create some widgets in the popup window
var pl = new Widget(pw, Widget.LABEL, 1, 30, 1, 7, "Label");
var pb = new Widget(pw, Widget.BUTTON, 1, 30, 7, 13, "Button");
var pt = new Widget(pw, Widget.TEXTBOX, 1, 30, 20, 26, "Textbox");
// Create windex("Provided title "Popup example" from 0.8-1.0 in x and 0.5-0.6 in y
var w = new Window("Popup example", 0.8, 1.0, 0.5, 0.6);
// Create label widget
var l = new Widget(w, Widget.LABEL,
                                              1, 50, 1, 7, "Right click for popup...");
// link popup window to widget
1.popupWindow = pw;
// Assign the onPopup callback method to the function 'do popup'
// This is only required if you want to make any changes before the popup
appears
1.onPopup = do popup;
// Show the widget and start event loop
w.Show();
function do popup()
     Message ("Showing popup");
```

See the documentation below and the Widget class for more details.

Constructor

new PopupWindow()

Description

Create a new PopupWindow object.

Arguments

No arguments

Return type

PopupWindow object

To create a PopupWindow containing the buttons "Create" and "Edit" and link it to button b:

```
var pw = new PopupWindow();
var c = new Widget(pw, Widget.BUTTON, 1, 30, 1, 7, "Create");
var e = new Widget(pw, Widget.BUTTON, 1, 30, 7, 13, "Edit");
b.popupWindow = pw;
```

Details of functions

Hide()

Description

Hides (unmaps) the popup window.

Arguments

No arguments

Return type

No return value

Example

To hide popup window w:

w.Hide();

Read class

The Read class allows the user to read CSV and Curve files into T/HIS. More...

Class functions

- Bulk(Filename/String)
- CSV (Filename [String], CSV type (optional) [integer], Row containing curve labels (optional) [integer], Row containing axis labels (optional)[integer], CSV seperation option (optional)[integer], X values column number (optional)[integer], X axis start value (optional)[real], X axis interval (optional)[real])
- Cur(Filename[String])
- DIAdem(Filename[String], X-axis channel [integer], X-axis start value (optional)[real], X axis interval (optional)[real], Show channel names (optional)[real], Filter[String])
- ISO(Filename[String], File format (optional)[integer])

 Key(Filename[String])
- LSPP(Filename/String), File format (optional)/integer))

Detailed Description

The Read class allows the user to read CSV and Curve files into T/HIS.

Details of functions

Bulk(Filename[String]) [static]

Description

Reads a Bulk Data file into T/HIS.

Arguments

Name	Type	Description
Filename	String	Name of Bulk Data file to read

Return type

No return value

Example

To read a Bulk Data file named "example.bdf"

Read.Bulk("example.bdf");

CSV(Filename[String], CSV type (optional)[integer], Row containing curve labels (optional)[integer], Row containing axis labels (optional)[integer], CSV seperation option (optional)[integer], X values column number (optional)[integer], X axis start value (optional)[real], X axis interval (optional)[real]) [static]

Description

Reads a CSV file into T/HIS.

Name	Type	Description
Filename	String	Name of CSV file to read.
CSV type (optional)	integer	0,1 or no argument for XYXY file type, 2 for XYYY.
Row containing curve labels (optional)	integer	Index of the row containing curve labels. This is row 1 by default, so should be set to 0 if no curve labels are present.
Row containing axis labels (optional)	integer	Index of the row containing axis labels. This is row 2 by default, so should be set to 0 if no axis labels are present.
CSV seperation option (optional)	integer	0 or no argument for comma, 1 for space, 2 for tab.
X values column number (optional)	integer	Index of the column containing X-values. This is column 1 by default.
X axis start value (optional)	real	Instead of taking X-values from the CSV file, this allows the user to define a value for the start of the X-axis.
X axis interval (optional)	real	User defined X-interval between points, to use together with the previous argument.

Return type

No return value

Example

To read an XYYY CSV file with X-values in column 3, named "example.csv"

Read.CSV("example.csv",2,0,0,3);

Cur(Filename[String]) [static]

Description

Reads a Curve file into T/HIS.

Arguments

Name	Type	Description
Filename	String	Name of Curve file to read

Return type

No return value

Example

To read a Curve file named "example.cur"

Read.Cur("example.cur");

DIAdem(Filename[String], X-axis channel [integer], X-axis start value (optional)[real], X axis interval (optional)[real], Show channel names (optional)[real], Filter[String]) [static]

Description

Reads a DIAdem file into T/HIS.

Name	Type	Description	
Filename String		Name of DIAdem header file to read.	
X-axis channel integ		Index of the channel to use as X-axis values. If this is 0 then the X-values can be generated from a start value and an interval in the following two arguments.	
X-axis start value real (optional)		Instead of taking X-values from a DIAdem channel, this allows the user to define a value for the start of the X-axis.	
X axis interval real (optional)		User defined interval between points on the X-axis, to use together with the previous argument.	
Show channel real names (optional)		Channel comments will be written into the curve tag if no argument or 0, channel names if this argument is 1.	
Filter Stri		String to filter channel names/comments. Only channels whose names/comments contain the filter string will be read.	

Return type

No return value

Example

To read DIAdem channels from "EXAMPLE.DAT", with channel comments filtered by "EXAMPLE" and X-values taken from channel 1:

Read.DIAdem("EXAMPLE.DAT",1,0,0,0,"EXAMPLE");

ISO(Filename[String], File format (optional)[integer]) [static]

Description

Reads an ISO file into T/HIS.

Arguments

Name	Type	Description
Filename	String	Name of ISO file to read
File format (optional)	integer	Format of ISO file, no argument, 0 or 1 for multiple channels, 2 for single channel.

Return type

No return value

Example

To read a single channel ISO file named "example.001"

Read.ISO("example.001",2);

Key(Filename[String]) [static]

Description

Reads a Keyword file into T/HIS.

Arguments

Name	Type	Description
Filename	String	Name of Keyword file to read

Return type

No return value

Example

To read a Keyword file named "example.key"

Read.Key("example.key");

LSPP(Filename[String], File format (optional)[integer]) [static]

Description

Reads an LS-PREPOST file into T/HIS.

Arguments

Name	Туре	Description
Filename	String	Name of LS-PREPOST file to read
File format (optional)	integer	Format of LS-PREPOST file, no argument, 0 or 1 for Curve File, 2 for XY Pairs.

Return type

No return value

Example

To read an LS-PREPOST XY pairs file named "example.xy"

Read.LSPP("example.xy",2);

Symbol class

The Symbol class contains constants relating to curve symbols. More...

Symbol constants

Name	Description
Symbol.CIRCLE	Circle symbol
Symbol.CROSS	Cross symbol
Symbol.DIAMOND	Diamond symbol
Symbol.DOT	Dot symbol
Symbol.HOURGLASS	Hourglass symbol
Symbol.NONE	No symbol
Symbol.SQUARE	Square symbol
Symbol.STAR	Star symbol
Symbol.TRIANGLE	Triangle symbol

Detailed Description

The Symbol class is used to define the symbol style used by curves:

p.symbol = Symbol.TRIANGLE;

Units class

The Units class contains constants relating to curve units. More...

Class functions

 $\bullet \quad \underline{USER}(mass[real], time[real], length[real], angle[real], temperature[real], current (optional)[real])\\$

Units constants

Name	Description
Units.ACCELERATION	Acceleration units
Units.AREA	Area units
Units.CONDUCTIVITY	Conductivity units
Units.CURRENT	Current units
Units.DENSITY	Density units
Units.DISPLACEMENT	Displacement units
Units.ELECTRIC_FIELD_VECTOR	Electric Field Vector units
Units.ENERGY	Energy units
Units.ENERGY_DENSITY	Energy Density units
Units.FLUX	Thermal Flux units
Units.FORCE	Force units
Units.FORCE_WIDTH	Force per unit width units
Units.FREQUENCY	Frequency units
Units.LENGTH	Length units
Units.MAGNETIC_FLUX_VECTOR	Magnetic Flux Vector units
Units.MASS	MAss units
Units.MASS_FLOW	Mass Flow rate units
Units.MOMENT	Moment units
Units.MOMENTUM	Momentum units
Units.MOMENT_WIDTH	Moment per unit width units
Units.NONE	No units
Units.POWER	Power units
Units.PRESSURE	Pressure units
Units.Q_CRITERION	Q Criterion units
Units.ROTATION	Rotation units
Units.ROTATIONAL_ACCELERATION	Rotational Acceleration units
Units.ROTATIONAL_VELOCITY	Rotational Velocity units
Units.STRAIN	Strain units
Units.STRESS	Stress units
Units.TEMPERATURE	Temperature units
Units.THERMAL_DIFFUSIVITY	Thermal Diffusivity units
Units.TIME	Time units
Units.UNKNOWN	Unknown units
Units.VECTOR_POTENTIAL	Vector Potential units

Units.VELOCITY	Velocity units
Units.VISCOSITY	Viscosity units
Units.VOLUME	Volume units
Units.VORTICITY	Vorticity units
Units.WORK	Work units

Detailed Description

The Units class is used to define the units for each axis of a curve:

p.x_axis_units = Units.LENGTH

Details of functions

USER(mass[real], time[real], length[real], angle[real], temperature[real], current (optional)[real]) [static]

Description

Setup a user defined UNIT

Arguments

Name	Type	Description
mass	real	Power for mass dimensions.
time	real	Power for time dimensions.
length	real	Power for length dimensions.
angle	real	Power for angle dimensions.
temperature	real	Power for temperature dimensions.
current (optional)	real	Power for current dimensions.

Return type

0 (user defined)

Example

To set the y-axis unit of curve 1 to $(m/s)^2$:

1.y_unit = Units.USER(0.0,2.0,-2.0,0.0,0.0,0.0);

UnitSystem class

The UnitSystem class contains constants relating to curve unit systems. More...

UnitSystem constants

Name	Description
UnitSystem.U1	U1 unit system (m,ks,s)
UnitSystem.U2	U2 unit system (mm,T,s)
UnitSystem.U3	U3 unit system (mm,kg,ms)
UnitSystem.U4	U4 unit system (mm,gm,ms)
UnitSystem.U5	U5 unit system (ft,slug,s)
UnitSystem.U6	U6 unit system (m,T,s)

Detailed Description

The UnitSystem class is used to define the Unit System for a curve:

p.UnitSystem = UnitSystem.U1

Widget class

The Widget class allows you to create components for a graphical user interface. More...

Class functions

- CtrlPressed()
- PixelsPerUnit()
- ShiftPressed()
 StringLength(text[string], monospace (optional)[boolean], fontSize (optional)[integer])

Member functions

- AddWidgetItem(item/WidgetItem), position (optional)/integer])
- Circle(colour/constant), fill/boolean], xc[integer], yc[integer], radius[integer])
- Clear Selection()
- Cross(colour (optional)[constant])
- Delete()
- DumpImageString(filename[string], format (optional)[constant])
- ItemAt(index[integer])
- Line(colour[constant], x1[integer], y1[integer], x2[integer], y2[integer])
- Polygon(colour[constant], fill[boolean], x1[integer], y1[integer], x2[integer], y2[integer], ... xn[integer], ... yn[integer])
- ReadImageFile(filename[string], justify (optional)[constant], transparent (optional)[colour value (integer)], tolerance (optional)[integer])
- ReadImageŠtring(string], justify (optional)[constant], transparent (optional)[colour value (integer)], tolerance (optional)[integer])
- Rectangle(colour[constant], fill[boolean], x1[integer], y1[integer], x2[integer], y2[integer])
- RemoveAllWidgetItems()
- RemoveWidgetItem(item[WidgetItem])
- Show()
- <u>Static()</u> <u>Tick(colour (optional)[constant])</u>
- TotalItems()
- WidgetItems()

Widget constants

Name	Description
Widget.BUTTON	Button widget
Widget.CHECKBOX	Checkbox widget
Widget.COMBOBOX	Combobox widget
Widget.LABEL	Label widget
Widget.LISTBOX	Listbox widget
Widget.TEXTBOX	Text input widget

Constants for Justification

Name	Description
Widget.BOTTOM	Bottom justification
Widget.CENTRE	Centre (horizontal) justification
Widget.LEFT	Left justification
Widget.MIDDLE	Middle (vertical) justification
Widget.RIGHT	Right justification
Widget.SCALE	Image will be scaled to fit widget
Widget.TOP	Top justification

Constants for Selection

Name	Description
Widget.SELECT_ENHANCED	Multiple WidgetItems in a ListBox Widget can be selected. When the user selects a WidgetItem the selection is cleared and the new WidgetItem selected. However, if the user presses the Ctrl key when clicking on a WidgetItem, the clicked WidgetItem gets toggled and all other WidgetItems are left untouched. If the user presses the Shift key while clicking on a WidgetItem, all WidgetItems between the last selected WidgetItem and the clicked WidgetItem are selected or unselected, depending on the state of the clicked WidgetItem.
Widget.SELECT_MULTIPLE	Multiple <u>WidgetItems</u> in a <u>ListBox</u> Widget can be selected. When the user selects a <u>WidgetItem</u> , the selection status of that <u>WidgetItem</u> is toggled and the other <u>WidgetItems</u> are left alone.
Widget.SELECT_NONE	No WidgetItem in a ListBox Widget can be selected
Widget.SELECT_SINGLE	A single <u>WidgetItem</u> in a <u>ListBox</u> Widget can be selected. When the user selects a <u>WidgetItem</u> , any already-selected <u>WidgetItem</u> becomes unselected, and the user cannot unselect the selected <u>WidgetItem</u> by clicking on it.

Constants for Image RGB format

Name	Description
Widget.RGB24	24 bits for RGB data in widget images
Widget.RGB8	8 bits for RGB data in widget images

Constants for Colour

Name	Description
Widget.BLACK	Colour black
Widget.BLUE	Colour blue
Widget.CYAN	Colour cyan
Widget.DARKBLUE	Colour dark blue
Widget.DARKGREEN	Colour dark green
Widget.DARKGREY	Colour dark grey
Widget.DARKRED	Colour dark red
Widget.DEFAULT	Default colour for widgets
Widget.GREEN	Colour green
Widget.GREY	Colour grey
Widget.LIGHTGREY	Colour light grey
Widget.MAGENTA	Colour magenta
Widget.ORANGE	Colour orange
Widget.RED	Colour red
Widget.WHITE	Colour white
Widget.YELLOW	Colour yellow

Widget properties

Name	Type	Description
active	logical	If widget is active (true) or disabled (false)

	-	
background	constant	Widget background colour. Can be: Widget.BLACK, Widget.WHITE, Widget.RED, Widget.GREEN, Widget.BLUE, Widget.CYAN, Widget.MAGENTA, Widget.YELLOW, Widget.DARKRED, Widget.DARKGREEN, Widget.DARKBLUE, Widget.GREY, Widget.DARKGREY, Widget.DARKGREY, Widget.DEFAULT
bottom	integer	Widget bottom coordinate
fontSize	integer	Widget font size in points. Currently only supports the following sizes: 6, 7, 8, 10, 12, 14, 18, 24. Can be used only with Widget.LABEL and Widget.BUTTON. Both LATIN1 and UTF-8 encoding is supported on Windows but Linux only supports LATIN1 encoding at the moment.
foreground	constant	Widget foreground colour. Can be: Widget.BLACK, Widget.WHITE, Widget.RED, Widget.GREEN, Widget.BLUE, Widget.CYAN, Widget.MAGENTA, Widget.YELLOW, Widget.DARKRED, Widget.DARKGREEN, Widget.DARKBLUE, Widget.GREY, Widget.DARKGREY, Widget.DARKGREY, Widget.DEFAULT
hover	string	Widget hover text
imageHeight (read only)	integer	Height of widget image (pixels)
imageWidth (read only)	integer	Width of widget image (pixels)
justify	constant	Widget justification. Can be: Widget.LEFT, Widget.RIGHT or Widget.CENTRE (default). Note that text in <u>TEXTBOX</u> widgets is always left justified.
left	integer	Widget left coordinate
lineWidth	integer	Width of lines when drawing graphics (initially 1; values 1-255 allowed).
macroTag	string	Tag to use for this widget when recording a macro. If empty then the <u>text</u> property value will be used.
monospace	boolean	true if the widget uses a monospace font instead of a proportional width font (default). <u>Label</u> and <u>button</u> Widgets only.
onChange	function	Function to call when the text in a TEXTBOX widget or the selection in a COMBOBOX widget is changed. The Widget object is accessible in the function using the 'this' keyword (see the example below for more details of how to define the function and how to use the 'this' keyword). To unset the function set the property to null. Note that this function is called when the user actually types something into the textbox, or selects an item in the combobox, NOT when the Widget.text property changes.
onClick	function	Function to call when a <u>BUTTON</u> , <u>CHECKBOX</u> or <u>COMBOBOX</u> widget is clicked. The Widget object is accessible in the function using the 'this' keyword (see the example below for more details of how to define the function and how to use the 'this' keyword). To unset the function set the property to null. Note that this function is called when the user actually clicks on the button, NOT when the <u>Widget.pushed</u> property changes. For the <u>COMBOBOX</u> widget the function is called before the list of items is mapped.
onPopup	function	Function to call when a <u>BUTTON</u> , <u>LABEL</u> or <u>TEXTBOX</u> widget is right clicked to map a popup. The <u>Widget</u> object is accessible in the function using the 'this' keyword. The <u>PopupWindow</u> can then be found by using the <u>popupWindow</u> property of the <u>Widget</u> . The function is called before the popup is mapped so you can change the widgets in the popup as required.
onTimer	function	Function to call for a widget when timerDelay ms have elapsed after setting this. Additionally if timerRepeat is set this function will be called repetitively, every timerDelay ms. The Widget object is accessible in the function using the 'this' keyword. To unset the function set the property to null. Note that as soon as this property is set the timer starts!

popupDirection	constant	How <u>PopupWindow</u> will be mapped relative to this widget. Can be <u>Widget.LEFT</u> , <u>Widget.RIGHT</u> , <u>Widget.TOP</u> or <u>Widget.BOTTOM</u> (default).
popupSymbol	logical	TRUE (default) if a symbol will be shown for a PopupWindow.
popupWindow	PopupWindow object	PopupWindow for this Widget. Only available for Button, Label and Textbox Widgets. To remove a PopupWindow from a Widget set to null.
pushed	logical	If widget is pushed (true) or not (false). This only affects <u>Widget.BUTTON</u> with the <u>Widget.toggle</u> property set, and <u>Widget.CHECKBOX</u> widgets.
right	integer	Widget right coordinate
select	constant	Selection method for ListBox Widgets. Can be: Widget.SELECT_NONE, Widget.SELECT_SINGLE or Widget.SELECT_MULTIPLE or Widget.SELECT_ENHANCED (default).
selectedItem	WidgetItem object	WidgetItem that is currently selected for a ComboBox Widget. If null no WidgetItem is selected. For a ListBox Widget this property contains the last WidgetItem that was (de)selected. To get a list of all of the selected WidgetItems use WidgetItems() to return all of the WidgetItems and inspect the WidgetItem selected property.
shown (read only)	boolean	true if the widget is visible. To alter the visibility of a widget use the Show() and Hide() methods.
text	string	Widget text. For a <u>ComboBox</u> Widget this will be the text for the currently selected <u>WidgetItem</u>
textHidden	boolean	true if the widget text is hidden and replaced by asterisks. This may be used to create textboxes to type passwords in. TextBox Widgets only.
timerDelay	integer	Delay in ms before the function set for <u>onTimer</u> will be called. The initial value is 1000 (ms). Also see <u>timerRepeat</u> .
timerRepeat	logical	If the function set for <u>onTimer</u> will be called once (false) or repeatedly (true). The initial value is false. Also see <u>timerDelay</u> .
toggle	logical	If widget can be toggled (true) or not (false). This only affects <u>Widget.BUTTON</u> widgets.
top	integer	Widget top coordinate
window (read only)	Window object	The Window that this widget is defined in
xResolution	integer	X resolution of button when drawing <u>lines</u> , <u>circles</u> , <u>polygons</u> and <u>rectangles</u> (initially 100). X coordinates on the Widget can be from 0 (on the left of the widget) to xResolution (on the right of the widget). Available for <u>Widget.LABEL</u> and <u>Widget.BUTTON</u> Widgets.
yResolution	integer	Y resolution of button when drawing <u>lines</u> , <u>circles</u> , <u>polygons</u> and <u>rectangles</u> (initially 100). Y coordinates on the Widget can be from 0 (on the top of the widget) to yResolution (on the bottom of the widget). Available for <u>Widget.LABEL</u> and <u>Widget.BUTTON</u> Widgets.

Detailed Description

The Widget class allows you to create Widgets (buttons, textboxes etc) in a Window for a graphical user interface. Callback functions can be declared for widgets to give actions when a button is pressed or the text in a textbox is selected etc. The following example displays various widgets in a window. Several callback methods are used. The exit button allows the user to exit the script but the button is only made active if the checkbox widget is ticked. If the button widgets are pressed feedback is given to the user

```
var count = 0;
// Create window
var w = new Window("Test", 0.8, 1.0, 0.5, 0.6);
// Create all of the widgets
var l = new Widget(w, Widget.LABEL, 1, 30, 1, 7, "Text:");
var t = new Widget(w, Widget.TEXTBOX, 31, 80, 1, 7, "Enter text");
var b = new Widget(w, Widget.BUTTON, 1, 30, 8, 14, "Press me");
var b2= new Widget(w, Widget.BUTTON, 31, 61, 8, 14, "Don't press me");
var c = new Widget(w, Widget.CHECKBOX,62, 68, 8, 14);
var l2= new Widget(w, Widget.LABEL, 1, 80, 15, 21, "You haven't pressed the
```

```
button yet...");
var e = new Widget(w, Widget.BUTTON,
                                  1, 21, 22, 28, "Exit");
// Allow button widget b2 to toggle
b2.toggle = true;
// The exit button is initially inactive
e.active = false;
// Assign the callback functions
b.onClick = clicked;
b2.onClick = clicked;
c.onClick = clicked;
t.onChange = changed;
e.onClick = confirm exit;
// Show the window and start event loop
w.Show();
function clicked()
  If checkbox is clicked then set the state of the exit button
   if (this === c)
   {
       Message("Checkbox clicked");
       e.active = c.pushed;
// If the "Don't press me' button is pressed then change the colour if the
button is pressed in.
   else if (this === b2)
       Message("I said don't press!!!");
       if (b2.pushed) b2.background = Widget.WHITE;
                    b2.background = Widget.DEFAULT;
       else
// If the "Press me" button is pressed then update the text in the label widget
// with how many times the button has been pressed.
   else
   {
       Message("You pressed...");
       count++:
       12.text = "Button pressed " + count + " times";
function changed()
^{\prime}/ If the user has changed the text in the textbox then give a message in
// the dialogue box
   Message("Text has changed to " + this.text);
function confirm exit()
// Map confirm box
   var ret = Window.Question("Confirm exit", "Are you sure you want to quit?");
// If the user has answered yes then exit from the script.
   if (ret == Window.YES) Exit();
```

Graphics (lines, circles, rectanges etc) can be drawn on <u>Widget.LABEL</u> and <u>Widget.BUTTON</u> widgets. If these methods are used the resolution of the widget is 100 units in x and y and the <u>origin</u> is at the top left of the widget. See the documentation below and the <u>WidgetItem</u> and <u>Window</u> classes for more details.

Constructor

new Widget(window[<u>Window</u> or <u>PopupWindow</u>], type[constant], left[integer], right[integer], top[integer], bottom[integer], text (optional)[string])

Description

Create a new Widget object.

Name	Туре	Description
window	Window or PopupWindow	Window or PopupWindow that widget will be created in
type	constant	Widget type. Can be Widget.LABEL, Widget.BUTTON, Widget.CHECKBOX, Widget.COMBOBOX, Widget.LISTBOX or Widget.TEXTBOX.
left	integer	left coordinate of widget
right	integer	right coordinate of widget
top	integer	top coordinate of widget
bottom	integer	bottom coordinate of widget
text (optional)	string	Text to show on widget (optional for LABEL, BUTTON and TEXTBOX, not required for CHECKBOX, COMBOBOX and LISTBOX)

Return type

Widget object

Details of functions

AddWidgetItem(item[WidgetItem], position (optional)[integer])

Description

Adds a WidgetItem to the Widget. Also see Widget.RemoveAllWidgetItems and Widget.RemoveWidgetItem.

Arguments

Name	Туре	Description
item	WidgetItem	WidgetItem to add
position (optional)	C	Position on <u>Widget</u> to add the <u>WidgetItem</u> . Any existing <u>WidgetItems</u> will be shifted down as required. If omitted the <u>WidgetItem</u> will be added to the end of the existing ones. Note that positions start at 0 .

Return type

No return value

Example

To add WidgetItem wi to widget w:

w.AddWidgetItem(wi);

Circle(colour[constant], fill[boolean], xc[integer], yc[integer], radius[integer])

Description

Draws a circle on the widget. Only possible for <u>Widget.LABEL</u> and <u>Widget.BUTTON</u> widgets. The coordinates are local to the Widget, not the Window. See properties <u>xResolution</u> and <u>yResolution</u> for more details. Note that the widget graphics will only be updated when the widget is redrawn. This is to allow the user to do multiple drawing commands on a widget. To force the widget to be redrawn call <u>Show()</u>.

Name	Type	Description	
colour	constant	Colour of circle. See <u>foreground</u> for colours.	
fill	boolean	If circle should be filled or not.	
xc	integer	x coordinate of centre of circle.	
yc	integer	y coordinate of centre of circle.	
radius	integer	radius of circle.	

Return type

no return value

Example

To draw a red filled circle, radius 25, at (50, 50) on widget w:

```
w.Circle(Widget.RED, true, 50, 50, 25);
```

Clear()

Description

Clears any graphics on the widget. Only possible for <u>Widget.LABEL</u> and <u>Widget.BUTTON</u> widgets. Note that the widget graphics will only be updated when the widget is redrawn. This is to allow the user to do multiple drawing commands on a widget. To force the widget to be redrawn call <u>Show()</u>.

Arguments

No arguments

Return type

no return value

Example

To clear any graphics for widget w:

```
w.Clear();
```

ClearSelection()

Description

Clears selection of any $\underline{\text{WidgetItems}}$ on the widget. Only possible for $\underline{\text{Widget.COMBOBOX}}$ and $\underline{\text{Widget.LISTBOX}}$ widgets.

Arguments

No arguments

Return type

no return value

Example

To clear selection of any WidgetItems for widget w:

```
w.ClearSelection();
```

Cross(colour (optional)[constant])

Description

Draws a cross symbol on the widget. Only possible for Widget.LABEL and Widget.BUTTON widgets.

Arguments

Name	Type	Description
colour (optional)	constant	Colour of cross symbol. See <u>foreground</u> for colours. If omitted, current foreground colour is used.

Return type

no return value

Example

To draw a red cross symbol on widget w:

```
w.Cross(Widget.RED);
```

CtrlPressed() [static]

Description

Check to see if the Ctrl key is pressed

Arguments

No arguments

Return type

true/false

Example

To test if someone has the Ctrl key pressed:

```
if (Widget.CtrlPressed()) { ... }
```

Delete()

Description

Deletes the widget from T/HIS (removing it from the window it is defined in) and returns any memory/resources used for the widget. This function should not normally need to be called. However, sometimes a script may want to recreate widgets in a window many times and unless the old widgets are deleted T/HIS will reach the maximum number of widgets for a window (Options.max_widgets). To avoid this problem this method can be used to force T/HIS to delete and return the resources for a widget. **Do not use the Widget object after calling this method**.

Arguments

No arguments

Return type

no return value

Example

To delete widget w:

```
w.Delete();
```

DumpImageString(filename[string], format (optional)[constant])

Description

Dumps a string representation of an image for a widget to a file in a form that can be used by Widget.ReadImageString(). Only possible for Widget.LABEL and Widget.BUTTON widgets.

Arguments

Name	Type	Description
filename	string	Filename to dump string representation to
format (optional)		Can be <u>Widget.RGB8</u> or <u>Widget.RGB24</u> . Before version 15 T/HIS only used 8 bits to store RGB (red, green and blue) colour information for widget images. In version 15 widget images have been changed to use 24 bits to store RGB information (8 bits for red, 8 bits for green and 8 bits for blue). Both formats are supported. If omitted the new <u>Widget.RGB24</u> format will be used. See <u>Widget.ReadImageString()</u> for more details.

Return type

no return value

Example

To dump the image data to file 'image_data' for widget w with the old 8 bit RGB representation:

w.DumpImageString('image data', Widget.RGB8);

To dump the image data to file 'image_data' for widget w with 24 bit RGB representation:

w.DumpImageString('image data', Widget.RGB24);

Hide()

Description

Hides the widget on the screen

Arguments

No arguments

Return type

No return value

Example

To hide widget w

w.Hide();

ItemAt(index[integer])

Description

Returns the WidgetItem object used at index in this Widget. See also Widget. TotalItems() and Widget.WidgetItems().

Arguments

Name	Type	Description
index	integer	index to return $\underline{\text{WidgetItem}}$ for. Note that indices start at 0.

Return type

WidgetItem object.

Example

```
To loop over the WidgetItems used in Widget w
for (i=0; i<w.TotalItems(); i++)
{
    wi = w.ItemAt(i);
}</pre>
```

Line(colour[constant], x1[integer], y1[integer], x2[integer], y2[integer])

Description

Draws a line on the widget. Only possible for $\underline{\text{Widget.LABEL}}$ and $\underline{\text{Widget.BUTTON}}$ widgets. The coordinates are local to the Widget, not the Window. See properties $\underline{\text{xResolution}}$ and $\underline{\text{yResolution}}$ for more details. Note that the widget graphics will only be updated when the widget is redrawn. This is to allow the user to do multiple drawing commands on a widget. To force the widget to be redrawn call Show().

Arguments

Name	Type	Description
colour	constant	Colour of line. See <u>foreground</u> for colours.
x1	integer	x coordinate of start of line.
y1	integer	y coordinate of start of line.
x2	integer	x coordinate of end of line.
y2	integer	y coordinate of end of line.

Return type

no return value

Example

To draw a red line from (10, 90) to (90, 10) on widget w: w.Line (Widget.RED, 10, 90, 90, 10);

PixelsPerUnit() [static]

Description

Returns the number of pixels per unit coordinate. This will vary depending on the monitor T/HIS is running on.

Arguments

No arguments

Return type

pixels/unit (float)

Example

To return how many pixels there are per unit coordinate:

```
var ppu = Widget.PixelsPerUnit();
```

Polygon(colour[constant], fill[boolean], x1[integer], y1[integer], x2[integer], y2[integer], ... xn[integer], ... yn[integer])

Description

Draws a polygon on the widget. Only possible for <u>Widget.LABEL</u> and <u>Widget.BUTTON</u> widgets. The coordinates are local to the Widget, not the Window. See properties <u>xResolution</u> and <u>yResolution</u> for more details. Note that the widget graphics will only be updated when the widget is redrawn. This is to allow the user to do multiple drawing commands on a widget. To force the widget to be redrawn call Show().

Arguments

Name	Type	Description
colour	constant	Colour of polygon. See <u>foreground</u> for colours.
fill	boolean	If polygon should be filled or not.
x1	integer	x coordinate of point 1.
y1	integer	y coordinate of point 1.
x2	integer	x coordinate of point 2.
y2	integer	y coordinate of point 2.
xn	integer	x coordinate of point n.
yn	integer	y coordinate of point n.

Alternatively instead of x1, y1 etc you can specify a single argument which is an array of coordinates to use. In either case the number of points (x, y) pairs is limited to 30. Any extra points will be ignored.

Return type

no return value

Example

To draw a red filled triangle with corners (20, 20) and (50, 80) and (80, 20) on widget w:

w.Polygon(Widget.RED, true, 20, 20, 50, 80, 80, 20);

ReadImageFile(filename[string], justify (optional)[constant], transparent (optional)[colour value (integer)], tolerance (optional)[integer])

Description

Reads an image from a file to show on the widget. Only possible for <u>Widget.LABEL</u> and <u>Widget.BUTTON</u> widgets. The image will be shown on the widget underneath any text. Note that due to the way that colours are used for menus in T/HIS only a small number of colours are available for Widget images. Black and white images will display without any issues but colour images will be displayed with a reduced set of colours.

Name	Туре	Description
filename	string	Image file (BMP, GIF, JPEG or PNG) to read. To remove an image use null.
justify (optional)	constant	Widget justification. Can be a bitwise or of Widget.LEFT, Widget.RIGHT or Widget.CENTRE and Widget.TOP, Widget.MIDDLE or Widget.BOTTOM. Additionally Widget.SCALE can be used to scale the image (either reducing or enlarging it) so that it fills the widget. If omitted the default is Widget.CENTRE Widget.MIDDLE without scaling.
transparent (optional)	colour value (integer)	Transparent colour. Must be a colour returned by <u>Colour.RGB()</u> in T/HIS. If given then this colour will be replaced by a transparent colour. i.e. the widget background colour will be shown. If omitted or null no transparency will be used.
tolerance (optional)	integer	Tolerance for transparent colour (0-255). Any pixels in the image that have a red, green and blue colour value within <i>tolerance</i> of the transparent colour will be transparent. For example if the transparent colour was given as Colour.RGB(255, 0, 0) and <i>tolerance</i> is 0 only pixels which have red value 255 and green value 0 and blue value 0 will be made transparent. If <i>tolerance</i> is 4, pixels which have red values between 251 and 255 and green values between 0 and 4 and blue values between 0 and 4 will be made transparent. If omitted a value of 8 will be used.

Return type

no return value

Example

To read image example.png for widget w and place it at the top left:

w.ReadImageFile("example.png", Widget.TOP|Widget.LEFT);

To read image example.png for widget w and place it at the top left, scaling it to fit the widget:

w.ReadImageFile("example.png", Widget.TOP|Widget.LEFT|Widget.SCALE);

To read image example.png for widget w and place it at the top left, replacing red with a transparent colour:

w.ReadImageFile("example.png", Widget.TOP|Widget.LEFT, Colour.RGB(255, 0, 0));

To remove an image from widget w:

w.ReadImageFile(null);

ReadImageString(string/string/, justify (optional)/constant/, transparent (optional)/colour value (integer)/, tolerance (optional)[integer])

Description

Reads an image from a JavaScript string previously created by Widget.DumpImageString() to show on the widget. Only possible for Widget.LABEL and Widget.BUTTON widgets. The image will be shown on the widget underneath any

Note, prior to version 15 of T/HIS only a small number of colours were available for Widget images. In version 14 and earlier the RGB (red, green and blue) information for each pixel in the image was packed into a single byte (8 bits) with 3 bits for red, 3 for green and 2 for blue. Widget.DumpImageString() always returned the string beginning with "RRRGGGBB_RLE" which is this 8 bit format with run length encoding. This is format Widget.RGB8.

In version 15 support for Widget images was enhanced to give 24bit support for colours. The RGB information for each

pixel has 8 bits for red, 8 bits for green and 8 bits for blue. This is format Widget.RGB24

From version 15 Widget.DumpImageString() can either return the the old 8 bit format Widget.RGB8 (string beginning with "RRRGGGBB_RLE") or return the the new 24bit format Widget.RGB24 (string beginning with "RGB24_Z"). ReadImageString supports both formats.

Name	Type	Description
string	string	String containing the image data previously created by <u>Widget.DumpImageString()</u> . To remove an image use null.
justify (optional)	constant	Widget justification. Can be a bitwise or of <u>Widget.LEFT</u> , <u>Widget.RIGHT</u> or <u>Widget.CENTRE</u> and <u>Widget.TOP</u> , <u>Widget.MIDDLE</u> or <u>Widget.BOTTOM</u> . Additionally <u>Widget.SCALE</u> can be used to scale the image (either reducing or enlarging it) so that it fills the widget. If omitted the default is Widget.CENTRE Widget.MIDDLE without scaling.
transparent (optional)	colour value (integer)	Transparent colour. Must be a colour returned by <u>Colour.RGB()</u> in T/HIS. If given then this colour will be replaced by a transparent colour. i.e. the widget background colour will be shown. If omitted or null no transparency will be used.
tolerance (optional)	integer	Tolerance for transparent colour (0-255). Only used for the new 24bit format Widget.RGB24 (strings beginning with "RGB24_Z"). Ignored for the old 8 bit format Widget.RGB8 (strings beginning with "RRRGGGBB_RLE"). Any pixels in the image that have a red, green and blue colour value within <i>tolerance</i> of the transparent colour will be transparent. For example if the transparent colour was given as Colour.RGB(255, 0, 0) and <i>tolerance</i> is 0 only pixels which have red value 255 and green value 0 and blue value 0 will be made transparent. If <i>tolerance</i> is 4, pixels which have red values between 251 and 255 and green values between 0 and 4 and blue values between 0 and 4 will be made transparent. If omitted a value of 8 will be used.

Return type

no return value

Example

To read image data from string s for widget w and place it at the top left:

```
w.ReadImageString(s, Widget.TOP|Widget.LEFT);
```

To read image data from string s for widget w and place it at the top left, scaling it to fit the widget:

```
w.ReadImageString(s, Widget.TOP|Widget.LEFT|Widget.SCALE);
```

To read image data from string s for widget w and place it at the top left, replacing red with a transparent colour:

```
w.ReadImageString(s, Widget.TOP|Widget.LEFT, Colour.RGB(255, 0, 0));
```

To remove an image from widget w:

w.ReadImageString(null);

Rectangle(colour[constant], fill[boolean], x1[integer], y1[integer], x2[integer], y2[integer])

Description

Draws a rectangle on the widget. Only possible for <u>Widget.LABEL</u> and <u>Widget.BUTTON</u> widgets. The coordinates are local to the Widget, not the Window. See properties <u>xResolution</u> and <u>yResolution</u> for more details. Note that the widget graphics will only be updated when the widget is redrawn. This is to allow the user to do multiple drawing commands on a widget. To force the widget to be redrawn call <u>Show()</u>.

Name	Туре	Description
colour	constant	Colour of rectangle. See <u>foreground</u> for colours.
fill	boolean	If rectangle should be filled or not.
x1	integer	x coordinate of first corner of rectangle.
y1	integer	y coordinate of first corner of rectangle.
x2	integer	x coordinate of second (opposite) corner of rectangle.
y2	integer	y coordinate of second (opposite) corner of rectangle.

Return type

no return value

Example

To draw a red filled rectangle with corners (20, 20) and (80, 80) on widget w:

w.Rectangle(Widget.RED, true, 20, 20, 80, 80);

RemoveAllWidgetItems()

Description

Removes any WidgetItems from the Widget. Also see Widget.AddWidgetItem and Widget.RemoveWidgetItem.

Arguments

No arguments

Return type

No return value

Example

To remove all WidgetItems from widget w:

w.RemoveAllWidgetItems();

RemoveWidgetItem(item[WidgetItem])

Description

 $Removes\ a\ \underline{WidgetItem}\ from\ the\ \underline{Widget}.\ Also\ see\ \underline{Widget.AddWidgetItem}\ and\ \underline{Widget.RemoveAllWidgetItems}.$

Arguments

Name	Type	Description
item	WidgetItem	WidgetItem to remove

Return type

No return value

Example

To remove WidgetItem wi from widget w:

w.RemoveWidgetItem(wi);

ShiftPressed() [static]

Description

Check to see if the Shift key is pressed

Arguments

No arguments

Return type

true/false

Example

To test if someone has the Shift key pressed:

```
if (Widget.ShiftPressed()) { ... }
```

Show()

Description

Shows the widget on the screen

Arguments

No arguments

Return type

No return value

Example

To show widget w:

```
w.Show();
```

Static()

Description

<u>Windows</u> have two different regions for <u>Widgets</u>. A 'normal' region which can be scrolled if required (if the window is made smaller scrollbars will be shown which can be used to scroll the contents) and a 'static' region at the top of the <u>Window</u> which is fixed and does not scroll. For an example of a static region in a <u>Window</u> see any of the keyword editing panels. The 'Dismiss', 'Create', 'Reset' etc buttons are in the static region. By default <u>Widgets</u> are put into the normal region of the <u>Window</u>. This method puts the <u>Widget</u> to the static region of the <u>Window</u>.

Arguments

No arguments

Return type

No return value

Example

To put widget w in the static part of the window:

```
w.Static();
```

StringLength(text[string], monospace (optional)[boolean], fontSize (optional)[integer]) [static]

Description

Returns the length of a string in Widget units. This can be used to find what size a Widget must be to be able to display the string.

Name	Type	Description
text	string	Text to find the width of
monospace (optional)		If true then width will be calculated using a monospace font. If false (default) then the normal proportional width font will be used
fontSize (optional)		Calculation can be based on a defined font size, at the moment support is added only for font sizes of 6, 7, 8, 10, 12, 14, 18 and 24.

Return type

integer

Example

To get the width of string 'Example':

var len = Widget.StringLength('Example');

Tick(colour (optional)[constant])

Description

Draws a tick symbol on the widget. Only possible for Widget.LABEL and Widget.BUTTON widgets.

Arguments

Name	Type	Description
colour (optional)	constant	Colour of tick symbol. See <u>foreground</u> for colours. If omitted, current foreground colour is used.

Return type

no return value

Example

To draw a red tick symbol on widget w:

w.Tick(Widget.RED);

TotalItems()

Description

Returns the number of the $\underline{\text{WidgetItem}}$ objects used in this Widget (or 0 if none used). See also $\underline{\text{Widget.ItemAt()}}$ and $\underline{\text{Widget.WidgetItems()}}$.

Arguments

No arguments

Return type

integer

Example

To return the total number of WidgetItems used for Widget w

var total = w.TotalItems();

WidgetItems()

Description

Returns an array of the $\underline{\text{WidgetItem}}$ objects used in this Widget (or null if none used). See also $\underline{\text{Widget.ItemAt()}}$ and $\underline{\text{Widget.TotalItems()}}$.

Arguments

No arguments

Return type

Array of WidgetItem objects

Example

To return WidgetItems used for Widget w

var wi = w.WidgetItems();

WidgetItem class

The WidgetItem class allows you to create items for combobox and listbox Widgets. More...

WidgetItem properties

Name	Туре	Description
background	constant	Widget background colour. Can be: Widget.BLACK, Widget.WHITE, Widget.RED, Widget.GREEN, Widget.BLUE, Widget.CYAN, Widget.MAGENTA, Widget.YELLOW, Widget.DARKRED, Widget.DARKGREEN, Widget.DARKBLUE, Widget.GREY, Widget.DARKGREY, Widget.LIGHTGREY or Widget.DEFAULT
foreground	constant	Widget foreground colour. Can be: Widget.BLACK, Widget.WHITE, Widget.RED, Widget.GREEN, Widget.BLUE, Widget.CYAN, Widget.MAGENTA, Widget.YELLOW, Widget.DARKRED, Widget.DARKGREEN, Widget.DARKBLUE, Widget.GREY, Widget.DARKGREY, Widget.LIGHTGREY or Widget.DEFAULT
hover	string	WidgetItem's hover text
index (read only)	integer	The index of this widgetitem in the parent widget (undefined if widgetitem is not assigned to a widget).
monospace	boolean	true if the widgetitem uses a monospace font instead of a proportional width font (default).
onClick	function	Function to call when a widget item in a <u>COMBOBOX</u> or <u>LISTBOX</u> widget is clicked. The Widgetitem object is accessible in the function using the 'this' keyword.
onMouseOver	function	Function to call when the mouse moves over a widget item in a <u>COMBOBOX</u> or <u>LISTBOX</u> widget. The Widgetitem object is accessible in the function using the 'this' keyword.
selectable	logical	If the widget item can be selected (true) or not (false).
selected	logical	If the widget item is selected (true) or not (false).
text	string	Widget text
widget (read only)	object	The widget that this item is defined for (null if not set)

Detailed Description

The WidgetItem class allows you to create items for combobox and listbox Widgets in a Window for a graphical user interface. The following example shows how WidgetItems are used to create a Combobox Widget and how to assign callbacks to determine when the selection has been changed.

```
var items = ["D3PLOT", "PRIMER", "SHELL", "REPORTER", "T/HIS"]
// Create window
var w = new Window("Combobox example", 0.8, 1.0, 0.5, 0.6);
// A simple combobox with a few items
var cl= new Widget(w, Widget.LABEL, var cb= new Widget(w, Widget.COMBOBOX, // Add WidgetItems to Combobox
                                              1, 30, 1, 7, "Programs:");
                                               31, 61, 1, 7);
for (i=0; i<items.length; i++)</pre>
     var wi = new WidgetItem(cb, items[i]);
// A combobox with many items showing a slider.
var li= new Widget(w, Widget.LABEL, 1, 30, 8, 14, "Long list:");
var ci= new Widget(w, Widget.COMBOBOX, 31, 61, 8, 14);
// Add WidgetItems to Combobox
// As an example we also make some of the WidgetItems unselectable and
// change the background colour
for (i=1; i<=100; i++)</pre>
     var wi = new WidgetItem(ci, "Item "+i);
     if ((i % 10) == 5)
         wi.selectable = false;
         wi.background = Widget.WHITE;
var e = new Widget(w, Widget.BUTTON,
                                               1, 21, 15, 21, "Exit");
// Assign callbacks
```

```
cb.onClick = clicked;
cb.onChange = changed;
ci.onClick = clicked;
ci.onChange = changed;
e.onClick
       = confirm exit
// Show the window and start event loop
w.Show();
function clicked()
\dot{}// If combobox is clicked then print the current selection
   if (this.selectedItem)
      Message("selection is currently '"+this.selectedItem.text+"'");
function changed()
\dot{/}/ If combobox selection is changed then print the new selection
   if (this.selectedItem)
      Message("selection is now '"+this.selectedItem.text+"'");
function confirm exit()
// Map confirm box
   var ret = Window.Question("Confirm exit", "Are you sure you want to quit?");
// If the user has answered yes then exit from the script.
   if (ret == Window.YES) Exit();
```

See the documentation below and the Window and Widget classes for more details.

Constructor

new WidgetItem(widget[Widget], text[string], selectable (optional)[boolean])

Description

Create a new WidgetItem object.

Arguments

Name	Type	Description
widget	Widget	<u>Widget</u> that widget item will be created in. This can be null in which case the <u>WidgetItem</u> will be created but not assigned to a <u>Widget</u> . It can be assigned later by using <u>Widget.AddWidgetItem()</u> .
text	string	Text to show on widget item
selectable (optional)	boolean	If the widget item can be selected. If omitted the widget item will be selectable.

Return type

WidgetItem object

Window class

The Window class allows you to create windows for a graphical user interface. More...

Class functions

- BottomBorder()
- Error(title[string], error[string], buttons (optional)[constant])
- GetDirectory(initial (optional)[string])
- GetFile(extension (optional)/string], save (optional)/boolean], initial (optional)/string])
- GetFilename(title[string], message[string], extension (optional)[string], initial (optional)[string], save (optional)[boolean])
- GetFiles(extension (optional)[string])
- GetInteger(title[string], message[string], initial (optional)[integer])
- GetNumber(title[string], message[string], initial (optional)[real])
- GetString(title[string], message[string], initial (optional)[string])
- Information(title[string], info[string], buttons (optional)[constant])
- MasterResolution()
- Message(title/string), message/string), buttons (optional)/constant))
- MiddleBorder()
- Question(title[string], question[string], buttons (optional)[constant])
- RightBorder()
- TopBorder()
- UpdateGUI()
- Warning(title[string], warning[string], buttons (optional)[constant])

Member functions

- Delete()
- Hide()
- Recompute()
- Redraw()
- Show(modal (optional)/boolean)

Window constants

Name	Description
Window.CANCEL	Show CANCEL button
Window.NO	Show NO button
Window.NONMODAL	Allow Window.Error, Window.Question, Window.Warning etc windows to be non modal
Window.OK	Show OK button
Window.YES	Show YES button

Constants for Resizing/positioning

Name	Description
Window.BOTTOM	Bottom resizing/positioning of window
Window.CENTRE	Centre (horizontal) positioning of window
Window.LEFT	Left resizing/positioning of window
Window.MIDDLE	Middle (vertical) positioning of window
Window.REDUCE	Window is allowed to reduce in size when resizing
Window.RIGHT	Right resizing/positioning of window
Window.TOP	Top resizing/positioning of window

Window properties

Name	Type	Description
active	boolean	If true (default) then the window then the window is active and widgets in the window can be used. If false then the window is inactive and the widgets cannot be used.

background	constant	Window background colour. Can be: Widget.BLACK, Widget.WHITE, Widget.RED, Widget.GREEN, Widget.BLUE, Widget.CYAN, Widget.MAGENTA, Widget.YELLOW, Widget.DARKRED, Widget.DARKGREEN, Widget.DARKBLUE, Widget.GREY, Widget.DARKGREY, Widget.DARKGREY, Widget.DARKGREY, Widget.DARKGREY, Widget.DARKGREY, Widget.DARKGREY, Widget.DEFAULT
bottom	real	bottom coordinate of window in range 0.0 (bottom) to 1.0 (top)
height	real	height of window
keepOnTop	boolean	If true then the window will be kept "on top" of other windows. If false (default) then the window stacking order can be changed.
left	real	left coordinate of window in range 0.0 (left) to 1.0 (right)
maxWidgets (read only)	integer	The maximum number of widgets that can be made in this window. This can be changed before the window is created by using Options.max_widgets. Also see totalWidgets
onAfterShow	function	Function to call after a Window is shown. The Window object is accessible in the function using the 'this' keyword. This may be useful to ensure that certain actions are done after the window is shown. It can also be used to show another window so this enables multiple windows to be shown. To unset the function set the property to null.
onBeforeShow	function	Function to call before a Window is shown. The Window object is accessible in the function using the 'this' keyword. This may be useful to ensure that buttons are shown/hidden etc before the window is shown. Note that it cannot be used to show another window. Use <u>onAfterShow</u> for that. To unset the function set the property to null.
onClose	function	Function to call when a Window is closed by pressing the X on the top right of the window. The Window object is accessible in the function using the 'this' keyword. To unset the function set the property to null.
resize	constant	Window resizing. By default when a Window is shown it is allowed to resize on all sides (left, right, top and bottom) to try to make enough room to show the <u>Widgets</u> . The behaviour can be changed by using this property. It can be any combination (bitwise OR) of <u>Window.LEFT</u> , <u>Window.RIGHT</u> , <u>Window.TOP</u> or <u>Window.BOTTOM</u> or 0. In addition <u>Window.REDUCE</u> can also be added to allow the window to reduce in size when resizing. Note that when <u>Window.Show</u> is called this property is set to 0 (i.e. not to resize on any side).
right	real	right coordinate of window in range 0.0 (left) to 1.0 (right)
showClose	boolean	If true (default) then a close (X) button will automatically be added on the top right of the window. If false then no close button will be shown.
shown (read only)	boolean	true if window is currently shown, false if not
title	string	Window title
top	real	top coordinate of window in range 0.0 (bottom) to 1.0 (top)
totalWidgets (read only)	integer	The total number of widgets that have been made in this window. This can be changed before the window is created by using Options.max_widgets. Also see maxWidgets
width	real	width of window

Detailed Description

The Window class allows you to make windows that you can place <u>Widgets</u> in to create a graphical user interface. The Widget class also gives a number of static methods for convenience. e.g. <u>Window.GetInteger()</u>. The following very simple example displays some text in a window with a button that unmaps the window when it is pressed and the user confirms that (s)he wants to exit.

```
// Create window with title "Text" from 0.8-1.0 in x and 0.5-0.6 in y
var w = new Window("Text", 0.8, 1.0, 0.5, 0.6);
// Create label widget
var l = new Widget(w, Widget.LABEL, 1, 40, 1, 7, "Press OK to exit");
// Create button widget
var e = new Widget(w, Widget.BUTTON, 11, 30, 8, 14, "OK");
// Assign the onClick callback method to the function confirm_exit'
e.onClick = confirm_exit;
// Show the widget and start event loop
w.Show();
```

See the documentation below and the Widget class for more details.

Constructor

new Window(title[string], left[real], right[real], bottom[real], top[real])

Description

Create a new Window object.

Arguments

Name	Туре	Description
title	string	Window title to show in title bar
left	real	left coordinate of window in range 0.0 (left) to 1.0 (right)
right	real	right coordinate of window in range 0.0 (left) to 1.0 (right)
bottom	real	bottom coordinate of window in range 0.0 (bottom) to 1.0 (top)
top	real	top coordinate of window in range 0.0 (bottom) to 1.0 (top)

Return type

Window object

Example

To create a Window 'Example' in the top right half of the screen:

```
var w = new Window('Example', 0.5, 1.0, 0.5, 1.0);
```

Details of functions

BottomBorder() [static]

Description

Returns the vertical position of the bottom border (in range 0-1). This can be used to help position windows on the screen.

Arguments

No arguments

Return type

float in range 0-1

Example

To obtain the position of the bottom border:

```
var b = Window.BottomBorder();
```

Delete()

Description

Deletes the window from T/HIS and returns any memory/resources used for the window. **This function should not normally need to be called**. However, in exceptional circumstances if a script recreates windows many times T/HIS may run out of USER objects on Microsoft Windows because of the way \${program} creates and shows windows. To avoid this problem this method can be used to force T/HIS to return the resources for a window. **Do not use the Window object after calling this method**.

Arguments

No arguments

Return type

No return value

Example

To delete window w:

w.Delete();

Error(title[string], error[string], buttons (optional)[constant]) [static]

Description

Show an error message in a window.

Arguments

Name	Type	Description
title	string	Title for window.
error	string	Error message to show in window. The maximum number of lines that can be shown is controlled by the Options.max_window_lines option.
buttons (optional)	constant	The buttons to use. Can be bitwise OR of <u>Window.OK</u> , <u>Window.CANCEL</u> , <u>Window.YES</u> or <u>Window.NO</u> . If this is omitted an OK button will be used. By default the window will be modal. If <u>Window.NONMODAL</u> is also given the window will be non-modal instead.

Return type

Button pressed

Example

To show error Critical error!\nAbort? in window with title Error with Yes and No buttons:

```
var answer = Window.Error("Error", "Critical error!\nAbort?", Window.YES |
Window.NO);
if (answer == Window.YES) Exit();
```

GetDirectory(initial (optional)[string]) [static]

Description

Map the directory selector box native to your machine, allowing you to choose a directory. On Unix this will be a Motif selector. Windows will use the standard windows directory selector.

Arguments

Name	Type	Description
initial (optional)	string	Initial directory to start from.

Return type

directory (string), (or null if cancel pressed).

Example

To select a directory:

var dir = Window.GetDirectory();

GetFile(extension (optional)[string], save (optional)[boolean], initial (optional)[string]) [static]

Description

Map a file selector box allowing you to choose a file. See also Window.GetFiles() and Window.GetFilename().

Arguments

Name	Type	Description
extension (optional)	string	Extension to filter by.
save (optional)	boolean	If true the file selector is to be used for saving a file. If false (default) the file selector is for opening a file. Due to native operating system file selector differences, on linux new filenames can only be given when saving a file. On windows it is possible to give new filenames when opening or saving a file.
initial (optional)	string	Initial directory to start from.

Return type

filename (string), (or null if cancel pressed).

Example

To select a file using extension '.key':

var file = Window.GetFile(".key");

GetFilename(title[string], message[string], extension (optional)[string], initial (optional)[string], save (optional)[boolean]) [static]

Description

Map a window allowing you to input a filename (or select it using a file selector). OK and Cancel buttons are shown. See also $\underline{\text{Window}.\text{GetFile}()}$.

Arguments

Name	Type	Description
title	string	Title for window.
message	string	Message to show in window.
extension (optional)	string	Extension to filter by.
initial (optional)	string	Initial value.
save (optional)	boolean	If true the file selector is to be used for saving a file. If false (default) the file selector is for opening a file. Due to native operating system file selector differences, on linux new filenames can only be given when saving a file. On windows it is possible to give new filenames when opening or saving a file.

Return type

filename (string), (or null if cancel pressed).

Example

To create an file input window with title *Choose file* and message *Choose the file to open* and return the filename input: var filename = Window.GetFilename("Choose file", "Choose the file to open");

GetFiles(extension (optional)[string]) [static]

Description

Map a file selector box allowing you to choose multiple files. See also Window.GetFile() and Window.GetFilename().

Arguments

Name	Type	Description
extension (optional)	string	Extension to filter by.

Return type

Array of filenames (strings), or null if cancel pressed.

Example

```
To select multiple files using extension '.key':
var files = Window.GetFiles(".key");
```

GetInteger(title/string), message/string), initial (optional)/integer() [static]

Description

Map a window allowing you to input an integer. OK and Cancel buttons are shown.

Arguments

Name	Type	Description
title	string	Title for window.
message	string	Message to show in window.
initial (optional)	integer	Initial value.

Return type

value input (integer), or null if cancel pressed.

Example

To create an input window with title *Input* and message *Input integer* and return the value input:

```
var value = Window.GetInteger("Input", "Input integer");
```

GetNumber(title[string], message[string], initial (optional)[real]) [static]

Description

Map a window allowing you to input a number. OK and Cancel buttons are shown.

Name	Type	Description
title	string	Title for window.
message	string	Message to show in window.
initial (optional)	real	Initial value.

Return type

value input (float), or null if cancel pressed.

Example

To create an input window with title Input and message Input number and return the value input:

```
var value = Window.GetNumber("Input", "Input number");
```

GetString(title[string], message[string], initial (optional)[string]) [static]

Description

Map a window allowing you to input a string. OK and Cancel buttons are shown.

Arguments

Name	Type	Description
title	string	Title for window.
message	string	Message to show in window.
initial (optional)	string	Initial value.

Return type

value input (string), or null if cancel pressed.

Example

To create an input window with title Input and message Input string and return the value input:

```
var value = Window.GetString("Input", "Input string");
```

Hide()

Description

Hides (unmaps) the window.

Arguments

No arguments

Return type

No return value

Example

To hide window w:

w.Hide();

Information(title[string], info[string], buttons (optional)[constant]) [static]

Description

Show information in a window.

Arguments

Name	Type	Description
title	string	Title for window.
info	string	Information to show in window. The maximum number of lines that can be shown is controlled by the Options.max_window_lines option.
buttons (optional)	constant	The buttons to use. Can be bitwise OR of <u>Window.OK</u> , <u>Window.CANCEL</u> , <u>Window.YES</u> or <u>Window.NO</u> . If this is omitted an OK button will be used. By default the window will be modal. If <u>Window.NONMODAL</u> is also given the window will be non-modal instead.

Return type

Button pressed

Example

To show information Information in window with title Example with OK and Cancel buttons:

```
var answer = Window.Information("Example", "Information", Window.OK |
Window.CANCEL);
if (answer == Window.CANCEL) Message("You pressed the Cancel button");
```

MasterResolution() [static]

Description

Returns the resolution of the master programme window in pixels

Arguments

No arguments

Return type

Array of numbers containing x and y resolution in pixels

Example

To get the resolution of the main window:

```
var res = Window.MasterResolution();
```

Message(title[string], message[string], buttons (optional)[constant]) [static]

Description

Show a message in a window.

Arguments

Name	Type	Description
title	string	Title for window.
message	string	Message to show in window. The maximum number of lines that can be shown is controlled by the Options.max_window_lines option.
buttons (optional)	constant	The buttons to use. Can be bitwise OR of Window.OK, Window.CANCEL, Window.YES or Window.NO. If this is omitted an OK button will be used By default the window will be modal. If Window.NONMODAL is also given the window will be non-modal instead.

Return type

Button pressed

Example

To show message Press YES or NO in window with title Example with YES and NO buttons:

```
var answer = Window.Message("Example", "Press YES or NO", Window.YES |
Window.NO);
if (answer == Window.NO) Message("You pressed No");
```

MiddleBorder() [static]

Description

Returns the vertical position of the middle border (in range 0-1). The middle border is the border between the tools/keywords window and the docked windows. This can be used to help position windows on the screen.

Arguments

No arguments

Return type

float in range 0-1

Example

To obtain the position of the middle border:

```
var b = Window.MiddleBorder();
```

Question(title[string], question[string], buttons (optional)[constant]) [static]

Description

Show a question in a window.

Arguments

Name	Type	Description
title	string	Title for window.
question	string	Question to show in window. The maximum number of lines that can be shown is controlled by the Options.max_window_lines option.
buttons (optional)	constant	The buttons to use. Can be bitwise OR of <u>Window.OK</u> , <u>Window.CANCEL</u> , <u>Window.YES</u> or <u>Window.NO</u> . If this is omitted Yes and No button will be used. By default the window will be modal. If <u>Window.NONMODAL</u> is also given the window will be non-modal instead.

Return type

Button pressed

Example

To show question *Do you want to continue?* in window with title *Question*:

```
var answer = Window.Question("Question", "Do you want to continue?");
if (answer == Window.NO) Message("You pressed No");
```

Recompute()

Description

Recomputes the positions of widgets in the window. If you have <u>static</u> widgets and 'normal' widgets in a window and you show and/or hide widgets the window needs to be recomputed to refresh the graphics, scroll bars etc. Calling this method will recompute and redraw the window.

No arguments

Return type

No return value

Example

To recompute window w:

w.Recompute();

Redraw()

Description

Redraws the window. Sometimes if you <u>show</u>, <u>hide</u> or draw graphics on <u>widgets</u> the window needs to be redrawn to refresh the graphics. Calling this method <u>will</u> redraw the window refreshing the graphics.

Arguments

No arguments

Return type

No return value

Example

To redraw window w:

w.Redraw();

RightBorder() [static]

Description

Returns the horizontal position of the right border (in range 0-1). This can be used to help position windows on the screen.

Arguments

No arguments

Return type

float in range 0-1

Example

To obtain the position of the right border:

```
var b = Window.RightBorder();
```

Show(modal (optional)[boolean])

Description

Shows (maps) the window and waits for user input.

Name	Type	Description
modal (optional)		If this window is modal (true) then the user is blocked from doing anything else in T/HIS until this window is dismissed). If non-modal (false) then the user can still use other functions in T/HIS. If omitted the window will be modal. Note that making a window modal will stop interaction in all other windows and may prevent operations such as picking from working in any macros that are run from scripts.

Return type

No return value

Example

To show window w:

w.Show();

To show window w allowing the user to use other functions in T/HIS:

w.Show(false);

TopBorder() [static]

Description

Returns the vertical position of the top border (in range 0-1). This can be used to help position windows on the screen. This is no longer used in T/HIS and will always be 1 but is left for backwards compatibility.

Arguments

No arguments

Return type

float in range 0-1

Example

To obtain the position of the top border:

var b = Window.TopBorder();

UpdateGUI() [static]

Description

Force GUI to be updated. This function is not normally needed but if you are doing a computationally expensive operation and want to update the GUI it may be necessary as the GUI update requests are cached until there is spare time to update them. Calling this function forces any outstanding requests to be flushed.

Arguments

No arguments

Return type

No return value

Example

To force update of GUI:

Window.UpdateGUI();

Warning(title[string], warning[string], buttons (optional)[constant]) [static]

Description

Show a warning message in a window.

Arguments

Name	Type	Description
title	string	Title for window.
warning	string	Warning message to show in window. The maximum number of lines that can be shown is controlled by the Options.max_window_lines option.
buttons (optional)	constant	The buttons to use. Can be bitwise OR of <u>Window.OK</u> , <u>Window.CANCEL</u> , <u>Window.YES</u> or <u>Window.NO</u> . If this is omitted an OK button will be used. By default the window will be modal. If <u>Window.NONMODAL</u> is also given the window will be non-modal instead.

Return type

Button pressed

Example

To show warning *Title is blank\nSet to ID*? in window with title *Warning* with Yes and No buttons:

```
var answer = Window.Warning("Warning", "Title is blank\nSet to ID?", Window.YES
| Window.NO);
if (answer == Window.NO) Message("You pressed No");
```

XMLParser class

The XMLParser class enables reading data from XML files. More...

Member functions

• Parse(filename[string])

XMLParser properties

Name	Type	Description	
characterDataHandler	function	Function to call when character data is found. The function will be called with 1 argument which is a string containing the character data	
commentHandler	function	Function to call when a comment is found. The function will be called with 1 argument which is a string containing the text inside the comment	
endCDATAHandler	function	Function to call at the end of a CDATA section. The function does not have any arguments.	
endElementHandler	function	Function to call when an element end tag is found. The function will be called with 1 argument which is a string containing the name of the element	
startCDATAHandler	function	Function to call at the start of a CDATA section. The function does not have any arguments.	
startElementHandler	function	Function to call when an element start tag is found. The function will be called with 2 arguments. Argument 1 is a string containing the name of the element. Argument 2 is an object containing the element attributes	

Detailed Description

The XMLParser class provides a stream-oriented parser to enable you to read XML files. You register callback (or handler) functions with the parser and then parse the document. As the parser recognizes parts of the document, it will call the appropriate handler for that part (if you've registered one.) The document is fed to the parser in pieces. This allows you to parse really huge documents that won't fit into memory.

There are currently 6 handlers which can be set: XMLParser.startElementHandler, XMLParser.endElementHandler, XMLParser.characterDataHandler, XMLParser.commentHandler, XMLParser.startCDATAHandler and XMLParser.endCDATAHandler.

The following simple example shows how the parser could be used.

```
// Create a new parser object
var p = new XMLParser();
// assign handlers
p.startElementHandler = startElem;
p.endElementHandler
                    = endElem;
p.characterDataHandler = text;
p.commentHandler
                     = comment;
// parse the file
p.Parse("/data/test.xml");
function startElem(name, attr)
// handler to be called when a start element is found
// Print element name
    Println("START:
                  " + name);
// Print attributes
   for (n in attr)
       Println(" attr: " + n + "=" + attr[n]);
function endElem(name)
  handler to be called when an end element is found
  Print element name
   Println("END: " + name);
function text(str)

angle/ handler to be called when text is found
```

```
// Print text
    Println("TEXT: '" + str + "'");
}
function comment(str)
{
// handler to be called when a comment is found
// Print comment
    Println("COMMENT: '" + str + "'");
}
```

See the documentation below for more details.

Constructor

new XMLParser()

Description

Create a new XMLParser object for reading XML files.

Arguments

No arguments

Return type

XMLParser object

Example

```
To create a new XMLParser object to read XML file "/data/test/file.xml" var p = new XMLParser("/data/test/file.xml");
```

Details of functions

Parse(filename[string])

Description

starts parsing an XML file

Arguments

Name	Type	Description	
filename	string	XML file to parse	

Return type

No return value

Example

```
To parse XML file "/data/test.xml"

var p = new XMLParser();
p.parse("/data/test.xml");
```

APPENDIX K - Typed Commands

I/ 4 Olabal Maray		
K.1 Global Menu		
PL - Plot	CL - Clear Screen	
ZM - Zoom	AU - Auto Scale Plot	
CE - Centre	PT - Point on Screen	
PF - Write Postscript file (use default)		
PC - Write Postscript file (Colour)		
PB - Write Postscript file (Blank/White)		
BL - Blank Curve	UB - Unblank Curve	
RM - Remove a Curve	ER - Erase all curves	
GS - Global Status	CO - Condense Curves	
Y1 - 1st Y axis	Y2 - Second Y axis	
DOU - Double Y axis (ON/ OFF)		
CF - Command file (read)	SF - Session file (write)	
CS - Close session file		
EX - Exit		
! - Backspace	/ - Top level menu	
Q - Abort operation		
; - End of command string	<u> </u>	<u> </u>

K.2 List Commands	
LS - List all files in current directory	C - List all files "*.cur" in current directory
LB - List all files "*.bdf" in current directory	LK - List all files "*.key" in current directory
LI - List all files ASCII files in current directory	

GM Global Manu	
LTML = LTIONAL MICHIL	

MO - Model options	RE <file> - Read Model</file>	Files		
	DA - Read Data from	GL <component> - Globa data</component>		
	model	PA <id> <component> - Part data</component></id>		
		NO <id> <component> - Node data</component></id>		
		SO <id> <component> - Solid data</component></id>		
		BE <id> <component> - Beam data</component></id>		
		SH <id> <component> - Shell data</component></id>		
		TS <id> <component> - Thick Shell data</component></id>		
		WA <id> <component> - Part data</component></id>		
		SPR <id> <component> - Spring data</component></id>		
		SEA <id> <component> - Seatbelt data</component></id>		
		RET <id> <component> - Retractor data</component></id>		
		SL <id> <component> - Slipring data</component></id>		
		CO <id> < component> - Contact data</id>		
		REA <id> <component> - Reaction data</component></id>		
		Al <id> <component> - Airbag data</component></id>		
		JO <id> <component> - Joint data</component></id>		
		SEC <id> <component> - Section data</component></id>		
		SU <id> <component> - Subsystem data</component></id>		
		P_G <id> <component> - Part Group data</component></id>		
		G_C <id> <component> - Geometrical Contact</component></id>		
		data		
		RI <id> <component> - Rigid Body data</component></id>		
		SPO <id> <component> - Spotweld data</component></id>		
		SPC <id> <component> - SPC data</component></id>		
		FS <id> <component> - Fluid structural</component></id>		
		interaction data		
		BO <id> <component> - Boundary condition data</component></id>		
		SPH <id> <component> - SPH data</component></id>		
	SE - Select Models			
	DE - Delete Models			
	List Models			
RE - Read data	SU - Set Surface CU - Read T/HIS curve f	310		
RE - Read data		urve file (ignore any style definitions)		
	BD - Read Bulk data file			
		NA KEYWORD input file		
		KY - Input curve from keyboard		
		d		
		CSV - Read a CSV file (X,Y,X,Y,X,Y) CSV2 - Read a CSV file (X,Y, Y,Y,Y,Y)		
	SO - Read ISO curve da			
WR - Write options	WR - Write curve file	SO2 - Read ISO curve data (single channel)		
White options		WA - Write all curves to a T/HIS curve file		
		KEY - Write curves to a LS-DYNA Keyword file		
	CSV - Write curves to a CSV file (X,Y,X,Y,X,Y)			
	CSV2 - Write curves to a CSV file (X,Y, Y,Y,Y,Y)			
	LI - List curve data on screen			
	RE - Report curve data to file			
	SU - Sumary of curve			
	ST - Status			
.	Daits			

DE - Defaults	AU - Auto Scaling	ON - Autoscaling on			
	Tato Seaming	OFF - Autoscaling off			
		DX - Define new x limits (minimum,maximum)			
		XMN - Define new minimum x limit			
		XMX - Define new maximum x limit			
		DY - Define new y limit (min,max)			
		YMN - Define new minimum y limit			
		YMX - Define new maximun y limit			
		2DY - Define new second y axis limits (min,max)			
		YMN2 - Define new minimum second y limit			
		YMX2 - Define new maximum second y limit			
		ST - Status			
	TI - Title	DT - Status			
	LA - Axes labels (user	AU - Use automatic axes labels (both)			
	defined)	AX - Use automatic x axis labels			
	,	AY - Use automatic y axis labels			
		2AY - Use automatic 2nd y axis labels			
		DX - Define new x axis plot label			
		DY - Define new y axis plot label			
		2DY - Define new 2nd y axis plot label			
		ST - Status			
	AW - Axis line width				
	AX - Axis types				
	AC - Axis Colour	lan =			
	GR - Grid lines	ON - Turn grid on			
		OFF - Turn grid off			
		AX - Automatic x-axis grid intervals			
		AY - Automatic y-axis grid intervals			
		MX - Manual x-axis grid intervals			
		MY - Manual y-axis grid intervals			
		X - Define x-axis grid intervals			
		Y - Define y-axis grid intervals			
		OX - Define x-axis grid offset			
		OY - Define y-axis grid offset			
		TH - Define grid line thickness			
	GW - Grid width				
	UL - User Line				
	LL - Line labels	leu			
	MP - Model Prefix	ON - Turn model prefix on			
		OFF - Turn model prefix off			
		AUTO - Add prefix if more than one model			
	PR - Prefix Format	D- Model ID			
		DIR - Model directory			
		THF - Root of THF filename			
		USER - User defined			
	PF - Plot format				
	WX - Window size (x) "	pixels"			
	WY - Window size (y) "	pixels"			
	RV - Reverse Foregorun	•			
	FO - Foreground Colour				
	BA - Background Colou				
		·			
		CU - Curve through points ON/OFF			
	-	SY - Symbols ON/OFF			
		BD - Border ON/OFF			
		BW - Border width			
		BC - Border Colour			
		LW - Default line width SMN - Show minimum value			
		SMX - Show maximum value XMN - Label x value at minimum			
		LXMN - Label x value at minimum LYMN - Label y value at minimum			
	LAMA - Label x value a	LXMX - Label x value at maximum			

	LYMX - Label y value at maximum
	RE - Reset to defaults
	ST - Status
FO - Font	TI <size> <colour> - Title</colour></size>
	XL <size> <colour> - X Axis Label</colour></size>
	XU <size> <colour> - X Axis Units</colour></size>
	YL <size> <colour> - Y Axis Label</colour></size>
	YU <size> <colour> - Y Axis Units</colour></size>
	Y2L <size> <colour> - 2nd Y Axis Label</colour></size>
	Y2U <size> <colour> - 2nd Y Axis Units</colour></size>
	LE <size> <colour> - Curve Legend</colour></size>
ED commo ID. Etic di	ALL <size> <colour> - All labels</colour></size>
ED <curve id=""> - Edit option</curve>	F - move Forward next 16 lines
	B - move Back 16 lines
	T - move to Top of curve
	E - move to End of curve
	n(umber) - move to line n
	Cn - Change line n
	n - Insert before line n
	An - Append after line n
	D n1 n2 - Delete from line n1 to n2
	L - change Line label
	R - Reset edited curve back to original
	W or S - write curve
	PE - Plot Edited curve
	PA - Plot Edited And original curve
	PL - PLot stored T/HIS curves
	Q - Quit the editor
OP - Operate	ADX/Y - Add
	MUX/Y - Multiply
	SUX/Y - Subtract
	DIX/Y - Divide
	CAT - Concatenate 2 curves
	MAP - Map one curve onto another
	COM - Combine curves
	ERR - Error functions
	NT - Integrate
	DIF - Differentiate
	SMO - Smooth
	LSQ - Least squares fit
	SQR - Square root
	NOR - Normalise
	REC - Reciprocal
	ABS - Absolute values
	TRA - Translate
	REV - Reverse
	CLP - Clip
	ZERO - Translate the curve to (0,0)
	ORDER - Reverse the order of the curve points
	VEC - Vector magnitude
	VEC2 - Vector Magnitude (2D)
	SUM - Sum of 'n' curves
	ENV - Envelope of 'n' curves
	MIN - Minimum of 'n' curves
	MAX - Maximum of 'n' curves
	AVE - Average of 'n' curves
	R-AV - Rolling Average of 'n' curves
	STR - Convert stress/strain curve

AM - Automotive options	C60 - Class 60 filter
	C180 - Class 180 filter
	C600 - Class 600 filter
	C1000 - Class 100 filter
	BUT - Butterworth filter
	FIR - FIR filter HIC - HIC value
	HIC - HIC value HICD - HIC(d) value
	CLI - 3ms Clip value
	EXC - Exceedence Plot
	VC - Viscous Criteria (ECER95)
	VC2 - Viscous Criteria (IIHS)
	ASI - Acceleration Severity Index (BS EN 1317-1:1998)
	ASI2 - Acceleration Severity Index (BS EN 1317-1:2010)
	THIV - Theoretical Head Impact Velocity
	NIJ - Neck Injury
	TTI - Thoracic Trauma Index
	NOR - Normalise
	REG - Regularise
	VEC - Vector Magnitude
	VEC2 - Vector Magnitude (2D)
	ACU - Airbag Control Unit
MA Made an and an	
MA - Maths operations	SQRT - Squre Root
	LOG - Natural Log
	EXP - e to power of
	LOG10 - Log to base 10
	** - To raise to power
	SIN - Sine
	COS - Cosine
	TAN - Tangent
	ASIN - Arc sine
	ACOS - Arc cosine
	ATAN - Arc tangent
SE - Seismic options	DV - Displacement to velocity spectra
	DA - Displacement to acceleration spectra
	VD - Velocity to displacement spectra
	VA - Velocity to acceleration spectra
	AD - Acceleration to displacement spectra
	AV - Acceleration to velocity spectra
	DS - Produce a design spectrum from a response spectrum
	RS - Produce response spectra from input accelerations
	FFT - Fast fourier transformation
UT - Utility functions	CL - Colour laser output
	GL - Greyscale laser output
	LW - Line width
	SA - Solid axes (x=0 & y=0 axes solid)
ST - Line styles	RE - Read in style file
	WR - Write out style file
	DE - Reset styles to default settings
	SET - Set a T/HIS line style
LE XX I	FIX - Turn fix line styles on/off
HE - Help	
CU - Curve editing options	LA - Set a new curve label
	II - Set a new curve title
	XL - Set a new curve x-axis label
	YL - Set a new curve y-axis label
	TA - Set a new curve tag
PGR or GRO - Group options	READ - Read a PART group file
1	LIST - List all PART groups
	DELETE - Delete all PART groups
	Zerete militari Stoupe
	CREATE - Create a new PART group

CGR - Group options	CREATE - Create a curve group	
Group options	LIST - List all curve groups	
	ADD - Add to an existing curve group	
	REMOVE - Remove from an existing curve group	
M - Image output options	JPEG <file> - Capture a JPEG image</file>	
	BMP_U <file> - Capture an uncompressed Bitmap image</file>	
	BMP_C <file> - Capture a compressed Bitmap image</file>	
	PPM <file> Capture a portable pixmap file</file>	
PREF - Define T/HIS user	REG - Set time interval for automatic curve resularising	
preferences	CONV - Set/unset automatic conversion from ms to s when filtering	
	FILE - Turn on/off output of injury criteria values and error calculations to ASCII files	
	SHOW - Turn on/off display of HIC/ 3ms clip values	
	ZERO - Turn on/off automatic creation of (0,0) point when reading data from ASCII files	

Installation organisation

The version 16 installation can be customised to try and avoid a number of issues that often occur in large organisations with many users.

• Large organisations generally imply large networks, and it is often the case that the performance of these networks can be intermittent or poor, therefore it is common practice to perform an installation of the software on the local disk of each machine, rather then having a single installation on a remote disk.

This avoids the pauses and glitches that can occur when running executable files over a network, but it also means that all the configuration files in, or depending upon, the top level "Admin" directory have to be copied to all machines and, more to the point, any changes or additions to such files also have to be copied to all machines.

• In larger organisations the "one person per computer" philosophy may not apply, with the consequence that users will tend to have a floating home area on a network drive and may not use the same machine every day.

This is not usually a problem on Linux where the "home" directory is tied to the login name not the machine. However on Windows platforms it means that %USERPROFILE%, which is typically on the local C drive of a machine, is not a good place to consider as "home" since it will be tied to a given computer, therefore a user who saves a file in his home directory on machine A may not be able to access it from machine B.

• In a similar vein placing large temporary files on the /tmp partition (Linux) or the C: drive (Windows) may result in local disks becoming too full, or quotas exceeded.

This section gives only a brief summary of the installation organisation, and you should refer to the separate Installation Guide if you want to find out more about the details of installation, licensing, and other related issues.

Version 16.0 Installation structure

In version 16.0 the option is provided to separate a top-level 'administration' directory from the 'installation' one where the executables are located.

For large installations on many machines this allows central configuration and administration files to exist in one place only, but executables to be installed locally on users' machines to give better performance. Version 16.0 also allows the following items to be configured

- The location for user manuals and other documentation.
- The definition of a user's home directory.
- The definition of the temporary directory for scratch files.

In addition parsing of the 'oa_pref' (preferences) file will now handle environment variables, so that a generic preference can be configured to give a user-specific result, and preferences may be 'locked' so that those set at the administration level cannot be changed by users.

These changes are entirely optional, and users performing a simple installation on a single machine do not need to make any changes to their existing installation practice.

Directory	Status	Directory Content and purpose	oa_pref file option
OA_ADMIN_xx	Optional	Top level configuration files. (xx = 16 for release 16.0, thus OA_ADMIN_16) Admin level oa_pref file Other configuration files Timeout configuration file	

OA_ADMIN	Optional	Same as OA_ADMIN_16, provided for backwards compatibility with earlier releases. It is recommended that plain OA_ADMIN, without the _xx version suffix, is not used since otherwise there is no easy way of distinguishing between parallel installations of different releases of the Oasys Ltd software in an installation. If OA_ADMIN_16 is not defined then this non-release specific version is checked.	
OA_INSTALL_xx	Optional	(xx =16 for release 16.0, thus OA_ADMIN_16 All executables Installation level oa_pref file	oasys*install_dir: <pathname></pathname>
OA_INSTALL	Optional	Same as OA_INSTALL_16. If no "OA_ADMIN_xx" directory is used and all software is simply placed in this "install" directory, which would be typical of a single-user installation, then it is recommended that the _xx version suffix is used in order to keep parallel installations of different releases of the Oasts Ltd software separate on the machine. If OA_INSTALL_16 is not defined then this non-release specific version is checked	oasys*install_dir: <pathname></pathname>
OA_MANUALS	Optional	Specific directory for user manuals. If not defined then will search in: OA_ADMIN_xx/manuals (xx = major vers number) OA_INSTALL/manuals	oasys*manuals_dir: <pathname> ion</pathname>
OA_HOME	Optional	Specific "home" directory for user when using Oasys Ltd software. If not defined will use: \$HOME (Linux) %USERPROFILE% (Windows)	oasys*home_dir: <pathname></pathname>
OA_TEMP	Optional	Specific "temporary" directory for user when using Oasys Ltd software. If not defined will use: P_tmpdir (Linux, typically C:\temp)	oasys*temp_dir: <pathname> ally /tmp)</pathname>

It will be clear from the table above that no Environment variables have to be set, and that all defaults will revert to pre-9.4 behaviour. In other words users wishing to keep the status quo will find behaviour and layout unchanged if they do nothing.

OA INSTALL XX

Previously the software used the **OA_INSTALL** (renamed from **OASYS**) environment variable to locate the directory the software was installed in.

- On Windows this is no longer required as the software can work out its own installation directory. As this environment variable is no longer required it is recommended that it is removed from machines it is currently set on as in some cases where more than one version has been installed in different directories it can cause problems.
- On LINUX systems the "oasys_16" script that starts the SHELL automatically sets this Environment Variable and passes it to any application started from the SHELL. If you run applications directly from the command line and bypass the SHELL then you should set OA_INSTALL_XX so that the software can locate manuals and other required files.

OA ADMIN XX

Users wishing to separate configuration and installation directories will be able to do so by making use of the new top level **OA_ADMIN_xx** directory.

Installation Examples

The following diagrams illustrate how the installation might be organised in various different scenarios..

a) Single user installation on one machine

There is no need to worry about separating administration and installation directories, and the default installation of all files in and below the single installation directory will suffice.

It is suggested that the **xx** version suffix of **OA_INSTALL_xx** is used in order to keep parallel installations of different releases of the Oassys Ltd software separate on the machine.



Central server

b) A few machines on a small network, each user has his own machine

The top level administration directory can be installed on a network server, possibly also locating the manuals centrally.


Each user's machine has its own 'installation' directory to give good performance, but there is no need to manage home or temporary directories centrally since each user 'owns' his machine.

If network performance is good an alternative would be to install executables on the central server, meaning that local OA_INSTALL directories are not required.

OA_ADMIN_xx Manuals, top level "oa_pref" file OA_INSTALL Executables, local preference file Machine #1 Machine #2

c) Large corporate network

There is no need to worry about separating administration and installation directories, and the default installation of all files in and below the single installation directory will suffice.

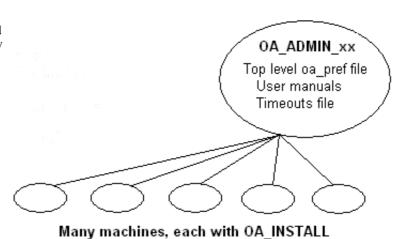

Dynamic configuration using the top level oa_pref file.

A further improvement is that all environment variables below OA_ADMIN_xx may either be set explicitly, or dynamically using the options in the oa_pref file at the top OA_ADMIN_xx level. This permits parallel installations of different versions of the software to co-exist, with only the top level administration directory names being distinct. For example:

Release 16.0	Release 16.1
Top level directory OA_ADMIN_16	Top level directory OA_ADMIN_161
oa_pref file in OA_ADMIN_16 contains:	oa_pref file in OA_ADMIN_161 contains:
oasys*install_dir: <pathname 16.0="" for="" installation=""> oasys*manuals_dir: <pathname 16.0="" for="" manuals=""></pathname></pathname>	<pre>oasys*install_dir:</pre>
<pre>oasys*home_dir: <pathname directory="" for="" home=""> oasys*temp_dir: <pathname files="" for="" temporary=""></pathname></pathname></pre>	} would almost certainly be unchanged between major} versions, although they could be different if desired

Pathnames in the oa pref file may contain environment variables which will be resolved before being applied.

The hierarchy of oa_pref file reading

It will be clear from the above that in a large installation the "oa_pref" files have a significant role. Each piece of software reads them in the following order:

OA_ADMIN_xx	Top level configuration
OA_INSTALL_xx	Installation level
OA_HOME	User's personal "home" file
Current working directory	File specific to the current directory (rarely used)

The rules for reading these files are:

- If a given directory does not exist, or no file is found in that directory, then no action is taken. This is not an error
- A more recently read definition supersedes one read earlier, therefore "local" definitions can supersede "global" ones (unless it was locked).
- If two of more of the directories in the table above are the same then that file is only read once from the first instance.

Locking Preference Options

From version 9.4 onwards preference options can be locked. If a preference option is locked in a file then that preference option will be ignored in any of the subsequent preference files that are read.

Therefore by locking a preference in a top-level file in the hierarchy above, eg in **OA_ADMIN_xx**, and then protecting that file to be read-only, an administrator can set preferences that cannot be altered by users since any definitions of that preference in their private oa_pref files will be ignored.

Preferences are locked by using a hash (#) rather than an asterisk (*) between the code name and the preference string. For example:


primer*maximise: true	Normal case using "*", means an unlocked preference
-----------------------	---

primer#maximise: true Locked case using "#"

These changes may be made either by editing the file manually, or by using the preferences editor.

JaDe: The JavaScript debugger

JaDe is included in D3PLOT, PRIMER and T/HIS to help debug and develop JavaScripts. It is started by selecting a script and pressing the **Debug** button in the JavaScript menu in any of the programs. The initial screen is shown below.

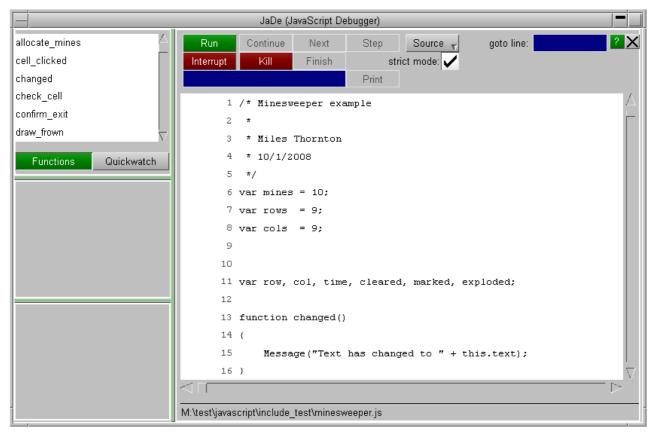

It is fairly basic but hopefully has enough functionality for people to be able to find and fix problems in scripts.

Viewing the script files and functions

The main part of the window shows the script file. If your script is broken up into separate file (by using Use) then you can get a list of the different files and view them by using the **Source** popup. To go to a particular line in the file use the **goto line** textbox.

A list of the functions in the script is shown in the **Functions** menu on the top left. If you want to look at a particular function then click on the function name and the main text window will jump to the correct file and line.

Adding/removing breakpoints

A breakpoint is a line in the script where execution will pause in JaDe. To add a breakpoint either left click on the line you want the breakpoint on or right click on the line and select **Create breakpoint** from the popup. A red circle is then drawn on the line to show that there is an active breakpoint.

```
112 function allocate_mines()
113 {

114     var n = mines;
115
116     while (n)
117     {
```


Additionally the breakpoint will also be added to the list in the breakpoint window (bottom left of JaDe). You can click on this at any time and the main text window will jump to the correct file and line.

Active breakpoints are shown with a red circle. Breakpoints can be activated/deactivated by clicking on the line again. Unactive breakpoints are shown as a grey circle instead of a red one. They are also shown in grey text in the breakpoint window.

To delete a breakpoint right click on the line and select **Delete breakpoint**. The breakpoint will be deleted.

Conditional breakpoints

Sometimes it is useful to only stop at a breakpoint if a certain condition is met. For example in the above example we may only want to stop at line 114 if mines is 10. You can do this by right clicking on the the breakpoint and selecting **Add condition**.

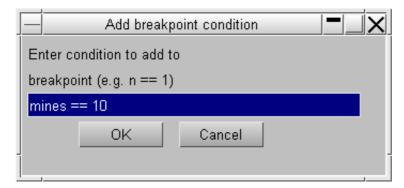

A window is mapped allowing you type in the condition you want to try to meet. The condition should be a JavaScript expression which evaluates to true if you want the breakpoint to stop execution, or false if you want the breakpoint to be skipped. In this example the condition is n = 10.


If a breakpoint has a condition associated with it a C is drawn on the circle and in the breakpoint window. The condition can be edited again or removed by right clicking on the breakpoint and selecting either **Edit condition** or **Remove condition** from the popup.

Running the script

Running the script is controlled by the buttons at the top of the debugger window. By default the script will be run in the debugger in 'strict mode'. This tries to pick up things which you might not have intended by running the script in a stricter environment doing more checking. You can toggle this on/off by using the **strict mode** checkbox.

Starting and stopping

To start the script press the **Run** button. Execution of the script will start. If you have not defined any breakpoints then the script will run until it finishes (unless there are some script errors or <u>exceptions</u>). If there is a breakpoint then the debugger will stop execution of the script when it reaches it. If the script is running and you want to pause execution of the script at any time you can press **Interrupt**.

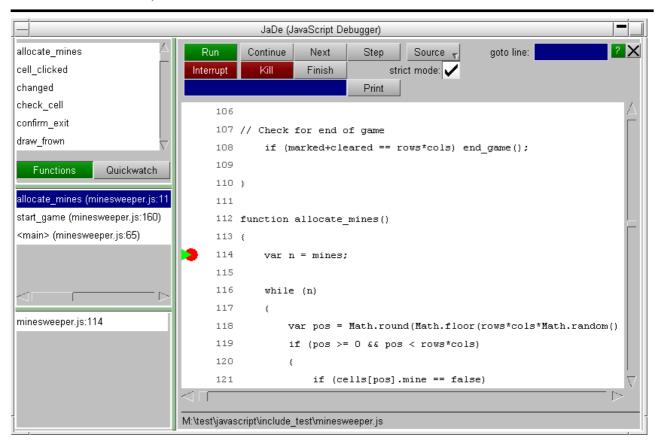

The line that the debugger has paused the script on is shown by a green triangle. In the above example it is paused at line 114. The middle panel on the left shows the <u>call stack</u>. See the <u>call stack section below</u> for more details.

Stepping and continuing

Once the script is paused in the debugger you can step through the source code by using the **Continue**, **Next**, **Step** and **Finish** buttons.

Continue will resume execution of the script again.

Next continues to the next line in the current function. i.e. it will step *over* a function call.

Step continues execution to the next source line (which may be in a different function. i.e. it will step *into* a function call).

Finish will finish executing the current function and stop at the next line in the calling function (the function above this in the <u>call stack</u>).


Alternatively, if you want to continue until a particular line you can right click on the line you want to continue until and select **Continue to here** from the popup.

Printing the value of a variable


If you want to see the value of a variable you can type the name of the variable you want to see in the textbox at the top of the debugger and press **Print**. JaDe will evaluate the variable and output the result in the statusbar at the bottom of the debugger.

Using Quickwatch

If you want to look at the values for lots of variables it is annoying to have to type the variable name in and press **Print** for each one. A better way is to use **Quickwatch** at the top left of JaDe

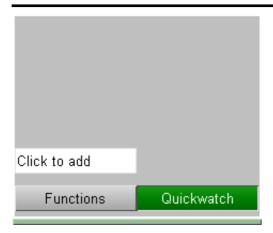


Type the name of the variable that you want to watch in the **Click to add** textbox. A line will be added for the variable showing its name and value. e.g. in the following image the variable mines is being displayed and its current value is 10. If the value is very long hover over the value to get the whole string.

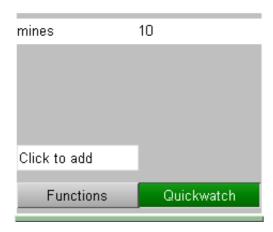

You can add any number of variables to watch. To remove one right click on the variable and select **Remove quickwatch** from the popup.


If a variable exists and has been assigned to then the value is displayed. e.g. mines in the following example. If the variable exists but it has not yet had a value assigned its value is the undefined value. e.g. pos in the following example.

If the variable does not exist the value is shown as! invalid! .e.g. fred in the following example.

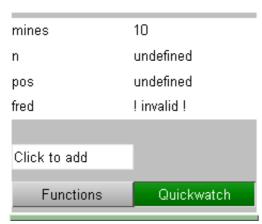

The call stack

The call stack shows which functions have been called in the script to get to the current point. It is the middle left window in JaDe.

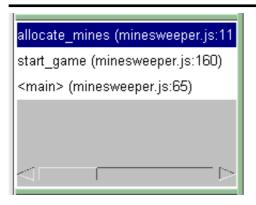

The top line shows the function that the script is currently paused at. The other lines show the calling functions in order. The above example can be read as:

- 1. The script starts
- 2. On line 65 in script file minesweeper.js in the 'main' program the function start game is called.
- 3. On line 160 in script file minesweeper.js in function start game the function allocate mines is called
- 4. On line 114 in script file minesweeper.js in function allocate_mines the script is paused.

This information is sometimes very useful in more complicated scripts to find out the order things are done in.

The function that the user is currently looking at is highlighted in blue. You can move up or down the call stack by clicking on a line. The main text window will jump to the correct file and line. The line will be shown with a blue triangle instead of a green triangle.

Exceptions

Sometimes when developing a script you get errors that you need to try to investigate and fix. e.g. an object is null when it should be defined or you try to call a method that does not exist for an object. In these cases an exception is thrown by JavaScript and the script would terminate is run normally. JaDe will trap the exception and stop at the line where the exception occured. e.g. If for example you has the following code:

```
var w = new Window('Example', 0.5, 1.0, 0.5, 1.0);
w.BadMethod();
w.Show()
```

There is no method called BadMethod for a Window. JaDe will stop at this point and allow you to look at the script.

Licences used in software

The Oasys LS-DYNA environment Ltd software uses several third party libraries and executables. The licences for them are given below

Expat

Copyright (c) 1998, 1999, 2000 Thai Open Source Software Center Ltd and Clark Cooper

Copyright (c) 2001, 2002, 2003, 2004, 2005, 2006 Expat maintainers. Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.
THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE

FreeType

Portions of this software are copyright The FreeType Project (www.freetype.org). All rights reserved.

The FreeType Project LICENSE

2006-Jan-27

Copyright 1996-2002, 2006 by

David Turner, Robert Wilhelm, and Werner Lemberg

Introduction

The FreeType Project is distributed in several archive packages; some of them may contain, in addition to the FreeType font engine, various tools and contributions which rely on, or relate to, the FreeType Project.

license applies to all files found in such packages, and which do not fall under their own explicit license. The license affects thus the FreeType font engine, the test programs, documentation and makefiles, at the very least.

was inspired by the BSD, Artistic, This license and IJG (Independent JPEG Group) licenses, which all encourage inclusion and use of free software in commercial and freeware products alike. As a consequence, its main points are that:

- o We don't promise that this software works. However, we will be interested in any kind of bug reports. ('as is' distribution)
- o You can use this software for whatever you want, in parts or full form, without having to pay us. ('royalty-free' usage)
- o You may not pretend that you wrote this software. If you use it, or only parts of it, in a program, you must acknowledge somewhere in your documentation that you have used the FreeType code. ('credits')

specifically permit and encourage the inclusion of this software, with or without modifications, in commercial products. We disclaim all warranties covering The FreeType Project and assume no liability related to The FreeType Project.

Finally, many people asked us for a preferred form for credit/disclaimer to use in compliance with this license. We thus encourage you to use the following text:

Portions of this software are copyright The FreeType Project (www.freetype.org). All rights reserved.

Please replace with the value from the FreeType version you actually use.

Legal Terms

=========

0. Definitions

Throughout this license, the terms 'package', 'FreeType Project', and 'FreeType archive' refer to the set of files originally distributed by the authors (David Turner, Robert Wilhelm, and Werner Lemberg) as the 'FreeType Project', be they named as alpha, beta or final release.

'You' refers to the licensee, or person using the project, where 'using' is a generic term including compiling the project's source code as well as linking it to form a 'program' or 'executable'. This program is referred to as 'a program using the FreeType engine'.

This license applies to all files distributed in the original FreeType Project, including all source code, binaries and documentation, unless otherwise stated in the file in its original, unmodified form as distributed in the original archive. If you are unsure whether or not a particular file is covered by this license, you must contact us to verify this. The FreeType Project is copyright (C) 1996-2000 by David Turner,

The FreeType Project is copyright (C) 1996-2000 by David Turner, Robert Wilhelm, and Werner Lemberg. All rights reserved except as specified below.

1. No Warranty

THE FREETYPE PROJECT IS PROVIDED 'AS IS' WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT WILL ANY OF THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY DAMAGES CAUSED BY THE USE OR THE INABILITY TO USE, OF THE FREETYPE PROJECT.

2. Redistribution

This license grants a worldwide, royalty-free, perpetual and irrevocable right and license to use, execute, perform, compile, display, copy, create derivative works of, distribute and sublicense the FreeType Project (in both source and object code forms) and derivative works thereof for any purpose; and to authorize others to exercise some or all of the rights granted herein, subject to the following conditions:

- o Redistribution of source code must retain this license file ('FTL.TXT') unaltered; any additions, deletions or changes to the original files must be clearly indicated in accompanying documentation. The copyright notices of the unaltered, original files must be preserved in all copies of source files.
- o Redistribution in binary form must provide a disclaimer that states that the software is based in part of the work of the FreeType Team, in the distribution documentation. We also encourage you to put an URL to the FreeType web page in your documentation, though this isn't mandatory.

These conditions apply to any software derived from or based on the FreeType Project, not just the unmodified files. If you use our work, you must acknowledge us. However, no fee need be paid to us.

3. Advertising

Neither the FreeType authors and contributors nor you shall use the name of the other for commercial, advertising, or promotional purposes without specific prior written permission.

We suggest, but do not require, that you use one or more of the following phrases to refer to this software in your documentation or advertising materials: 'FreeType Project', 'FreeType Engine', 'FreeType library', or 'FreeType Distribution'.

As you have not signed this license, you are not required to accept it. However, as the FreeType Project is copyrighted

material, only this license, or another one contracted with the authors, grants you the right to use, distribute, and modify it. Therefore, by using, distributing, or modifying the FreeType Project, you indicate that you understand and accept all the terms of this license.

4. Contacts

There are two mailing lists related to FreeType:

o freetype@nongnu.org

Discusses general use and applications of FreeType, as well as future and wanted additions to the library and distribution. If you are looking for support, start in this list if you haven't found anything to help you in the documentation.

o freetype-devel@nongnu.org
Discusses bugs, as well as engine internals, design issues, specific licenses, porting, etc.

Our home page can be found at http://www.freetype.org
--- end of FTL.TXT ---

FFmpeg

FFmpeg is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

FFmpeg is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with FFmpeg; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Jpeg

conditions:

The authors make NO WARRANTY or representation, either express or implied, with respect to this software, its quality, accuracy, merchantability, or fitness for a particular purpose. This software is provided "AS IS", and you, its user, assume the entire risk as to its quality and accuracy. This software is copyright (C) 1991-2012, Thomas G. Lane, Guido Vollbeding. All Rights Reserved except as specified below. Permission is hereby granted to use, copy, modify, and distribute this software (or portions thereof) for any purpose, without fee, subject to these

- (1) If any part of the source code for this software is distributed, then this README file must be included, with this copyright and no-warranty notice unaltered; and any additions, deletions, or changes to the original files must be clearly indicated in accompanying documentation.
- (2) If only executable code is distributed, then the accompanying documentation must state that "this software is based in part on the work of the Independent JPEG Group".
- (3) Permission for use of this software is granted only if the user accepts full responsibility for any undesirable consequences; the authors accept NO LIABILITY for damages of any kind.

These conditions apply to any software derived from or based on the IJG code, not just to the unmodified library. If you use our work, you ought to acknowledge us.

Permission is NOT granted for the use of any IJG author's name or company name in advertising or publicity relating to this software or products derived from it. This software may be referred to only as "the Independent JPEG Group's software".

We specifically permit and encourage the use of this software as the basis of commercial products, provided that all warranty or liability claims are assumed by the product vendor.

Libcurl

COPYRIGHT AND PERMISSION NOTICE

Copyright (c) 1996 - 2012, Daniel Stenberg, <daniel@haxx.se>.

All rights reserved.

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization of the copyright holder.

Libfame

libfame - Fast Assembly MPEG Encoder Library
Copyright (C) 2000-2001 Vivien Chappelier
This library is free software; you can redistribute it and/or
modify it under the terms of the GNU Library General Public
License as published by the Free Software Foundation; either
version 2 of the License, or (at your option) any later version.
This library is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU
Library General Public License for more details.
You should have received a copy of the GNU Library General Public
License along with this library; if not, write to the Free
Software Foundation, Inc., 675 Mass Ave, Cambridge, MA 02139, USA.

Libgif

The GIFLIB distribution is Copyright (c) 1997 Eric S. Raymond Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Libpng

This copy of the libpng notices is provided for your convenience. In case of any discrepancy between this copy and the notices in the file png.h that is included in the libpng distribution, the latter shall prevail.

COPYRIGHT NOTICE. DISCLAIMER, and LICENSE:

COPYRIGHT NOTICE, DISCLAIMER, and LICENSE:
If you modify libpng you may insert additional notices immediately following this sentence.

This code is released under the libpng license.

libpng versions 1.2.6, August 15, 2004, through 1.5.11, June 14, 2012, are Copyright (c) 2004, 2006-2012 Glenn Randers-Pehrson, and are

distributed according to the same disclaimer and license as libpng-1.2.5 with the following individual added to the list of Contributing Authors Cosmin Truta

libpng versions 1.0.7, July 1, 2000, through 1.2.5 - October 3, 2002, are Copyright (c) 2000-2002 Glenn Randers-Pehrson, and are distributed according to the same disclaimer and license as libpng-1.0.6

```
with the following individuals added to the list of Contributing Authors
   Simon-Pierre Cadieux
   Eric S. Raymond
   Gilles Vollant
and with the following additions to the disclaimer:
   There is no warranty against interference with your enjoyment of the
    library or against infringement. There is no warranty that our
   efforts or the library will fulfill any of your particular purposes or needs. This library is provided with all faults, and the entire
   risk of satisfactory quality, performance, accuracy, and effort is with
   the user.
libpng versions 0.97, January 1998, through 1.0.6, March 20, 2000, are
Copyright (c) 1998, 1999 Glenn Randers-Pehrson, and are
distributed according to the same disclaimer and license as libpng-0.96,
with the following individuals added to the list of Contributing Authors:
    Tom Lane
   Glenn Randers-Pehrson
   Willem van Schaik
libpng versions 0.89, June 1996, through 0.96, May 1997, are
Copyright (c) 1996, 1997 Andreas Dilger
Distributed according to the same disclaimer and license as libpng-0.88,
with the following individuals added to the list of Contributing Authors:
   John Bowler
   Kevin Bracey
   Sam Bushell
   Magnus Holmgren
   Greg Roelofs
   Tom Tanner
libpng versions 0.5, May 1995, through 0.88, January 1996, are Copyright (c) 1995, 1996 Guy Eric Schalnat, Group 42, Inc. For the purposes of this copyright and license, "Contributing Authors"
is defined as the following set of individuals:
   Andreas Dilger
   Dave Martindale
   Guy Eric Schalnat
   Paul Schmidt
   Tim Wegner
The PNG Reference Library is supplied "AS IS". The Contributing Authors
and Group 42, Inc. disclaim all warranties, expressed or implied, including, without limitation, the warranties of merchantability and of fitness for any purpose. The Contributing Authors and Group 42, Inc.
assume no liability for direct, indirect, incidental, special, exemplary,
or consequential damages, which may result from the use of the PNG Reference Library, even if advised of the possibility of such damage.
Permission is hereby granted to use, copy, modify, and distribute this source code, or portions hereof, for any purpose, without fee, subject
to the following restrictions:
1. The origin of this source code must not be misrepresented.
2. Altered versions must be plainly marked as such and must not
   be misrepresented as being the original source.
3. This Copyright notice may not be removed or altered from any
   source or altered source distribution.
The Contributing Authors and Group 42, Inc. specifically permit, without
fee, and encourage the use of this source code as a component to
supporting the PNG file format in commercial products. If you use this
source code in a product, acknowledgment is not required but would be
appreciated.
A "png get copyright" function is available, for convenient use in "about"
boxes and the like:
   printf("%s",png get copyright(NULL));
Also, the PNG logo (in PNG format, of course) is supplied in the files "pngbar.png" and "pngbar.jpg (88x31) and "pngnow.png" (98x31).
Libpng is OSI Certified Open Source Software. OSI Certified Open Source is a
certification mark of the Open Source Initiative.
Glenn Randers-Pehrson
glennrp at users.sourceforge.net
June 14, 2012
```

Libxlsxwriter

Libxlsxwriter is released under a FreeBSD license:

Copyright 2014-2016, John McNamara

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution. THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

 The views and conclusions contained in the software and documentation are those of the authors and should not be interpreted as representing official policies, either expressed or implied, of the FreeBSD Project. Libxlsxwriter includes 'queue.h' from FreeBSD and the 'minizip' component of

Queue.h from FreeBSD:

Copyright (c) 1991, 1993

'zlib' which have the following licenses:

The Regents of the University of California. All rights reserved. Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- 1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- 4. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS 'AS IS' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Zlib has the following License/Copyright:

(C) 1995-2013 Jean-loup Gailly and Mark Adler

This software is provided 'as-is', without any express or implied warranty. In no event will the authors be held liable for any damages arising from the use of this software.

Permission is granted to anyone to use this software for any purpose, including commercial applications, and to alter it and redistribute it freely, subject to the following restrictions:

- 1. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.
- 2. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
- 3. This notice may not be removed or altered from any source distribution.

Jean-loup Gailly Mark Adler

jloup@gzip.org madler@alumni.caltech.edu

Openssl

```
LICENSE ISSUES
  ______
 The OpenSSL toolkit stays under a double license, i.e. both the conditions of
 the OpenSSL License and the original SSLeay license apply to the toolkit.
 See below for the actual license texts.
 OpenSSL License
* Copyright (c) 1998-2017 The OpenSSL Project. All rights reserved.
 * Redistribution and use in source and binary forms, with or without
 * modification, are permitted provided that the following conditions
 * are met:
 * 1. Redistributions of source code must retain the above copyright
     notice, this list of conditions and the following disclaimer.
  2. Redistributions in binary form must reproduce the above copyright
     notice, this list of conditions and the following disclaimer in
      the documentation and/or other materials provided with the
     distribution.
  3. All advertising materials mentioning features or use of this
      software must display the following acknowledgment:
      "This product includes software developed by the OpenSSL Project
      for use in the OpenSSL Toolkit. (http://www.openssl.org/)"
  4. The names "OpenSSL Toolkit" and "OpenSSL Project" must not be used to
     endorse or promote products derived from this software without
     prior written permission. For written permission, please contact
     openssl-core@openssl.org.
  5. Products derived from this software may not be called "OpenSSL"
     \hbox{nor may "OpenSSL" appear in their names without prior written}\\
     permission of the OpenSSL Project.
 * 6. Redistributions of any form whatsoever must retain the following
     acknowledgment:
     "This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (http://www.openssl.org/)"
 * THIS SOFTWARE IS PROVIDED BY THE OpenSSL PROJECT ''AS IS'' AND ANY
 * EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
 * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR
 * PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OpenSSL PROJECT OR
 * ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
 * SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT
 * NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; * LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
 * HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT,
 * STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
 * ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED
 * OF THE POSSIBILITY OF SUCH DAMAGE.
 * ------
 * This product includes cryptographic software written by Eric Young
 * (eay@cryptsoft.com). This product includes software written by Tim
 * Hudson (tjh@cryptsoft.com).
Original SSLeay License
/* Copyright (C) 1995-1998 Eric Young (eay@cryptsoft.com)
 * All rights reserved.
 * This package is an SSL implementation written
 * by Eric Young (eay@cryptsoft.com).
 * The implementation was written so as to conform with Netscapes SSL.
```

```
* This library is free for commercial and non-commercial use as long as
* the following conditions are aheared to. The following conditions
* apply to all code found in this distribution, be it the RC4, RSA, * lhash, DES, etc., code; not just the SSL code. The SSL documentation
* included with this distribution is covered by the same copyright terms
* except that the holder is Tim Hudson (tjh@cryptsoft.com).
* Copyright remains Eric Young's, and as such any Copyright notices in
* the code are not to be removed.
* If this package is used in a product, Eric Young should be given attribution
 as the author of the parts of the library used.
* This can be in the form of a textual message at program startup or
* in documentation (online or textual) provided with the package.
* Redistribution and use in source and binary forms, with or without
* modification, are permitted provided that the following conditions
* 1. Redistributions of source code must retain the copyright
     notice, this list of conditions and the following disclaimer.
 2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the
     documentation and/or other materials provided with the distribution.
 3. All advertising materials mentioning features or use of this software
     must display the following acknowledgement:
     "This product includes cryptographic software written by
      Eric Young (eay@cryptsoft.com) "
     The word 'cryptographic' can be left out if the rouines from the library
     being used are not cryptographic related :-).
 4. If you include any Windows specific code (or a derivative thereof) from
     the apps directory (application code) you must include an acknowledgement:
     "This product includes software written by Tim Hudson (tjh@cryptsoft.com)"
* THIS SOFTWARE IS PROVIDED BY ERIC YOUNG ''AS IS'' AND
* ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
* IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
* ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE
* FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
* DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS
* OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
* HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT
* LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY
* OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF
* SUCH DAMAGE.
* The licence and distribution terms for any publically available version or
* derivative of this code cannot be changed. i.e. this code cannot simply be
* copied and put under another distribution licence
* [including the GNU Public Licence.]
```

PCRE

```
PCRE LICENCE
```

PCRE is a library of functions to support regular expressions whose syntax and semantics are as close as possible to those of the Perl 5 language. Release 7 of PCRE is distributed under the terms of the "BSD" licence, as specified below. The documentation for PCRE, supplied in the "doc" directory, is distributed under the same terms as the software itself. The basic library functions are written in C and are freestanding. Also included in the distribution is a set of C++ wrapper functions. THE BASIC LIBRARY FUNCTIONS

```
Written by:
                 Philip Hazel
Email local part: ph10
Email domain:
                 cam.ac.uk
```

University of Cambridge Computing Service,

Cambridge, England. Copyright (c) 1997-2008 University of Cambridge

```
All rights reserved.
THE C++ WRAPPER FUNCTIONS
Contributed by: Google Inc.
Copyright (c) 2007-2008, Google Inc.
All rights reserved.
THE "BSD" LICENCE
```

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- Neither the name of the University of Cambridge nor the name of Google Inc. nor the names of their contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE. End

PDFHummus

```
Is licensed under the Apache License:
Copyright 2011 Gal Kahana PDFWriter
Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at
http://www.apache.org/licenses/LICENSE-2.0
Unless required by applicable law or agreed to in writing, software
distributed under the License is distributed on an "AS IS" BASIS,
WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
See the License for the specific language governing permissions and
limitations under the License.
```

POV-Ray

Is licensed under the GNU AFFERO GENERAL PUBLIC LICENSE Version 3, 19 November 2007 which may be found here http://www.povray.org/povlegal.html

Oasys Ltd use the POV-Ray executable in unmodified form as a separate, stand-alone entity. We have not modified the source code or the executable in any way.

We convey the executable as part of our installation package, and in accordance with the licence:

• Users who install POV-Ray must accept the licence terms cited above.

- We provide a download of the POV-Ray executable and source code on our website http://www.oasys-software.com/dyna/en/

SmoothSort

Is licensed under the Creative Commons Attribution-ShareAlike 3.0 license which may be found here:

https://creativecommons.org/licenses/by-sa/3.0/legalcode

Oasys Ltd acknowledge Wikibooks as the source of this algorithm, which is used in unmodified form.

Spidermonkey

Mozilla Public License Version 2.0

1. Definitions

1.1. "Contributor"

means each individual or legal entity that creates, contributes to the creation of, or owns Covered Software.

1.2. "Contributor Version"

means the combination of the Contributions of others (if any) used by a Contributor and that particular Contributor's Contribution.

1.3. "Contribution"

means Covered Software of a particular Contributor.

1.4. "Covered Software"

means Source Code Form to which the initial Contributor has attached the notice in Exhibit A, the Executable Form of such Source Code Form, and Modifications of such Source Code Form, in each case including portions thereof.

1.5. "Incompatible With Secondary Licenses"

means

- (a) that the initial Contributor has attached the notice described in Exhibit B to the Covered Software; or
- (b) that the Covered Software was made available under the terms of version 1.1 or earlier of the License, but not also under the terms of a Secondary License.
- 1.6. "Executable Form"

means any form of the work other than Source Code Form.

1.7. "Larger Work"

means a work that combines Covered Software with other material, in a separate file or files, that is not Covered Software.

1.8. "License"

means this document.

1.9. "Licensable"

means having the right to grant, to the maximum extent possible, whether at the time of the initial grant or subsequently, any and all of the rights conveyed by this License.

1.10. "Modifications"

means any of the following:

- (a) any file in Source Code Form that results from an addition to, deletion from, or modification of the contents of Covered Software; or
- (b) any new file in Source Code Form that contains any Covered Software.
- 1.11. "Patent Claims" of a Contributor

means any patent claim(s), including without limitation, method, process, and apparatus claims, in any patent Licensable by such Contributor that would be infringed, but for the grant of the License, by the making, using, selling, offering for sale, having made, import, or transfer of either its Contributions or its Contributor Version.

1.12. "Secondary License"

means either the GNU General Public License, Version 2.0, the GNU Lesser General Public License, Version 2.1, the GNU Affero General Public License, Version 3.0, or any later versions of those licenses.

1.13. "Source Code Form"

means the form of the work preferred for making modifications.

1.14. "You" (or "Your")

means an individual or a legal entity exercising rights under this License. For legal entities, "You" includes any entity that controls, is controlled by, or is under common control with You. For purposes of this definition, "control" means (a) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (b) ownership of more than

fifty percent (50%) of the outstanding shares or beneficial ownership of such entity.

2. License Grants and Conditions

2.1. Grants

Each Contributor hereby grants You a world-wide, royalty-free, non-exclusive license:

- (a) under intellectual property rights (other than patent or trademark) Licensable by such Contributor to use, reproduce, make available, modify, display, perform, distribute, and otherwise exploit its Contributions, either on an unmodified basis, with Modifications, or as part of a Larger Work; and
- (b) under Patent Claims of such Contributor to make, use, sell, offer for sale, have made, import, and otherwise transfer either its Contributions or its Contributor Version.
- 2.2. Effective Date

The licenses granted in Section 2.1 with respect to any Contribution become effective for each Contribution on the date the Contributor first distributes such Contribution.

2.3. Limitations on Grant Scope

The licenses granted in this Section 2 are the only rights granted under this License. No additional rights or licenses will be implied from the distribution or licensing of Covered Software under this License. Notwithstanding Section 2.1(b) above, no patent license is granted by a Contributor:

- (a) for any code that a Contributor has removed from Covered Software;
- (b) for infringements caused by: (i) Your and any other third party's modifications of Covered Software, or (ii) the combination of its Contributions with other software (except as part of its Contributor Version); or
- (c) under Patent Claims infringed by Covered Software in the absence of its Contributions.

This License does not grant any rights in the trademarks, service marks, or logos of any Contributor (except as may be necessary to comply with the notice requirements in Section 3.4).

2.4. Subsequent Licenses

No Contributor makes additional grants as a result of Your choice to distribute the Covered Software under a subsequent version of this License (see Section 10.2) or under the terms of a Secondary License (if permitted under the terms of Section 3.3).

2.5. Representation

Each Contributor represents that the Contributor believes its Contributions are its original creation(s) or it has sufficient rights to grant the rights to its Contributions conveyed by this License. 2.6. Fair Use

This License is not intended to limit any rights You have under applicable copyright doctrines of fair use, fair dealing, or other equivalents.

2.7. Conditions

Sections 3.1, 3.2, 3.3, and 3.4 are conditions of the licenses granted in Section 2.1.

3. Responsibilities

- 3.1. Distribution of Source Form
- All distribution of Covered Software in Source Code Form, including any Modifications that You create or to which You contribute, must be under the terms of this License. You must inform recipients that the Source Code Form of the Covered Software is governed by the terms of this License, and how they can obtain a copy of this License. You may not attempt to alter or restrict the recipients' rights in the Source Code Form.
- 3.2. Distribution of Executable Form
- If You distribute Covered Software in Executable Form then:
- (a) such Covered Software must also be made available in Source Code Form, as described in Section 3.1, and You must inform recipients of the Executable Form how they can obtain a copy of such Source Code Form by reasonable means in a timely manner, at a charge no more than the cost of distribution to the recipient; and
- (b) You may distribute such Executable Form under the terms of this License, or sublicense it under different terms, provided that the

license for the Executable Form does not attempt to limit or alter the recipients' rights in the Source Code Form under this License. 3.3. Distribution of a Larger Work

You may create and distribute a Larger Work under terms of Your choice, provided that You also comply with the requirements of this License for the Covered Software. If the Larger Work is a combination of Covered Software with a work governed by one or more Secondary Licenses, and the Covered Software is not Incompatible With Secondary Licenses, this License permits You to additionally distribute such Covered Software under the terms of such Secondary License(s), so that the recipient of the Larger Work may, at their option, further distribute the Covered Software under the terms of either this License or such Secondary License(s).

3.4. Notices

You may not remove or alter the substance of any license notices (including copyright notices, patent notices, disclaimers of warranty, or limitations of liability) contained within the Source Code Form of the Covered Software, except that You may alter any license notices to the extent required to remedy known factual inaccuracies.

3.5. Application of Additional Terms

You may choose to offer, and to charge a fee for, warranty, support, indemnity or liability obligations to one or more recipients of Covered Software. However, You may do so only on Your own behalf, and not on behalf of any Contributor. You must make it absolutely clear that any such warranty, support, indemnity, or liability obligation is offered by You alone, and You hereby agree to indemnify every Contributor for any liability incurred by such Contributor as a result of warranty, support, indemnity or liability terms You offer. You may include additional disclaimers of warranty and limitations of liability specific to any jurisdiction.

4. Inability to Comply Due to Statute or Regulation

If it is impossible for You to comply with any of the terms of this License with respect to some or all of the Covered Software due to statute, judicial order, or regulation then You must: (a) comply with the terms of this License to the maximum extent possible; and (b) describe the limitations and the code they affect. Such description must be placed in a text file included with all distributions of the Covered Software under this License. Except to the extent prohibited by statute or regulation, such description must be sufficiently detailed for a recipient of ordinary skill to be able to understand it.

5. Termination

5.1. The rights granted under this License will terminate automatically if You fail to comply with any of its terms. However, if You become compliant, then the rights granted under this License from a particular Contributor are reinstated (a) provisionally, unless and until such Contributor explicitly and finally terminates Your grants, and (b) on an ongoing basis, if such Contributor fails to notify You of the non-compliance by some reasonable means prior to 60 days after You have come back into compliance. Moreover, Your grants from a particular Contributor are reinstated on an ongoing basis if such Contributor notifies You of the non-compliance by some reasonable means, this is the first time You have received notice of non-compliance with this License from such Contributor, and You become compliant prior to 30 days after Your receipt of the notice.

5.2. If You initiate litigation against any entity by asserting a patent infringement claim (excluding declaratory judgment actions, counter-claims, and cross-claims) alleging that a Contributor Version directly or indirectly infringes any patent, then the rights granted to You by any and all Contributors for the Covered Software under Section 2.1 of this License shall terminate.

5.3. In the event of termination under Sections 5.1 or 5.2 above, all end user license agreements (excluding distributors and resellers) which have been validly granted by You or Your distributors under this License prior to termination shall survive termination.

* Covered Software is provided under this License on an "as is"

* basis, without warranty of any kind, either expressed, implied, or

* statutory, including, without limitation, warranties that the

* Covered Software is free of defects, merchantable, fit for a

* particular purpose or non-infringing. The entire risk as to the

* quality and performance of the Covered Software is with You.

* Should any Covered Software prove defective in any respect, You

* (not any Contributor) assume the cost of any necessary servicing,

* repair, or correction. This disclaimer of warranty constitutes an

* essential part of this License. No use of any Covered Software is

* authorized under this License except under this disclaimer.

*

7. Limitation of Liability

Under no circumstances and under no legal theory, whether tort (including negligence), contract, or otherwise, shall any Contributor, or anyone who distributes Covered Software as permitted above, be liable to You for any direct, indirect, special, incidental, or consequential damages of any character including, without limitation, damages for lost profits, loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses, even if such party shall have been informed of the possibility of such damages. This limitation of liability shall not apply to liability for death or personal injury resulting from such party's negligence to the extent applicable law prohibits such limitation. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so this exclusion and limitation may not apply to You.

8. Litigation

Any litigation relating to this License may be brought only in the courts of a jurisdiction where the defendant maintains its principal place of business and such litigation shall be governed by laws of that jurisdiction, without reference to its conflict-of-law provisions. Nothing in this Section shall prevent a party's ability to bring cross-claims or counter-claims.

9. Miscellaneous

This License represents the complete agreement concerning the subject matter hereof. If any provision of this License is held to be unenforceable, such provision shall be reformed only to the extent necessary to make it enforceable. Any law or regulation which provides that the language of a contract shall be construed against the drafter shall not be used to construe this License against a Contributor. 10. Versions of the License

TO: VEIBIONS OF THE BECCHSE

10.1. New Versions

Mozilla Foundation is the license steward. Except as provided in Section 10.3, no one other than the license steward has the right to modify or publish new versions of this License. Each version will be given a distinguishing version number.

10.2. Effect of New Versions

You may distribute the Covered Software under the terms of the version of the License under which You originally received the Covered Software, or under the terms of any subsequent version published by the license steward.

10.3. Modified Versions

If you create software not governed by this License, and you want to create a new license for such software, you may create and use a modified version of this License if you rename the license and remove any references to the name of the license steward (except to note that such modified license differs from this License).

10.4. Distributing Source Code Form that is Incompatible With Secondary Licenses

If You choose to distribute Source Code Form that is Incompatible With Secondary Licenses under the terms of this version of the License, the notice described in Exhibit B of this License must be attached. Exhibit A - Source Code Form License Notice

This Source Code Form is subject to the terms of the Mozilla Public License, v. 2.0. If a copy of the MPL was not distributed with this file, You can obtain one at http://mozilla.org/MPL/2.0/.

If it is not possible or desirable to put the notice in a particular file, then You may include the notice in a location (such as a LICENSE file in a relevant directory) where a recipient would be likely to look for such a notice.

You may add additional accurate notices of copyright ownership. Exhibit B - "Incompatible With Secondary Licenses" Notice

This Source Code Form is "Incompatible With Secondary Licenses", as defined by the Mozilla Public License, v. 2.0.

Win-iconv

win_iconv is a iconv implementation using Win32 API to convert.
win_iconv is placed in the public domain.
Yukihiro Nakadaira <yukihiro.nakadaira@gmail.com>

Zlib

(C) 1995-2013 Jean-loup Gailly and Mark Adler This software is provided 'as-is', without any express or implied warranty. In no event will the authors be held liable for any damages arising from the use of this software.

Permission is granted to anyone to use this software for any purpose, including commercial applications, and to alter it and redistribute it freely, subject to the following restrictions:

- 1. The origin of this software must not be misrepresented; you must not claim that you wrote the original software. If you use this software in a product, an acknowledgment in the product documentation would be appreciated but is not required.
- 2. Altered source versions must be plainly marked as such, and must not be misrepresented as being the original software.
- 3. This notice may not be removed or altered from any source distribution. Jean-loup Gailly Mark Adler jloup@gzip.org madler@alumni.caltech.edu

Fonts on Linux

Like earlier versions the Oasys suite version 16 uses "legacy" X11 fixed fonts on Linux. (This will change in version 17.)

This can cause problems on more recent Linux distributions which do not include the required fonts packages by default, symptoms being any or all of:

- Messages about missing fonts when software starts.
- Some fonts are missing in the user interface.
- Some or all fonts look wrong.

This problem can be solved by installing the missing "xorg" legacy font packages on the system. The following are a typical minimum installation, more may be available if you search your repository for "xorg" fonts.

You will need root privileges to install these, so unless you are familiar with working as root and using commands such as "rpm", "yum" or "yast" please seek help from your IT department, or alternatively contact Oasys Ltd.

RedHat / CentOS 7

```
xorg-x11-fonts-100dpi
xorg-x11-fonts-75dpi
xorg-x11-fonts-ISO8859-1-100dpi
xorg-x11-fonts-ISO8859-1-75dpi
xorg-x11-fonts-Type1
xorg-x11-fonts-misc
```

You don't have to install all of these.

The 75dpi and 100dpi font packages are the same typefaces at different resolutions. You should choose the one which gives the best looking results on your display, but on modern displays the 100dpi one is likely to look better.

SUSE 12

```
xorg-x11-fonts-core
xorg-x11-fonts
```